

ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

1021 NORTH GRAND AVENUE EAST, P.O. BOX 19276, SPRINGFIELD, ILLINOIS 62794-9276 - (217) 782-2829 JAMES R. THOMPSON CENTER, 100 WEST RANDOLPH, SUITE 11-300, CHICAGO, IL 60601 - (312) 814-6026

217/524-3300

September 3, 2009

Douglas P. Scott, Director Certified Mail 7002 3150 0000 1111 0837 7002 3150 0000 1111 0844

Clean Harbors Services, Inc. Attn: James R. Laubsted 11800 South Stony Island Chicago, Illinois 60617 Illinois International Port District Attn: Anthony G. Ianello 3600 East 95th Street 95th & the Lakefront Chicago, Illinois 60617-5193

Re: 0316000051 -- Cook County Clean Harbors Svcs, Inc. ILD000608471 RCRA Log # B-16R-M-15 RCRA Permits Permit Approval



Dear Gentleman:

This letter is in response to your letter dated June 3, 2009, requesting a Class 1 modification to update the name, address, or phone numbers of coordinators, or other persons, or agencies as identified in the plan in accordance with 35 Ill Admin Code Part(s) 703, Appendices A(A)(1) and A(B)(6)(d) and to maintain training records electronically in addition to a hard copy in accordance with 35 Ill. Adm. Code Part 703, Appendices A(A)(1) and A(B)(3). The Agency has approved this modification request.

Approval of this modification is based upon review of (1) the RCRA permit issued to Clean Harbors Svcs, Inc., (2) the regulations (35 Ill. Adm. Code Subtitle G), and (3) the information contained in your submittals. Since this modification did not result in any changes to the language of the Permit, only the cover page reflecting the approval of this modification is being sent to you. This letter and the enclosed cover page should be attached to the front of your Part B Permit. Operations must be conducted in accordance with the approved RCRA Part B Permit issued to Clean Harbors Svcs, Inc., and all subsequent modifications to the Part B Permit.

Work required by this permit, your application or the regulations may also be subject to other laws governing professional services, such as the Illinois Professional Surveyor Act of 1989, the Professional Engineering Practice Act of 1989, the Professional Geologist Licensing Act, and the Structural Engineering Licensing Act of 1989. This permit does not relieve anyone from compliance with the regulations adopted pursuant to these laws. All work that falls within the scope and definitions of these laws must be performed in compliance with them. The Illinois EPA may refer any discovered violation of these laws to the appropriate regulating authority.

The Permittee must complete the public notice requirements for the Class 1 modification as requested in Log # B-16R-M-15. Pursuant to 35 Ill. Adm. Code 703.281(a)(2), a notice of the modification shall be sent to all persons on the facility mailing list, maintained by Illinois EPA in accordance with 35 Ill. Adm. Code 705.163(a)(4), and the appropriate units of the state and local government, as specified in 35 Ill. Adm. Code 705.163(a)(5). This notification must be made within ninety (90) days of the date of issuance of this letter.

If you have any additional questions in this matter, please contact Mr. Mark Schollenberger, P.E at 217/524-3307 of my staff.

Sincerely,

Stephen F. Nightingale, P.E.

Manager, Permit Section

Bureau of Land

SFN:KSG:bjh\051161s.doc

cc:

USEPA Region V

Attachment: RCRA Part B Cover Page



ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

1021 NORTH GRAND AVENUE EAST, P.O. BOX 19276, SPRINGFIELD, ILLINOIS 62794-9276 - (217) 782-2829 JAMES R. THOMPSON CENTER, 100 WEST RANDOLPH, SUITE 11-300, CHICAGO, IL 60601 - (312) 814-6026

ROD R. BLAGOJEVICH, GOVERNOR

DOUGLAS P. SCOTT, DIRECTOR

ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

HAZARDOUS WASTE MANAGEMENT RCRA PART B PERMIT

IEPA 0316000051 -- Cook County USEPA ILD000608471 Clean Harbors Svcs Inc Permit Log No. B-16R-M-15 RCRA -- Part B – Permit File Issue Date: November 4, 2005 Effective Date: December 9, 2005 Expiration Date: December 9, 2016

Modification Effective Date: September 3, 2009

Illinois International Port District 3600 East 95th Street 95th & the Lakefront Chicago, Illinois 60617-5193 Clean Harbors Svcs Inc 11800 South Stony Island Avenue Chicago, Illinois 60617

A Part B permit is hereby approved pursuant to the Resource Conservation and Recovery Act, Illinois Environmental Protection Act, and Title 35 Illinois Administrative Code (I.A.C.) parts 702, 703, 705, and 720 through 729 to Clean Harbors Svcs Inc and the Illinois International Port District (herein known as the Permittee(s)), to construct, maintain and operate a waste management facility involved in the treatment and storage of hazardous waste. The site is located at 11800 South Stony Island Avenue in Chicago, Illinois.

This permit consists of the conditions contained herein (including those in any attachments and appendices) and applicable regulations contained in the Illinois Environmental Protection Act and Title 35 I.A.C. Parts 702, 703, 705 and 720 through 729 in effect on the effective date of this permit. The Environmental Protection Act (Ill. Rev. Stat., Chapter 111 1/2, Section 1039) grants the Illinois Environmental Protection Agency the authority to impose conditions on permits which are issued. This Permit contains 225 pages including Attachments A through I.

If you have any questions regarding this final permit, please contact Mark Schollenberger at 217/524-3307.

Stephen F. Nightingale, P.E. Manager, Permit Section

Bureau of Land

SFN:MAS:bjh\051161s.doc

cc:

USEPA Region V



ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

1021 NORTH GRAND AVENUE EAST, P.O. BOX 19276, SPRINGFIELD, ILLINOIS 62794-9276 - (217) 782-2829 JAMES R. THOMPSON CENTER, 100 WEST RANDOLPH, SUITE 11-300, CHICAGO, IL 60601 - (312) 814-6026

217/524-3300

DOUGLAS P. SCOTT, DIRECTOR

July 13, 2009

Certified Mail 7008 1140 0004 7343 2082

Clean Harbors Services, Inc. Attn: Jim Laubsted 11800 South Stony Island Avenue Chicago, Illinois 60617

Re:

0316000051 -- Cook County Clean Harbors Services, Inc.

ILD000608471

Log No. B-16R-M-16

Received: RCRA Permit Permit Approval

Dear Mr. Laubsted:

This letter is in response to your submittal entitled, "Class 1* Permit Modification Request", dated June 15, 2009, requesting modification to the RCRA Part B Permit (Permit) for Clean Harbors Services, Inc. (Clean Harbors) Chicago facility. Specifically, the modification requested to reduce the post-closure financial assurance estimate for the costs of activities already performed.

The subject submittals were reviewed as a Class 1* permit modification request in accordance with 35 Ill. Adm. Code 703, Subpart G, and are hereby approved. This determination is based upon our review of (1) the Permit issued to CHSI, (2) the regulations [35 Ill. Adm. Code, Subtitle G] and (3) the information contained in your submittals. Operations must be conducted in accordance with the approved Permit originally issued to CHSI and all subsequent modifications to the Permit. Page F-3 of 3 of the Permit has been modified to reflect this change. Only the revised Illinois EPA Permit is enclosed, since no modification to the USEPA portion of the permit was made. Attachment 1 to this letter provides the modified language.

Work required by this permit, your application or the regulations may also be subject to other laws governing professional services, such as the Illinois Professional Land Surveyor Act of 1989, the Professional Engineering Practice Act of 1989, the Professional Geologist Licensing Act, and the Structural Engineering Licensing Act of 1989. This permit does not relieve anyone from compliance with these laws and regulations adopted pursuant to these laws. All work that falls within the scope and definitions of these laws must be performed in compliance with them. The Illinois EPA may refer any discovered violation of these laws to the appropriate regulating authority.

Page 2

Should you have any questions regarding the Permit, please contact Mark A. Schollenberger of my staff at 217/524-3307.

Sincerely,

Stephen F. Nightingale, P.E. Manager, Permit Section

Bureau of Land

SFN:MAS:bjh\072525s.doc

cc: Dale Meyer, USEPA Region 5

Illinois International Port District

Attachment 1

Page F-3 of 3 under Section II in Attachment F has been modified as follows:

The annual cost of post-closure care was revised to \$215,832 and the total remaining cost to \$3,430,422. These costs are in 2009 dollars.

SFN:MAS:bjh\072525s.doc



ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

1021 NORTH GRAND AVENUE EAST, P.O. BOX 19276, SPRINGFIELD, ILLINOIS 62794-9276 - (217) 782-2829 JAMES R. THOMPSON CENTER, 100 WEST RANDOLPH, SUITE 11-300, CHICAGO, IL 60601 - (312) 814-6026

DOUGLAS P. SCOTT, DIRECTOR

ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

HAZARDOUS WASTE MANAGEMENT RCRA PART B PERMIT

IEPA 0316000051 -- Cook County USEPA ILD000608471 Clean Harbors Svcs Inc Permit Log No. B-16R-M-16 RCRA -- Part B - Permit File Issue Date: November 4, 2005 Effective Date: December 9, 2005 Expiration Date: December 9, 2016

Modification Effective Date: July 13, 2009

Illinois International Port District 3600 East 95th Street 95th & the Lakefront Chicago, Illinois 60617-5193 Clean Harbors Svcs Inc 11800 South Stony Island Avenue Chicago, Illinois 60617

A Part B permit is hereby approved pursuant to the Resource Conservation and Recovery Act, Illinois Environmental Protection Act, and Title 35 Illinois Administrative Code (I.A.C.) parts 702, 703, 705, and 720 through 729 to Clean Harbors Svcs Inc and the Illinois International Port District (herein known as the Permittee(s)), to construct, maintain and operate a waste management facility involved in the treatment and storage of hazardous waste. The site is located at 11800 South Stony Island Avenue in Chicago, Illinois.

This permit consists of the conditions contained herein (including those in any attachments and appendices) and applicable regulations contained in the Illinois Environmental Protection Act and Title 35 I.A.C. Parts 702, 703, 705 and 720 through 729 in effect on the effective date of this permit. The Environmental Protection Act (Ill. Rev. Stat., Chapter 111 1/2, Section 1039) grants the Illinois Environmental Protection Agency the authority to impose conditions on permits which are issued. This Permit contains 225 pages including Attachments A through I.

If you have any questions regarding this final permit, please contact Mark Schollenberger at

217/524-3307.

Stephen F. Nightingale, P.E. Manager, Permit Section

Bureau of Land

SFN:MAS:bjh\051161s.doc

cc: USEPA Region V

RCRA HAZARDOUS WASTE MANAGEMENT PERMIT CLEAN HARBORS SVCS INC

LPC 000608471

TABLE OF CONTENTS

	<u>ITEM</u>	PAGE(S)
Gen	eral Facility Description	i
	of Plans and Documents Contained e Approved Permit Application	ii
I.	Containers	I-1 - I-20
II.	Tank Systems	ІІ-1 - ІІ-14
III.	Groundwater Monitoring	III-1 - III-13
IV.	Reporting and Notification Requirements	IV-1 - IV-9
V.	Corrective Action	V-1 - V-9
VI.	Standard Conditions	VI-1 - VI-13
VII.	Miscellaneous Units	VII-1 - VII-11
VIII	Special Conditions	VIII-1 – VIII-12
IX.	Air Emission Standards for Equipment Leaks	IX-1 – IX-8
X.	Air Emission Standards for Tanks, Surface Impoundments and Containers	X-1 – X-4

LIST OF ATTACHMENTS

	<u>PAGES</u>
Attachment A - List of Wastes that can be Accepted at this Facility	A-1 - A-40
Attachment B - Inspection Schedule	B-1 - B-10
Attachment C - Construction Certification Form and Instructions	C-1 - C-2
Attachment D - Closure Certification Form	D-1
Attachment E - Approved Permit Section Identification	E-1 - E-23
Attachment F - Financial Assurance Requirements	F-1 - F-3
Attachment G - Groundwater Monitoring Diagram, Log Report, Procedures	
Attachment G.1 - Monitoring Well Construction Diagram	G-1
Attachment G.2 - Field Boring Log	G-2
Attachment G.3 - Well Completion Report	G-3
Attachment G.4 - IEPA Monitor Well Plugging Procedures	G-4
Attachment G.5 – Electronic Groundwater Submittal Forms	G-5 – G-7
Attachment G.6 – RCRA Facility Groundwater, Leachate and Gas Reporting Form (LPC-592)	G-8
Attachment H – Status of Corrective Action at Facility	
Attachment H.1 – Interim Status Closure Effort at the Former CWM Portion of the Facility	H.1-1 – H.1-4
Attachment H.2 – 1994-95 Construction Efforts at the Former	H.2-1 – H.2.3

Attachment H.3 – Corrective Action Efforts at the Original Clean Harbors Facility	H.3-1 – H.3.3
Attachment H.4 – Corrective Action Efforts at the Former CWM Portion of the Facility	H.4-1 – H.4.2
Attachment I - RCRA Corrective Measures Program Requirements	I-1 – I-12

SFN:MAS:bjh\051161s.doc

DESCRIPTION OF THE FACILITY

The Clean Harbors Svcs Inc (CHSI) facility has been a RCRA regulated hazardous waste management facility since 1980. The facility receives containers of wastes in trucks. Bulk liquids are received in both tank truck and rail cars. Its present activities include the storage and treatment of aqueous based waste streams, fuel blending, venting of gas cylinders, treatment of black powder through the addition of water, treatment of containers containing FB5 (high BTU containing) wastes with dry ice, treatment of cyanide wastes in containers, treatment of peroxide wastes in containers, stabilization of wastes in containers, and the storage, consolidation, and transfer of containerized hazardous and nonhazardous wastes, including lab packs. The CHSI facility is located on approximately 56.6 acres in the City Services, Cook County, Illinois, at 11800 South Stony Island Avenue.

Modification Log No. B-16-M-2 to the facility's RCRA permit incorporated the adjacent CWM facility into the CHSI permit. Before it was shut down in 1991, CWM managed RCRA and TSCA (PCBs) wastes in containers, tanks, an incinerator and surface impoundments.

Pre-1980 activities at the CHSI facility included landfilling, injection of wastewaters into a well and neutralization of wastewaters in impoundments. Pre-1980 activities at the CWM facility included landfilling, biological treatment in piles, treatment in surface impoundments, incineration, and storage in tanks and containers.

SFN:MAS:bjh\051161s.doc

List of Plans and Documents Contained in the Approved Permit Applications

Under Illinois solid and hazardous waste regulations, the Permittee(s) has prepared the following formal plans and documents covering various facets of the design, operation and monitoring of hazardous waste management units. The location of each plan or document in the Approved Permit Application is also identified below.

	Plan or Document	Location in the Approved Permit Application
1.	Waste Analysis Plan	Section C-2
2.	Inspection Plan	Section F-2
3.	Contingency Plan	Section G
4.	Closure Plan	Section I
5.	Training Program	Section H
6.	Design Plans and Operating Specifications For Containers	Section D-1, Table D-7
7.	Design Plans and Operating Specifications For Tank Systems	Section D-2, Table D-3 through D-6

SFN:MAS:bjh\051161s.doc

SECTION I: CONTAINER STORAGE

A. Summary

Containers of hazardous waste received at the facility will arrive in a variety of containers but typically in 55 gallon steel or plastic drums, 30 cubic yard roll-off boxes, or tanker trucks. Other containers may be accepted provided they are Department of Transportation ("DOT") approved, in good condition, compatible with the waste they contain and can be safely managed by facility. These containers shall only be stored in the areas designated in Condition I(B)(1).

B. Waste Identification

1. The storage of all hazardous waste containers shall be in the areas identified below:

a. Existing Units - Drums

i. Outside Storage Area (Unit R1)

Bay	Containment Volume	Maximum Number of 55 Gallon Drums Or Equivalents
Staging area	2,500 gallons	160 drums
Flammable Storage #1	4,693 gallons	160 drums
Flammable Storage #2	4,693 gallons	160 drums
Oxidizers Storage #1	2,767 gallons	96 drums
Reactives Storage #1	2,767 gallons	96 drums
Poisons Storage #1 TOTAL	<u>2,767 gallons</u>	96 drums 768 drums (42,240 gallons)

TOTAL

552 drums (30,360 gallons)

		Containment Volume	Maximum Number of 55 Gallon Drums Or Equivalents
ii.	Lab Pack Pour-Off Area (Unit F1)	17,166 gallons	8 drums (440 gallons)
iii.	Drum Storage Area I	Expansion (Unit R2)	
Bay	¥	Containment Volume	Maximum Number of 55 Gallon Drums Or Equivalents
Oxi	idizers Storage #2	2,767 gallons	96 drums
Rea	actives Storage #2	2,767 gallons	96 drums
Po	pisons Storage #2	2,767 gallons	96 drums
Stagin	g (Outbound) 260880 dru		OTAL 368 drums (20,240 gallons)
iv.	Drum Storage Area (Unit G1)	
Bay	Ý.	Containment Volume	Maximum Number of 55 Gallon Drums Or Equivalents
Aci Alk	idic-1 idic-2 taline ging	1,305 gallons 558 gallons 1,084 gallons 860 gallons	192 drums 96 drums 192 drums <u>72 drums</u>

v. Container Storage Building (Unit 25)

			Maximum Number of 55 Gallon
		Containment	Drums
Bay		<u>Volume</u>	Or Equivalents
Alkaline/Poi	sons/PCBs	7,189 gallons	248 drums
Acids		4,322 gallons	136 drums
	Flammable	7,302 gallons	184 drums
Truck Pad		5,447 gallons	88 drums
TOTAL		•	656 drums
			(36,080 gallons)

Non-RCRA hazardous, atmospheric gases may be vented to the atmosphere in this area as described in the application identified as Log No. B-16R, Appendix D-38.

RCRA regulated oxygen may be vented to the atmosphere in Unit 25 as described in the application identified as Log No. B-16R, Appendix D-38. Operations shall cease if the oxygen concentration rises above 23.5%. Operations may continue once the concentration falls below 23.5%. Oxygen shall not be vented when flammable containers are open or in the process of being moved, consolidated or sampled.

The maximum amount of drums that may be in the alkaline bay is limited to 4,015 gallons (73 55-gallon drums) when the lamp crusher is in the unit.

			Maximum Number
			of 55 Gallon
		Containment	Drums
		Volume	Or Equivalents
vi.	Ignitable Container Management Building (Unit 26)	12,415 gallons	192 drums (10,560 gallons)

	vii.	Container Handling Dock (Unit 61)	Containment Volume 8,620 gallons	Maximum Number of 55 Gallon Drums Or Equivalents 160 drums (8,800 gallons)
b.	Exis	sting Units - Bulk Solids		
			Containment Volume	Maximum No. of 30 Cubic Yard Roll-Off Boxes
	i.	Bulk Container Storage Area (Unit Q1)	26,391 gallons	3 Roll-off Boxes (90 cubic yards)
	ii.	Bulk Solids Storage Pad (Unit B)	2,929 gallons per bay	8 Roll-Off Boxes (240 cu. yds.)
c.	<u>Exis</u>	ting Units - Transporter Sto	rage/Staging	
		<u>Unit</u>	Containment Volume	Maximum No. of 7200 Gallon Tank Trucks
	i.	Truck Unloading Area And Bulking Area (Unit Q)	26,391 gallons	3 Trucks (21,600 gallons)
	ii.	Truck Unloading Dock (Unit V)	35,311 gallons	3 trucks
	iii.	Truck Staging Area (Unit C)[2 containment systems]	12,583 gallons each	3 trucks 3 trucks

iv.	Truck Staging Area (Unit 59)	17,185 gallons	3 trucks
v.	Truck Unloading Platform (Unit 15)	13,054 gallons	2 trucks
vi.	Truck Pad (Unit 62)	22,665 gallons	4 trucks
vii.	Rail Car Unloading Area (Unit 13)	33,151 gallons	2 rail cars (60,000 gallons)

d. Proposed Areas - Drums

i. Drum Storage Area Expansion (Unit R2)

	Containment	Maximum Number of 55 Gallon Drums
Bay	<u>Volume</u>	Or Equivalents
Flammable Storage #3	4,693 gallons	160 drums
TOTAL		160 drums (8,800 gallons)

ii. The Lab Pack Repack and Consolidation Area (Unit U)

Bay	Containment Volume	Maximum Number of 55 Gallon Drums Or Equivalents
Acids Storage Area	63 gallons	5 drums
Bases Storage Area	63 gallons	5 drums
Organics Storage Area	63 gallons	5 drums
Oxidizers Storage Area	63 gallons	5 drums
Pesticides Storage Area	63 gallons	5 drums
Organics pour-off area	71 gallons	4 drums

Flammables Storage Area

83 gallons

6 drums

TOTAL

35 drums

(1,925 gallons)

iii. The Paint and Paint Related Processing Area (Building 42)

Maximum Number

of 55 Gallon

Containment

Volume

Drums
Or Equivalents

Westside Pad

Hopper (405)

Building

Bay

776 gallons

24 drums 28 drums

1378 gallons

1 64 cu. ft. hopper Total 52 drums

(2860 gallons) - plus one 64 cu. ft. hopper

iv Shredder Process Building - Unit 24/ Runway Between West Side Pad and Truck Pad - Unit 70

Conveyor to Shredder

5834 gallons (Area 24)

16 drums 1 drum

Drum (412) Tote (407) 548 gallons (Area 70)

1 64 cu. ft. hoper

v. Metal Wash Pad - Unit 68

Drum (434)

5278 gallons

1 drum

e. Proposed Units - Bulk Solids

Maximum Number

30 Cubic Yard

Containment

Roll-Off Drums

<u>Unit</u>

Volume

Or Equivalents

i. Listed Waste Roll-off

(Unit Z1)

14,697 gallons

1 Roll-Off Box (30 cu. yds.)

f. Proposed Units - Transporter Storage/Staging

	<u>Unit</u>	Containment Volume	Maximum Number of 7200 Gallon Trucks
i.	Truck Loading/ Unloading Pad (Unit	6,600 gallons X)	2 trucks
ii.	Truck to Truck Transfer Pad (Unit W	45,708 gallons	4 trucks
iii.	Truck Loading/Unloading P	14,740 gallons ad (Unit 69)	2 trucks

- 2. The Permittee(s) may receive and store containerized hazardous waste identified in Attachment A and/or any nonhazardous waste which has been approved by the Illinois EPA. All waste must be evaluated through the waste analysis plan for compatibility.
- 3. The Permittee(s) is prohibited from storing a hazardous waste that has not been identified in Attachment A.
- 4. The Permittee(s) is prohibited from storing containers of waste in areas other than those specified in Condition I(B)(1) above without the appropriate permit modification in accordance with 35 Ill. Adm. Code 703 Appendix A.
- 5. The Permittee may store one 30 ft. van trailer in each individual bay in Unit B. The Permittee may also store two 20 ft. tandem trailers in Bay 5 and Bay 6 in lieu of a 30 ft. van trailer. No more than 80 55 gallon drums (4400 gallons) shall be placed in each truck.
- 6. Each tanker truck in Unit 69 may be substituted with a roll-off container, van trailer or other transportation vehicle. Containers may also be placed in this unit if the contents will be pumped to the proposed tank farm (Unit 22). The substitute unit may be placed in the unit in lieu of a 7200 gallon truck provided the total gallons does not exceed 7200.

C. Condition of Containers

1. If a container holding waste is not in good condition (e.g., severe rusting, apparent structural defect, etc.) or if it begins to leak (this includes waste which appears on the outside of the drum/box but has not spread to the containment base or other containers), the

Permittee(s) must immediately transfer the waste from this container to a container that is in good condition or manage the waste in accordance with the Approved Permit Application.

- 2. Any transfer of waste which was required to comply with I(C)(1), must be recorded in a separate log and maintained as part of the facilities operating record.
- 3. Packaging of all wastes accepted for storage in the container storage area shall meet the requirements of 49 CFR 172, 178 and 179 and all applicable D.O.T. and N.F.P.A. regulations. All containers must be marked and labeled in accordance with 49 CFR 172.
- 4. The contents of each container shall be clearly identified on the side of the container in accordance with 49 CFR 172 prior to being placed in the container storage area.

D. Compatibility of Waste With Containers

The Permittee(s) must use a container made of or lined with material which will not react with and is otherwise compatible with the waste to be stored so that the ability of the container to contain the waste is not impaired.

E. Management of Containers

The Permittee(s) shall comply with the following management practices:

- 1. A container holding waste must always be closed during storage, except when it is necessary to add or remove or sample waste.
- 2. A container holding waste must not be opened, handled, or stored in a manner that may rupture the container or cause it to leak.
- 3. All aisles between each row of pallets and between pallets and a wall in a pile must be a minimum of two feet wide. This is necessary to provide adequate access for the inspection of each container.
- 4. Containers may be stacked provided that:
 - a. Only the same size or smaller containers are stacked on top of the containers beneath.

- b. 55-gallon or larger containers are separated by a pallet or other dunnage to provide stability.
- c. A pallet for stability for smaller size containers shall be used when the height of the stack exceeds 42 inches unless the containers are shrink wrapped. 55-gallon or larger containers may be stacked 2-high with a pallet under each container. Smaller containers may be stacked as long as the height of the stack does not exceed the height of two 55 gallon containers on pallets (i.e. 84 inches).
- d. 55-gallon or larger containers may not be stacked in the flammable storage areas. Smaller containers may be stacked so long as the height of the stack does not exceed the height of one 55-gallon drum on a pallet (i.e. 42 inches).
- 5. The containers shall be clearly marked with the date received prior to being placed into storage.
- 6. Containers shall be positioned such that the markings and labels are readable during inspections.
- 7. The following management practices apply to arrangements of containers that contain one or more containers of flammable or combustible liquids as defined in NFPA 30.
 - a. Each arrangement of containers (pile) as defined below shall be separated from other arrangements by a five foot aisle. The maximum volume of containers in each arrangement shall not exceed the following:
 - i. 1,100 gallons for arrangements with one or more containers of waste which have a flash point below 73°F and a boiling point below 100°F.
 - ii. 2,200 gallons for arrangements with one or more containers of waste having a flash point below 73°F and a boiling point above 100°F.
 - iii. 4,400 gallons for arrangements with one or more containers of waste having a flash point at or above 73°F and below 100°F.
 - iv. 8,800 gallons for arrangements with one or more containers of waste having a flash point at or above 100°F and below 140°F.
 - v. 22,000 gallons for arrangements which do not contain one or more containers of waste having a flash point below 140°F.

- b. An aisle that is a minimum of two feet wide must be maintained within the arrangement between each row of pallets and between pallets and a wall in a pile. This is necessary to provide adequate access for the inspection of each container.
- The permittee shall not stack drums higher than the height of a 55-gallon drum (3 ft.) in the following areas: Building 61, Building 26, Building U, Building 42 including the West Side Pad and Unit 24.
- 9. The permittee may only store bulk solids in Building 26 if the bottom dimensions of the DOT approved bulk container (ie. box, tote tank, flex bin, etc.) do not exceed 4 feet by 4 feet. The arrangement of pallets or bulk containers in Building 26 shall comply with drawing 4210 sheet 2 of 3. Tote tanks shall not be stacked. The permittee is prohibited from staging or storing roll off boxes in Building 26.

F. Inspection

The Permittee(s) shall inspect the container storage area in accordance with the inspection schedule specified in Attachment B to this Permit and Section F of the approved permit application. The inspection must be adequate to detect leaks and deterioration of containers and the containment system caused by corrosion or other factors. The procedures described in the approved permit application must be used with the following modifications:

- Action shall be taken to immediately overpack a leaking or deteriorating drum or to transfer the waste to a container in good condition. Appropriate action to clean up any release of waste from a leaking or deteriorated drum shall be carried out immediately after the drum has been overpacked or the waste transferred to a container in good condition.
- 2. If a portion of the containment system is found to be in a deteriorated condition (cracks, gaps, spalling, failure of the coating, etc.) the Permittee(s) shall immediately remove all waste containers from the deteriorated area until the containment system has been repaired.
- 3. The container storage, staging and loading/unloading areas shall be inspected daily for spills and releases. If spills and releases are observed, such releases shall immediately be remediated in accordance with all applicable regulations and special conditions found herein. Results of this inspection and a description of the corrective action taken, if necessary, shall be documented in the inspection log.
- 4. The inspection shall include checking aisle space, height of stacks, proper labeling and marking of containers, and remaining capacity.

5. Results of all inspections and the activities undertaken to correct deficiencies shall be documented in the operating record for the facility.

G. Containment

The Permittee(s) shall construct, operate and maintain the containment system according to the design plans and operating specifications contained in the Approved Permit Application, subject to the following modifications.

- 1. Clean Harbors shall perform a complete inspection of the surface coating yearly and perform annual maintenance to insure the integrity of the coating. Clean Harbors shall document the date of the surface coating inspection and any maintenance of the surface coating. These inspections must be performed no later than August 31, of each year.
- 2. It shall not be an act of non-compliance if the coating has been installed properly but does not live up to the manufacturer's printed performance standards and fails due to excessive wear or chemical breakdown. The Permittee(s) shall notify the Illinois EPA within thirty days of becoming aware of the failure. The Permittee(s) shall reapply a different coating specified in the approved permit application or submit a modification of its permit to install a new coating within 180 days of the failure of the coating.

H. Special Requirements for Ignitable or Reactive Waste

- 1. a. The Permittee(s) shall not locate containers which hold ignitable or reactive waste within 50 feet of the facility's property line.
 - b. Tank trucks containing ignitable liquids shall not be placed in Unit C.
- 2. The Permittee(s) shall take precautions to prevent accidental ignition or reaction of ignitable waste.
- 3. Ignitable wastes must be separated and protected from sources of ignition or reaction including but not limited to:
 - a. Open flames, smoking, cutting and welding, hot surfaces, frictional heat, sparks (e.g., static, electrical, or mechanical), spontaneous ignition (e.g., from heat producing chemical reactions), and radiant heat.

- b. While ignitable waste is being handled, the Permittee(s) must confine smoking and open flame to specially designated locations.
- c. "No Smoking" signs must be conspicuously placed wherever there is a hazard from ignitable waste.
- 4. The following are allowed to be utilized for the container storage of flammable and combustible materials as defined by NFPA: Section VIII, Unit Storage Areas 61, Unit 26, Unit 25, Units R1/R2, Unit U, Unit 42, Unit 24/Unit 70, Unit 59, Unit 62, Unit 69, Unit B, Unit C, Unit Q, Unit V, Unit 13, Unit 15 and Unit W.

I. Special Requirements for Incompatible Waste

1. The Permittee(s) shall not store containers holding a material that is incompatible with any waste or other materials stored nearby, unless separated from other waste/materials or protected from them by means of a dike, berm or other devices. Incompatible materials are defined in Section VIII.(A)(4) to this permit.

J. General Operating Requirements

The Permittee(s) shall operate the container storage areas identified in Section B in accordance with the approved permit application, subject to the following modifications:

- 1. The Permittee(s) may receive hazardous waste for storage in containers provided the following requirements are met.
 - a. The material must be a waste which has been identified in Attachment A to this permit.
 - b. The waste must be analyzed in accordance with all applicable regulations, the approved waste analysis plan, and Conditions A.1 through A.8 in Section VIII of this Permit.
 - c. The waste must be accompanied by a properly completed Illinois manifest.
- 2. Cleanup of all spills inside the secondary containment areas must begin immediately upon discovery and be completed within 24 hours. Secondary containment must be inspected immediately after cleanup for cracks, gaps or other defects (failure of the coating) which would allow waste to migrate to the underlying soil. If any deterioration is discovered, the permittee shall immediately remove all waste from the

> deteriorated area. All cleanup operations shall be documented in the facility's operating record.

- 3. The Permittee(s) shall remove any precipitation which accumulates in the secondary containment system within 24 hours of the time such accumulation is discovered, or before the area overflows, whichever comes first.
- All hazardous and nonhazardous special wastes stored or generated by this facility which require further treatment or disposal off-site must be transported to the receiving facility in accordance with the applicable regulations in 35 Ill. Adm. Code Parts 709, 702, 723, 307 and 309, and the Illinois EPA's Manifest System.
- Shipments of containers from off-site that are held in a truck for more than ten (10) days must be stored in accordance with the conditions of this permit (eg. they must meet the same aisle space and compatibility requirements as the other container storage units). Trucks loaded within ten days are only subject to the requirements of condition I.J.9 below when containers of waste are present in the truck.
- 6. The arrangement of the containers in a truck that is in storage at the site must meet the aisle space requirements of 35 IAC 724.135 and those specified in Sections I.E.3 and I.E.7 of this permit.
- 7. Lab packs shall not be opened, repackaged, poured-off or consolidated in the storage bays or staging areas except as specified below.

The consolidation of lab packs can only occur under operating fume hoods in the following areas:

the three fume hoods along the west wall in Building 25,

the fume hood in the northeast corner of Building 26,

the four fume hoods in the Lab Pack Repack and Consolidation Area in Unit U,

the fume hood in the staging area in Unit G1, and

the fume hoods in the staging area in Unit R1.

The pouring-off of the containers that were in a lab pack can only occur under operating fume hoods in the following areas:

the fume hood in the drum pumping enclosure along the north wall in Building 26,

the fume hood at the Lab Pack Pour-Off Station in Unit F1, and

the four fume hoods in Building #25.

- 8. Wastes which are considered incompatible under US Department of Transportation (DOT) segregation requirements at 49 CFR Parts 171 179 shall not be managed in a container unloading dock at the same time.
- 9. a. Containers that are held in a truck for less than 10 days in area that has a common secondary containment system or drains to a single sump shall meet the DOT segregation and compatibility requirements at 49 CFR Parts 171 179. This condition applies to both the containers of wastes on a truck from either on-site or off-site as well as the area in which the trucks are parked.
 - b. Containers that are held in a truck for greater than 10 days in area that has a common secondary containment system or drains to a single sump must be stored pursuant to Condition J.5 and shall meet the compatibility requirements of Condition A.4 in Section VIII. This condition applies to both the containers of wastes on a truck from either on-site or off-site as well as the area in which the trucks are parked.
 - c. Vehicles (e.g., tank trucks or roll-of boxes) of bulk liquid, solid or sludge wastes that are parked in area that has a common secondary containment system or drains to a single sump shall meet the compatibility requirements of Condition A.4 in Section VIII, regardless of whether they are in storage as defined in Condition J.5 above.
- 10. The permittee shall inspect the containers from the Pegasus System according to the following schedule to insure that containers are RCRA empty before they are crushed. The permittee shall not crush containers that are not RCRA empty.

The inspections shall be performed prior to the containers being crushed. If the Pegasus System fails an inspection, the permittee shall not crush containers in the Pegasus System until the source of the problem(s) is investigated and the problem(s) resolved.

Inspection Schedule for containers to be crushed in the Pegasus System:

Phase 1. Visually inspect 10 drums in a row, once per operating day, for four (4) consecutive weeks. If successful without exception (i.e., all drums are "RCRA empty" and/or all "non-RCRA empty" drums are automatically rejected by the system), the permittee shall follow the procedures in Phase 2. If unsuccessful, the permittee shall continue to follow the procedures in Phase 1 until successful.

<u>Phase 2</u>. Visually inspect 10 drums in a row, once per week, for four (4) consecutive weeks. If successful without exception (i.e., all drums are "RCRA empty" and/or all "non-RCRA empty" drums are automatically rejected by the system), the permittee shall use the procedures in Phase 3. If unsuccessful, the permittee shall use the procedures in Phase 1.

<u>Phase 3</u>. Visually inspect 10 drums in a row, once per week, for two (2) consecutive weeks. If successful without exception (i.e., all drums are "RCRA empty" and/or all "non-RCRA empty" drums are automatically rejected by the system), the permittee shall use the procedures in Phase 4. If unsuccessful, the permittee shall use the procedures in Phase 2.

<u>Phase 4</u>. Visually inspect 10 drums in a row, once per month. If successful without exception (i.e., all drums are "RCRA empty" and/or all "non-RCRA empty" drums are automatically rejected by the system), continue with monthly inspection schedule. If unsuccessful, the permittee shall use the procedures in Phase 3.

- 11. Hazardous waste transfer facility activities are limited to the areas identified on CHSI Drawing 4254, Revision A. The use of other areas as discussed in Note No. 4 on the drawing is limited to in-transit RCRA hazardous wastes only (eg. the transportation of wastes to a facility other than the Clean Harbors Svcs Inc facility). In-transit activities involving non-RCRA wastes is not permitted unless the permittee requests and is issued a solid waste transfer facility permit pursuant to 35 IAC 807 requirements.
- 12. The mobile waste compactor shall only be used in the staging area of unit R1.
- 13. The permittee may only treat Furning Acids under the operating furne hood in the Outdoor Staging Area (Unit R1).
- 14. The treatment of cyanide wastes in containers shall only be conducted under the operating fume hood in the Outdoor Storage Area (Unit R1). The exhaust from the fume hood shall be bubbled through a 55 gallon drum containing a caustic solution as outlined in the approved permit application. Treatment of cyanide wastes in tank trucks shall be in accordance with the approved application as outlined on page D-15.

- 15. The treatment of peroxides in containers shall only be conducted under the operating fume hood in the Unit G1 or Unit F1. The exhaust from the fume hood shall be fed through a carbon absorption unit.
- 16. Phase separation of two or more liquid layers, as outlined in the application, is not permitted as a container management activity. The contents of a container may be pumped into the tank system for phase separation.
- 17. Stabilization of wastes in containers (e.g., a roll-off box) may be conducted in Process Building No. 3 (Unit Z). This is the only area currently permitted for this activity.
- 18. The permittee is prohibited from rinsing Non-bulk containers (e.g., drums) that contained acutely toxic wastes (P-codes).
- 19. The removal of residues from non RCRA-empty tank trucks shall only occur in the following transporter storage/staging units as identified in Section I.B.1 of this permit: Q, V, X, C, 59, 15, 62, and W. The removal of residues from trucks during off-loading into the RCRA-exempt Clean Water Act waste water treatment system in Units J1 and J2 are not subject to this condition.
- 20. The placement of dry ice into roll-off/intermodel containers of wastes to lower temperatures (to prevent spontaneous combustion) shall be conducted in Units B and Q1 in accordance with Appendix D 61 of the approved renewal application subject to the following modifications:
 - a. The requirement to add dry ice to containers applies only to those containers with waste identified by the permittee as FB5. That is, those solids that contain at least 5000 BTUs/lb but are not processable in the existing fuel blending system because they are either non-dispensable monolithic solids or contain non-processable debris. The dry ice must be added when:
 - 1. The expected high daytime temperature is at or above 90 degree Fahrenheit;
 - 2. The expected low nighttime temperature is at or above 70 degrees Fahrenheit; and
 - 3. The expected high dew point is at or above 70 degrees Fahrenheit.
 - b. When dry ice is required by 20(a) above, the permittee shall visually inspect containers daily to ensure that there is at least 25 lbs. of dry ice present.

- c. The permittee shall monitor the temperature inside the containers required by 20(a) above to contain dry ice. If the temperature is above 150 degrees Fahrenheit within the container, additional dry ice shall be added to reduce the temperature below this level even if 25 lbs. or dry ice is present in the container.
- 21. The wetting of black powder in containers to prevent explosions prior to transportation may be conducted in area R1 only, and shall comply with the procedures in Appendix D 62 of the approved renewal permit application as modified below:
 - a. The permittee shall wet all black powder received at this facility with an amount of water equal to 20% by weight of the black powder.
 - b. Where black powder is being treated as described above, a polyethylene cover must be placed under the container to collect spillage.
 - c. The cover shall be decontaminated after treatment is complete and disposed of as special waste.
 - d. The permittee is allowed to add virgin ethylene glycol based antifreeze to the water used to wet the black powder when outdoor temperatures are expected to go below 32 degrees Fahrenheit.
- 22. All containers managed in the designated bulk solids storage areas (e.g., Unit Q1 and Unit Z1) shall be tested for the presence of free liquids using EPA Method 9095 (Paint Filter Liquids Test) as described in Test Methods for Evaluating Solid Wastes, Physical/Chemical Methods (SW-846). No wastes containing free liquids shall be stored in these areas.

K. General Construction Requirements

- 1. The Permittee(s) is authorized to construct the proposed Container Management Units identified in Sections I.B.1.d., I.B.1,e. and I.B.1.f. of this permit. The container storage areas may only be constructed in accordance with the approved Permit Application, subject to the following modifications:
 - a. Within thirty days after completing construction and prior to any container of waste being placed or stored in the container storage areas, the Permittee(s) shall submit to the Illinois EPA a Construction Certification Report from a qualified, registered professional engineer, demonstrating that the container storage area meets the requirements of 35 Ill. Adm. Code 724.275(b). This report shall

contain the information required in Attachment C to this permit and a statement that the base slab is free of cracks or gaps.

b. The Permittee(s) may not store wastes in these areas until the Construction Certification Report is approved.

L. Closure

At closure, all waste and waste residues must be removed from the containment system. Remaining containers, liners, bases, and soil containing or contaminated with waste or waste residue must be decontaminated or removed. Closure of the container storage areas shall be carried out in accordance with the closure plan in the approved renewal Permit Application, as modified below:

- 1. The Permittee(s) shall notify the Illinois EPA's Bureau of Land in writing of its intent to close the container storage areas at least 45 days prior to the date closure is expected to begin. Along with this notification, the Permittee(s) shall submit the sampling and analysis plan to be used in demonstrating a storage area has been properly decontaminated. Closure shall not begin without written approval from the Illinois EPA's Bureau of Land. Illinois EPA review of this plan will be subject to the permit appeal provisions contained in Section 39(a) and Section 40(a) of the Act. The response from the Illinois EPA shall approve and establish:
 - a. The sampling plan;
 - b. What contaminants must be analyzed for; and
 - c. The level at which decontamination is considered complete.
- 2. The concrete surfaces shall be visually inspected, photographed and any residue adhering to the surface must be removed by scraping and/or brushing. Following this, the concrete surfaces must be steam cleaned and triple rinsed. All wash and rinse water shall be collected and managed as a hazardous waste, unless the Permittee(s) can document that the waste is not hazardous as defined in 35 Ill. Adm. Code 721.103. An independent, registered, professional engineer must certify that the surface has no cracks, gaps or other defects which would allow waste to migrate through to the underlying soil. Otherwise, sampling in accordance with an approved sampling plan, shall be conducted to verify the underlying soil is uncontaminated.
- 3. Sweepings, washwaters and rinsates collected during closure of the container storage area shall be managed as a hazardous waste, unless the Permittee(s) can document that the waste is not hazardous as defined in 35 Ill. Adm. Code 721.103.

- 4. The Permittee(s) shall provide post-closure care in accordance with 35 Ill. Adm. Code Part 724, Subpart G for the container storage areas in the event all of the hazardous wastes or contaminated soils cannot be practicably removed or decontaminated in accordance with the approved closure plan identified in Condition I(L)(1). If it is determined that the closure requirements cannot be met and post-closure care is required, this Permit must be modified to require post-closure care for the container storage areas, in accordance with 35 Ill. Adm. Code Subtitle G, Part 724, Subparts G and H.
- 5. Should post-closure care, as described in Condition I(L)(4) above, become necessary, the Permittee(s) shall submit an application for modification to this permit, including an amended closure and post-closure care plan for this unit. The application must be submitted within thirty (30) days following discovery that clean closure cannot be accomplished. If a determination is made to not pursue clean closure prior to the implementation of the closure plan for the container storage area, the modification request shall be made no later than sixty (60) days after the determination is made.
- 6. Financial assurance for closure and post-closure of the container storage areas, if required in accordance with Condition I(L)(4) and I(L)(5) above, shall be provided within thirty (30) days following modification of the permit.
- 7. Within sixty (60) days after closure of the container storage areas has been completed, the Permittee(s) shall submit certification to the Illinois EPA that the unit has been closed in accordance with the approved closure plan. The closure certification form in Attachment E to this permit or a certification with identical wording must be used. Signatures must meet the requirements of 35 Ill. Adm. Code Section 702.126. The independent engineer (registered in the State of Illinois) should be present at all critical, major points (activities) during the closure. These might include soil sampling, soil removal, backfilling, final cover placement, etc. The frequency of inspections by the independent engineer must be sufficient to determine the adequacy of each critical activity. Financial assurance must be maintained for the area(s) until the Illinois EPA approves the closure certification for the unit. The Illinois EPA's review of closure certification for partial or final closure will be conducted in accordance with 35 Ill. Adm. Code 724.243.

A Closure Documentation Report must be submitted with the closure certification which includes the following items, if applicable:

- a. The volume of waste and waste residue removed, including wastes resulting from decontamination activities;
- b. A description of the method of waste handling and transport;

- c. Copies of the waste manifests;
- d. A description of the sampling and analytical methods used including sample preservation methods and chain-of-custody information;
- e. A chronological summary of closure activities and the cost involved;
- f. Tests performed, methods and results;
- g. Color photographs of closure activities which document conditions before, during and after closure; and
- h. A scale drawing of all excavated or decontaminated areas and sample locations.
- 8. To avoid creating another regulated storage unit during closure, it is recommended that you obtain any necessary permits for waste disposal prior to initiating excavation activities. If it is necessary to store excavated hazardous waste on-site prior to off-site disposal, do so only in containers or tanks for less than ninety (90) days. Do not create regulated waste pile units by storing the excavated hazardous waste in piles. The permit exemption (35 Ill. Adm. Code 722.134) only applies to containers and tanks.
- 9. Under the provisions of 29 CFR 1910 (51 FR 15,654, December 19, 1986), cleanup operations must meet the applicable requirements of OSHA's Hazardous Waste Operations and Emergency Response standard. These requirements include hazard communication, medical surveillance, health and safety programs, air monitoring, decontamination and training. General site workers engaged in activities that expose or potentially expose them to hazardous substances must receive a minimum of 40 hours of safety and health training off site plus a minimum of three days of actual field experience under the direct supervision of a trained experienced supervisor. Managers and supervisors at the cleanup site must have at least an additional eight hours of specialized training on managing hazardous waste operations.
- 10. If the Illinois EPA determines that implementation of this closure plan fails to satisfy the requirements of 35 Ill. Adm. Code, Section 724.211, the Illinois EPA reserves the right to amend the closure plan. Revisions of closure plans are subject to the appeal provisions of Section 40 of the Act.
- 11. The Permittee shall analyze all samples individually (i.e., no compositing). Sampling and analytical procedures shall be conducted in accordance with the latest edition of SW-846 and Attachment G to the Illinois EPA's closure plan instruction package. Sample size per interval shall be minimized to prevent dilution of any contamination. Apparent visually contaminated material within a sampling interval shall be included in the sample portion of the interval to be analyzed. To demonstrate a parameter is not

present in a sample, analysis results must show a detection limit at least as low as the PQL for that parameter as identified in the latest edition of SW-846.

SFN:WRW:bjh\051161s.doc

SECTION II: TANK SYSTEMS

A. Summary

The tanks at the Clean Harbors Svcs Inc facility are used for a variety of purposes, including wastewater treatment units (pursuant to 35 Ill. Adm. Code 310), and hazardous waste storage and treatment units (pursuant to 35 Ill. Adm. Code 724). Of these uses, the storage and treatment of hazardous waste are the only uses that are regulated under RCRA. Associated with these activities are twenty seven proposed above-ground tanks. All above-ground tanks will have secondary containment consisting of a concrete vault and an impermeable membrane or coating which has been applied to the concrete.

B. Waste Identification

- 1. The Permittee(s) may store a total volume (in gallons) of waste in the tanks listed below subject to the terms of this permit.
 - i. Listed Waste Storage Tanks (Unit Y) Proposed

Tank Numbers	No. of <u>Units</u>	<u>Description</u>	Maximum Capacity <u>In Gallons</u>	Minimum Shell Thickness of Tank (inches)	Material of Construction
121	(6)	Storage Tanks	11025	3/16	Carbon Steel
155	(2)	Storage Tanks	11025	3/16	Carbon Steel

ii. Listed Waste Treatment Tanks (Unit Z) Proposed

Tank <u>Numbers</u>	No. of <u>Units</u>	<u>Description</u>	Maximum Capacity <u>In Gallons</u>	Minimum Shell Thickness of Tank (inches)	Material of Construction
123	(1)	Reactor vessel	13,570	1/4	FRP
137	(1)	Lamella clarifier	1,200	1/4	Carbon Steel
138	(1)	Clarifier Waste Collection Tank	4,100	3/16	Carbon Steel

142	(1)	Sludge Conditioning Tank	1,270	3/16	Carbon Steel
149	(2)	Sand Filter	750	3/32	Carbon Steel
150	(1)	Backwash Collection Tank	3,770	3/16	Carbon Steel
152	(2)	Carbon Adsorption Unit	1,300	3/16	Carbon Steel
153	(1)	Treated Effluent Tank	2,640	3/16	Carbon Steel

iii. Hazardous Waste Fuel Blending Operation (Unit 43) Existing

Tank Numbers	No. of <u>Units</u>	<u>Description</u>	Maximum Capacity In Gallons	Minimum Shell Thickness of Tank (inches)	Material of Construction
161-21	(1)	Dispersion Tank	1,225	3/16	Carbon Steel
161-22	(1)	Overflow Tank	275	3/16	Carbon Steel

iv. Flammable Storage Tank Farm (Unit 16) Existing

Tank <u>Numbers</u>	No. of <u>Units</u>	<u>Description</u>	Maximum Capacity <u>In Gallons</u>	Minimum Shel Thickness of Tank (inches)	l Material of <u>Construction</u>
. 158	(5)	Tanks TK-103, TK-104, TK-105, TK-106, TK-108. Hazardous Waste Fuel Storage Tanks	12,800	0.167	Carbon Steel
159	(1)	Tank TK-112. Neutral pH waters, lean waters and/or hazardous waste fuel storage tank.	19,600	0.167	Carbon Steel

177	(2)	Tanks TK-101 and TK-107. Mild acidic waters, lean waters, and/or hazardous waste fuel storage tanks.	12,800	0.158	Stainless Steel
180	(1)	Tank TK-102. Hazardous Waste Fuel and PCB Storage Tank.	12,800	0.167	Carbon Steel
183	(1)	Tank TK-110. Hazardous Waste Fuel and PCB Storage Tank.	12,800	0.167	Carbon Steel

v. Flammable Storage Tank Farm (Unit 22) Proposed

Tank Numbers	No. of <u>Units</u>	<u>Description</u>	Maximum Capacity In Gallons	Minimum Shell Thickness of Tank (inches)	Material of Construction
414	(1)	Hydropulpar	3490	0.05	carbon steel
415, 416	(2)	Blended Liquid Storage Tank	10,558	0.105	carbon steel
417	(1)	Diluent Feed Tank	15,547	0.167	carbon steel
418	(1)	Metalwash Solvent Storage Tank	6,136	0.054	carbon steel
424	(1)	Metal Wash Tank	3730	0.5	carbon steel
427	(1)	Rinse Tank	987	0.5	carbon steel

- 2. The Permittee(s) may store the wastes identified in Attachment A to this permit in the tanks specified above and any nonhazardous waste. All nonhazardous waste must be evaluated through the waste analysis plan for compatibility.
- 3. Storage of hazardous waste in tanks other than those specifically identified in II(B)(1) is prohibited.

C. Containment and Detection of Releases

- 1. The Permittee(s) shall provide secondary containment which meets the requirements of 35 Ill. Adm. Code 724.293 (as amended 7/16/87) for each tank identified above.
- 2. The Permittee(s) shall construct, operate, and maintain the tank system according to the detailed plans and reports contained in the approved permit application.

- 3. The Permittee shall perform a complete inspection of each secondary containment coating system yearly and perform annual maintenance to insure the integrity of the coating. It shall not be an act of non-compliance if the coating has been installed properly but does not live up to the manufacturer's printed performance standards and fails due to excessive wear or chemical breakdown. The Permittee(s) shall notify the Illinois EPA within thirty days of becoming aware of the failure. The Permittee(s) shall reapply a different coating specified in the approved permit application or submit a modification of its permit to install a new coating within 180 days of the failure of the coating. The Permittee shall document the date of the surface coating inspection and any maintenance of the surface coating. These inspections must be performed no later than August 31, of each year.
- 4. The Permittee(s) shall inspect all secondary containment sumps daily and remove all liquids contained in the sumps within 24 hours.

D. General Construction Requirements

- 1. The Permittee(s) are authorized to construct the listed waste storage tanks (Unit Y), the listed waste treatment tanks (Unit Z), and the flammable storage tank farm (Unit 22) as identified in Condition II(B)(1). Each unit includes all tanks, ancillary equipment and secondary containment. These tank farms may only be constructed in accordance with the approved permit application, subject to the following modifications:
 - a. Within thirty days after completing construction and prior to any waste being placed or stored in a tank or its corresponding ancillary equipment, the Permittee(s) shall submit to the Illinois EPA's Bureau of Land, a Construction Certification Report from an independent qualified, registered professional engineer. The certification must demonstrate that the tank system meets the requirements of 35 Ill. Adm. Codes 724.292 and 724.293. The certification shall contain the information described in Attachment C and the additional information listed below:
 - i. Documentation that the new tank systems were inspected for the presence of the following items:
 - a) weld breaks;
 - b) punctures;

- c) scrapes of the protective coatings on the tank or secondary containment system;
- d) cracks;
- e) corrosion;
- f) other structural damage or inadequate construction/installation; and
- g) cracks or gaps in the base slab.

All defects noted during this inspection must be remedied prior to covering, enclosing or placing the tank system in use.

- ii. A copy of the leak test performed on all of the new tanks and ancillary equipment, including a description of any repairs performed on the system to remedy the leak(s).
- iii. Certification that the tanks and ancillary equipment were designed and installed in a manner that is supported and protected against physical damage and excessive stress due to settlement, vibration, expansion or contraction.
- b. All tanks, pumps, piping, hoses, and manifolds used for PCBs wastes regulated under TSCA shall be physically separate from those tanks which only handle RCRA regulated wastes.
- c. The Permittee(s) shall not store wastes in these areas until the Construction Certification Report is approved. The Agency shall review the Report described above to ensure the tank systems and their secondary containment meets the requirements of 35 Ill. Adm. Codes 724.292 and 724.293.

E. General Operating Requirements

1. The Permittee(s) shall not place hazardous wastes in a tank system if they could cause the tank, its ancillary equipment, or the containment system to rupture, leak, corrode, or otherwise fail.

- 2. The Permittee(s) shall use appropriate controls and practices to prevent spills and overflows from tank or containment systems using the methods specified in the Approved Permit Application.
- 3. In the event of a leak or a spill in the tank system, the Permittee(s) shall comply with the practices and procedures described in the approved permit application and notify the Agency's Bureau of Land in according with Condition II(I)(1). All reported leaks or spills must be recorded in the Facility's Operating Record.
- 4. All hazardous wastes to be received at the tank storage area must be identified in Attachment A to this permit and have been analyzed per all applicable regulations and the requirements identified in the waste analysis plan. In addition, all hazardous and nonhazardous special wastes received at the facility must be accompanied by a properly completed Illinois manifest.
- 5. An employee of the facility shall be present and observe the transfer operation at all times when waste is being transferred between containers, tank trucks, rail cars and tanks.
- 6. Precipitation accumulating within the tank farm shall be removed within 24 hours after the precipitation event has ended.
- 7. Incoming waste, not subject to 35 Ill. Adm. Code 723.112 (e.g., CHSI at Chicago is the designated facility) must be placed in a permitted storage unit within 24 hours upon receipt of the waste.

F. Tank System Certification

- 1. The Permittee(s) shall obtain and keep on file at the facility written statements by those persons required to certify the design of the tank system and supervise the installation of the tank system as required by 35 Ill. Adm. Code 724.292(g).
- 2. The Permittee(s) shall obtain and keep on file at the facility a written assessment of the new tank system's integrity (35 Ill. Adm. Code 724.292(a)). The assessment shall be certified by an independent, qualified Illinois registered professional engineer.

G. Response to Leaks or Spills

In the event of a leak or a spill from a tank system, from a secondary containment system, or if a system becomes unfit (i.e., failure of the coating) for continued use, the Permittee(s) shall remove the system from service immediately and complete the following actions: (35 Ill. Adm. Code 724.296(a)-(f)).

- 1. Stop the flow of hazardous waste into the system and inspect the system to determine the cause of the release.
- 2. Remove all waste as necessary from the system within 24 hours of the detection of the leak to prevent further release and to allow inspection and repair of the system. If the Permittee(s) finds that it will be impossible to meet this time period, the Permittee(s) shall notify the Agency and demonstrate that the longer time period is required.
 - If the collected material is a RCRA hazardous waste, it must be managed in accordance with all applicable requirements of 35 Ill. Adm. Code Parts 722-724.
- 3. Contain visible releases to the environment. The Permittee(s) shall immediately conduct a visual inspection of all releases to the environment and based on that inspection: (1) prevent further migration of the leak of spill to soils or surface water and (2) remove and properly dispose of any visible contamination of the soil or surface water.
- 4. Close the system in accordance with the Closure Plan, contained in the approved Permit Application, unless the following actions are taken:
 - a. For a release caused by a spill that has not damaged the integrity of the system, the Permittee(s) shall remove the released waste and make any necessary repairs to fully restore the integrity of the system before returning the tank system to the service.
 - b. For a release caused by a leak from the primary tank system to the secondary containment system, the Permittee(s) shall repair the primary system prior to returning it to service.

H. Inspections

- 1. The permittee shall inspect the tank systems in accordance with the inspection schedule in Attachment B to this Permit and Section F of the approved permit.
- 2. If a leak or spill is observed during the daily inspections, the Permittee(s) shall immediately remove the tank system in question from service and follow the procedures set forth in 35 Ill. Adm. Code 724.296.
- 3. Precipitation accumulating in the sumps of the secondary containment system at the loading dock shall be removed within 24 hours after the precipitation event has ended.
- 4. Releases of hazardous waste from spills and leaks which are observed in the secondary containment system shall also be removed within 24 hours and managed as a hazardous waste.
- 5. The bulk liquid unloading area shall be inspected in the following manner:
 - a. The area shall be inspected for the presence of spills and releases after each truck has been unloaded. If observed, such releases shall be cleaned up immediately.
 - b. Documentation of these inspections and any corrective actions taken shall be included in the operating record for the facility.
- 6. The Permittee(s) shall inspect each tank system to assess its condition. This inspection shall consist of a visual inspection, a pressure test and an ultrasonic thickness test in accordance with the following procedures:
 - a. An ultrasonic thickness test of the tops, bottoms and sidewalls of the tank in accordance with the procedures in Appendix F-9 of the application shall be conducted annually on each tank. The ultrasound tests shall be conducted from the inside of the tank at least every fifth year concurrent with the internal inspection required in Condition H.6.c below. Corrective action as specified by the manufacturer of these tanks shall be taken if the test indicates that the materials of construction of a tank system have been detrimentally affected by the hazardous wastes which have been stored in it.
 - b. A hydrostatic leak test or other integrity assessment as approved by the Agency shall be conducted annually on the tank ancillary equipment. Corrective action as specified by the manufacturer of the ancillary equipment shall be taken if the

test indicates that the ancillary equipment has been detrimentally affected by the hazardous wastes which have been in it.

- c. A detailed visual inspection of the tank's interior shall be conducted at least every fifth year to ensure the tank's integrity. During this internal inspection, the internal surface shall be inspected for rust, cracks and thin areas. Corrective action as specified by a qualified registered professional engineer or corrosion technician shall be taken if the internal inspection indicates that the interior surface of a tank system has been detrimentally affected by the hazardous waste stored in it.
- d. If the testing conducted as required by Conditions II(H)(6)(a) or (c) above indicates the present rate of corrosion may cause reduction of the shell thickness below the permitted minimum shell thickness within 5 years, internal inspections shall be conducted annually and corrosion monitoring coupons must be installed in the area where the most severe corrosion is occurring. The coupons shall be monitored every 60 days. If the coupon indicates the tank will fail in less than one year, the permittee shall verify the remaining shell thickness through ultrasonic testing or remove the tank from service. The tank shall be removed from service and repaired or replaced when the tank no longer meets the minimum shell thickness requirements specified in Condition II.B.
- e. For all FRP Tanks; a detailed visual inspection of the tank's interior shall be conducted on an annual basis to ensure the tank's integrity. During this internal inspection, the interior surface shall be inspected for softening, indentations, cracks, exposed fibers, aging, checking, lack of surface resins, delamination, translucency/discoloration, air bubbles and thin areas.
- f. Tanks shall be entered in accordance with 29 CFR 1910.94(d)(11). The first internal inspection shall be conducted within five years after a proposed tank becomes operational.
- g. The inspection of each tank shall be certified by a qualified, registered professional engineer, or corrosion technician.
- h. All waste and washwater generated during evacuation of the tanks shall be managed as a hazardous waste, unless the Permittee(s) can document that the waste is not hazardous as defined in 35 Ill. Adm. Code 721.103.

- i. Results of the tests and inspections shall be submitted to the Bureau of Land of this Agency within 60 days of the testing or inspection date, and shall also be included in the operating record of this facility.
- j. If the results of these tests or inspections indicate a tank system is leaking, or unfit for use, the procedures set forth in 35 Ill. Adm. Code 724.296 (as amended July 16, 1987) shall be followed.

I. Reporting and Recordkeeping

- 1. The Permittee(s) shall report to the Agency's Bureau of Land Field Office within twenty-four (24) hours when a leak or spill occurs in the tank system or secondary containment system unless the spill or leak of hazardous waste is less than or equal to one pound in quantity and it is immediately contained and cleaned up.
- 2. Within thirty (30) days of detecting a release as described above to the environment from the tank system or secondary containment system, the Permittee(s) shall report the following information in writing to the Bureau of Land of this Agency:
 - a. Likely route of migration of the release.
 - b. Characteristics of surrounding soil (including soil composition, geology, hydrogeology, and climate).
 - c. Results of any monitoring or sampling conducted in connection with the release.
 - d. Proximity to downgradient drinking water, surface water, and populated areas.
 - e. Description of response actions taken or planned.
- 3. The Permittee(s) shall submit to the Agency all certifications of major repairs to correct leaks within seven days from returning the tank system to use (35 Ill. Adm. Code 724.296(f)).

J. Special Requirements for Ignitable or Reactive Wastes

1. The Permittee(s) shall not place ignitable waste in a tank system, unless the procedures specified in the Approved Permit Application are followed.

- 2. The Permittee(s) shall comply with the requirements for the maintenance of protective distances between the waste management area and any public ways, streets, alleys, or an adjoining property line that can be built upon as required in Tables 2-1 through 2-6 of the National Fire Protection Association's "Flammable and Combustible Liquids Code" (1990).
- 3. "No Smoking" signs must be conspicuously placed wherever there is a hazard from ignitable waste.

K. Special Requirements For Incompatible Wastes

1. The Permittee(s) shall not place incompatible wastes together in the same tank system. The facility shall not store waste in a tank which previously held an incompatible waste, unless the tank system has been decontaminated. Incompatible wastes are identified in Section VIII of this Permit.

L. Closure

At closure, all waste and waste residues must be removed from tanks, discharge control equipment and containment structures. Closure of the tank storage area shall be carried out in accordance with the closure plan in the approved permit application, as modified below:

- 1. The Permittee(s) shall notify the Agency's Bureau of Land in writing of its intent to close the tank system at least 45 days prior to the date closure is expected to begin. Along with this notification, the Permittee(s) shall submit the sampling and analysis plan to be used in demonstrating a tank system has been properly decontaminated. The plan shall be approved by the Agency's Bureau of Land in writing prior to being implemented. Agency review of this plan will be subject to the permit appeal provisions contained in Section 39(a) and Section 40(a) of the Act. The response from the Agency shall approve and establish:
 - a. The sampling plan;
 - b. What contaminants must be analyzed for; and
 - c. The level at which decontamination is considered complete.
- 2. The concrete surfaces shall be visually inspected, photographed and any residue adhering to the surface must be removed by scraping and/or brushing. Following this, the concrete surfaces must be steam cleaned and triple rinsed. All wash and rinse water shall be collected. For tank systems which include secondary containment

systems which met the requirements of 35 Ill. Adm. Code 724.293 at the time of installation, the secondary containment must be certified by an independent, registered, professional engineer indicating that the surface has no cracks, gaps or other defects which would allow waste to migrate through to the underlying soil. If such a certification cannot be made, soil sampling and analysis must be conducted to establish clean closure.

Sweepings collected during closure of any tank system shall be managed as a hazardous waste. All washwater and rinsate generated during the closure of these units shall also be managed as a hazardous waste.

- 3. The Permittee(s) shall provide post-closure care in accordance with 35 Ill. Adm. Code Part 724 for a tank system if all of the hazardous wastes or contaminated soils cannot be practicably removed or decontaminated in accordance with the closure requirements outlined in this permit and in the approved closure plan. If it is determined that the closure requirements cannot be met and post-closure care is required, the tank system shall be considered to be a landfill and the post-closure care plan in the approved application will be modified as required to provide adequate post-closure care for the affected tank system(s) in accordance with 35 Ill. Adm. Code, Subtitle G, Part 724, Subparts G and H.
- 4. Should post-closure care, as described in Condition 3 above, become necessary, the Permittee(s) shall submit an application for modification to this permit, including an amended closure plan and post-closure care plan for the affected tank system within thirty (30) days following discovery that clean closure cannot be accomplished. If a determination is made not to pursue clean closure prior to the implementation of the closure plan for the tank system, the modification request shall be made no later than sixty (60) days after the determination is made.
- 5. Financial assurance for closure and post-closure of any tank system being closed as a landfill, when required in accordance with Conditions 3 and 4 above, shall be updated within thirty (30) days following modification of the permit under the provisions of Condition 4 above.
- 6. Within sixty (60) days after closure of any tank system is complete, the Permittee(s) shall submit certification to the Agency that the unit has been closed in accordance with the approved closure plan.

The closure certification form in Attachment E to this permit or a certification with identical wording must be used. Signatures must meet the requirements of 35 Ill. Adm. Code Section 702.126. The independent engineer should be present at all

critical, major points (activities) during the closure. This might include soil sampling, soil removal, backfilling, final cover placement, etc. The frequency of inspections by the independent engineer must be sufficient to determine the adequacy of each critical activity. Financial assurance must be maintained for each tank system identified in Condition B.1 above. Documents regarding financial assurance for closure of this facility may be modified after the Agency approves the closure certification for any or all of the tank systems. The Agency's review of closure certifications for partial or final closure will be reviewed in accordance with 35 Ill. Adm. Code 724.243.

A Closure Documentation Report must be submitted with the closure certification which includes the following items, if applicable:

- a. The volume of waste and waste residue removed, including wastes generated during decontamination procedures.
- b. A description of the method of waste handling and transport.
- c. Copies of the waste manifests.
- d. A description of the sampling and analytical methods used.
- e. A chronological summary of closure activities and the cost involved.
- f. Tests performed, methods and results.
- g. Color photographs of closure activities which document conditions before, during and after closure.
- h. A scale drawing of all excavated or decontaminated areas and sample locations.
- 7. To avoid creating another regulated storage unit during closure, it is recommended that you obtain any necessary permits for waste disposal prior to initiating excavation activities. If it is necessary to store excavated hazardous waste on-site prior to off-site disposal, do so only in containers or tanks for less than ninety (90) days. The permit exemption (35 Ill. Adm. 722.134) only applies to containers and tanks.
- 8. Under the provisions of 29 CFR 1910 (51 FR 15,654, December 19, 1986), cleanup operations must meet the applicable requirements of OSHA's Hazardous Waste Operations and Emergency Response standard. These requirements include hazard communication, medical surveillance, health and safety programs, air monitoring, decontamination and training. General site workers engaged in activities that expose

or potentially expose them to hazardous substances must receive a minimum of 40 hours of safety and health training off site plus a minimum of three days of actual field experience under the direct supervision of a trained experienced supervisor. Managers and supervisors at the cleanup site must have at least an additional eight hours of specialized training on managing hazardous waste operations.

- 9. If the Agency determines that implementation of this closure plan fails to satisfy the requirements of 35 Ill. Adm. Code 724.211, the Agency reserves the right to amend the closure plan. Revisions of closure plans are subject to the appeal provisions of Section 40 of the Act.
- 10. The Permittee shall analyze all samples individually (i.e., no compositing). Sampling and analytical procedures shall be conducted in accordance with the latest edition of SW-846 and Attachment G to the Illinois EPA's closure plan instruction package. Sample size per interval shall be minimized to prevent dilution of any contamination. Apparent visually contaminated material within a sampling interval shall be included in the same portion of the interval to be analyzed. To demonstrate a parameter is not present in a sample, analysis results must show a detection limit at least as low as the PQL for that parameter as identified in the latest edition of SW-846.

SFN:WRW:bjh\051161s.doc

SECTION III: GROUNDWATER COMPLIANCE MONITORING PROGRAM

A. **SUMMARY**

Hazardous waste constituents have been detected in groundwater monitoring wells at the Clean Harbors Svcs Inc (CHSI) facility in the vicinity of the surface impoundments above the groundwater protection standard and background values. Therefore, a compliance monitoring program meeting the requirements of 35 Ill. Adm. Code 724.199 must be implemented at the CHSI facility. The compliance monitoring program currently consists of five (5) downgradient monitoring wells and four (4) upgradient monitoring wells. Groundwater in the vicinity of the unit has been determined to be 35 Ill. Adm. Code 620.220, Class II General Resource Groundwater.

B. DEFINITIONS

As used herein, the words or phrases set forth below shall have the following definitions:

- 1. "Uppermost Aquifer" refers to the geologic formation nearest the natural ground surface that is an aquifer, as well as lower aquifers that are hydraulically connected with this aquifer in the vicinity of the facility. The uppermost aquifer in the vicinity of the CHSI facility has been identified as a heterogeneous mixture of fill materials composed of cement fragments, masonry, rubble, wood and metal scraps, slag, sludge, cinders and clay. The fill material varies in thickness from approximately seven (7) to eighteen (18) feet. The fill is underlain and hydraulically connected to peat and organic silt of the Holocene Grayslake Peat.
- 2. "Point of Compliance" refers to the vertical surface located at the hydraulically downgradient limits of the waste management area (the closed surface impoundments) extending down into the uppermost aquifer underlying the regulated units.
- 3. "Ft bgs" refers to the number of feet below the ground surface.
- 4. "Ft-MSL" refers to the number of feet below the ground surface referenced to mean sea level.
- 5. "Detected" shall mean a concentration equal to or above the PQL listed in USEPA's SW-846 (Third Edition) for the applicable analytical methods specified in the approved Sampling and Analysis Procedures, which are incorporated by reference in Condition III.H of the Permit.

- 6. "Progressive Increase" shall mean an increase in the concentration of a constituent in successive sampling events.
- 7. "Stick-up" refers to the height of the reference survey datum. This point is determined within \pm 0.01 foot in relation to mean sea level, which in turn is established by reference to an established National Geodetic Vertical Datum.

C. <u>IMPLEMENTATION</u>

- 1. The Permittee shall implement the compliance groundwater monitoring program established in this permit upon the effective date of this permit to determine if the regulated units are in compliance with the groundwater protection standard listed in Condition III.E. On that date, the compliance monitoring requirements set forth in this permit shall supersede those established in the 35 Ill. Adm. Code 725 interim status post-closure and groundwater quality assessment programs, and 35 Ill. Adm. Code 724 compliance monitoring program previously approved by the Illinois EPA.
- 2. The Permittee shall carry out the compliance monitoring program in this permit on the groundwater present beneath the CHSI facility in Chicago, Illinois. The uppermost aquifer is defined as a heterogeneous mixture of fill materials underlain and hydraulically connected to peat and organic silt of the Holocene Grayslake Peat.
- 3. The point of compliance is defined as a vertical surface located at the hydraulically downgradient limit of the surface impoundments that extends down into the uppermost aquifer underlying the surface impoundments. The point of compliance is identified on Drawing No. 4202 of the Approved Permit Renewal Application. The point of compliance is monitored by the following monitoring wells:

G14S, G15S, G16S, G17S, and G18S.

D. WELL LOCATIONS AND CONSTRUCTION

1. The Permittee shall maintain the groundwater monitoring wells identified in the table below to allow for the collection of groundwater samples. The location of these wells is specified in Drawing No. 4202 of the Approved Permit Renewal Application.

IEPA	Facility	Well	Well Depth	Well Screen
Well	Well	Depth	Elevation	Interval
<u>No.</u>	<u>No.</u>	(ft BGS)	(ft MSL)	(ft MSL)
			·	
G10S+	G123S	18.37	573.35	573.35-578.35
G11S+	G307S	13.34	575.70	575.70-585.70
G12S+	G334S	12,79	577.86	577.86-587.86
G13S+	G343S	12.91	577.60	577.60-587.60
G14S*	G120S	20.01	573.05	573.05-578.05
G15S*	G121SR	21.37	571.59	571.41-576.41
G16S*	G122S	18.71	573.71	573.54-578.54
G17S*	G124S	19.57	572.69	572.56-577.56
G18S*	G126S	15.92	576.20	576.20-581.20

Note:

- + Denotes Upgradient Well
- * Denotes Point of Compliance Well
- 2. Construction of each new monitoring well/piezometer must be at a minimum in accordance with the diagram contained in Attachment G-1 to this Permit unless otherwise approved in writing by the Illinois EPA. Any new monitoring well/piezometer must be continuously sampled and logged on an Illinois EPA Field Boring Log contained in Attachment G-2. The construction of any new monitoring well/piezometer must be documented on an Illinois EPA Well Completion Report contained in Attachment G-3.
- 3. The Permittee shall notify the Illinois EPA in writing within thirty (30) days if any of the monitoring wells identified in Condition III.D.1 are damaged or the structural integrity has been compromised. A proposal for the plugging and abandonment of the defective well and the installation of a replacement well shall accompany this notification. Unless the defective well is extremely damaged and would create a potential route for groundwater contamination, the defective well shall not be plugged until the replacement well is on-line and groundwater monitoring data has been obtained and verified by Illinois EPA personnel. Prior to replacing the well, the Permittee shall obtain written approval from the Illinois EPA regarding the proposed installation procedures and construction of the replacement well.
- 4. Should any monitoring well become consistently dry or unserviceable a replacement well shall be provided within ten (10) feet of the existing well. This well shall monitor the same geologic formation as the existing well and be constructed in accordance

with current Illinois EPA groundwater monitoring well construction standards at the time the well is replaced. A replacement monitoring well which is located greater than ten (10) feet from the existing monitoring well, and which does not monitor the same geologic formation, must be approved by the Illinois EPA and designated as a new monitoring well.

5. The Permittee shall submit field boring logs, monitoring well/piezometer construction diagrams and monitoring well completion data sheets of new or replacement monitoring wells to the Illinois EPA at the address below within thirty (30) days of the date that installation of the monitoring well/piezometer is completed. The Permittee shall submit certification that plugging and abandonment of a monitoring well/piezometer was carried out in accordance with the approved procedures to the Illinois EPA at the address below within thirty (30) days of the date that the monitoring well/piezometer is plugged and abandoned. All information should be submitted to the appropriate State Agencies.

Illinois Environmental Protection Agency Permit Section Bureau of Land -- #33 Post Office Box 19276 Springfield, Illinois 62794-9276

- All monitoring wells/piezometers shall be equipped with protective caps and locks.
 Monitoring wells or piezometers located in a high traffic area must be protected with bumper guards.
- 7. All monitoring wells/piezometers not utilized in the approved groundwater monitoring system, but retained by the facility, must also be constructed and maintained in accordance with 77 Ill. Adm. Code, Part 920 regulations.

E. GROUNDWATER PROTECTION STANDARD

1. The following hazardous constituents and their concentration limits comprise the groundwater protection standard at the point of compliance. Total values shall be used for comparison with groundwater quality standards presented in 35 Ill. Adm. Code 620.420. Filtered samples collected for inorganic analysis shall be used for statistical evaluation. The Permittee shall monitor the groundwater at the monitoring wells as described in Condition III.D.1 for the following parameters:

Quarterly Parameter

Field Parameters	STORET	Reporting <u>Units</u>
pH (field measured)	00400	
Specific Conductance (field measured)	00094	micromos/cm
Temperature of Water Sample	00011	°F
Turbidity	45626	Ntus
Depth to Water (below land surface)	72019	Feet
Depth to Water (below measuring point)	72109	Ft - bgs
Elevation of Groundwater Surface	71993	Ft - MSL
Elevation of Bottom of Well #	72020	Ft - MSL
Elevation of Measuring Point (Top of		
casing) ##	72110	Ft - MSL

Shall be determined during the second sampling event each year

Shall be surveyed once every two (2) years, or at the request of the Illinois EPA, or whenever the elevation changes as required by Condition III.J.5.

Inorganic Parameters	STORET	Concentration Limit (mg/L)
Aluminum (tot)	01106	5.0
Aluminum (diss)	01105	ND
Arsenic (tot)	01002	0.2
Arsenic (diss)	01000	
Cadmium (tot)	01027	0.05
Cadmium (diss)	01025	
Chromium (tot)	01034	1.0
Chromium (diss)	01030	
Cyanide (tot)	00720	0.6
Fluoride (tot)	00951	4.0
Fluoride (diss)	00950	
Lead (tot)	01051	0.1
Lead (diss)	01049	
Mercury (tot)	71900	0.01
Mercury (diss)	71890	
Sodium (tot)	00929	20.0
Sodium (diss)	00930	
Vanadium (tot)	01087	0.049
Vanadium (diss)	01085	

Organic Parameters	STORET	Concentration Limits (mg/L)
Acetone	81552	10.7
Acetonitrile	76997	³ 0.042
Aniline	77089	² 0.023
Anthracene	34220	¹ 10.5
Benzene	34030	0.025
p-chloroaniline	73529	¹ 0.028
Chlorobenzene	34301	¹ 0.5
Chloroform	32106	0.0002
2-chlorophenol	34586	¹ 0.175
m-cresol	77151	² 0.35
p-cresol	77146	² 0.035
o-dichlorobenzene	34536	30.0
Dichlorodifluoromethane	34668	² 7.0
1,1-dichloroethylene	34501	0.035
2,4-dichlorophenol	34601	10.021
2,4-dimethylphenol	34606	¹ 0.14
2,6-dichlorophenol	77541	ND
p-dioxane	81582	² 0.001
Ethylbenzene	78113	1.0
Ethyl cyanide	77007	ND
Methylene chloride	34423	0.05
Methyl ethyl ketone	81595	² 4.2
4-methyl-2-pentanone	78133	ND
Naphthalene	34696	¹ 0.22
Phenols	32730	0.1
1,1,2-trichloroethane	34511	0.05
Toluene	34010	2.5
Vinyl chloride	39175	0.01
Xylene (total)	81551	10.0

ND: Not Determined. Insufficient data were available upon which to base a concentration limit. If the chemicals are still detected after all other concentration limits have been achieved, then the Illinois EPA will establish appropriate concentration limits at that time.

The concentration limits are obtained from 35 Ill. Adm. Code 742 (TACO) Appendix B, Table E, Class II, Groundwater Standards.

- The concentration limits are obtained from the Illinois EPA provisional standards.
- The concentration limit for this value was provided by the Illinois EPA.
- 2. The compliance period (post-closure period) during which the groundwater protection standard applies shall be extended until the Permittee demonstrates that the groundwater protection standard has not been exceeded at the point of compliance for three consecutive years.
- 3. Hazardous constituents which have not been detected above the concentration limit for a period of one year (four consecutive quarterly monitoring events) can be deleted from the list with prior approval from the Illinois EPA pursuant to the Class I* permit modification procedure.

F. COMPLIANCE MONITORING PROGRAM

The Permittee shall conduct the Compliance Monitoring Program in accordance with Section E of the Approved Permit Renewal Application, in accordance with the following:

- 1. The Permittee shall determine the groundwater quality and field parameters at each monitoring well identified in Condition III.D.1 during the post-closure care period to determine whether the regulated units are in compliance the groundwater protection standard as identified in Condition III.E.1.
 - a. Samples collected during the first, third and fourth quarters of the post-closure care period shall be analyzed for those hazardous constituents and field parameters identified in Condition III.E.1.
 - b. Samples collected during the second quarter of the post-closure care period shall be analyzed for those hazardous constituents and field parameters identified in Condition III.E.1 and the entire list of 35 Ill. Adm. Code 724, Appendix I parameters.
- 2. The Permittee shall evaluate the results of the analysis required by Condition III.E.1 above and identify:
 - a. The concentration of any constituent detected which was not detected in the previous sampling event.

- b. The concentration of any constituent detected which exhibits a progressive increase over four (4) consecutive sampling events.
- c. The concentration of any constituent detected which is equal to or greater than the groundwater protection standard listed in Condition III.E.1.
- 3. The Permittee, after following the requirements of 35 Ill. Adm. Code 724.199(g), shall add to the list of quarterly monitoring parameters identified in Condition III.E.1, (except those identified in 620.420(a)(2)) any constituent which has been found at a concentration above its respective PQL at any monitoring well at the point of compliance subsequent to the analyses required by Condition III.F.1.b.
- 4. The Permittee shall determine whether there is a statistically significant increase over background values for each constituent identified in Condition III.E.1 each time groundwater quality is determined at the point of compliance. In determining whether such an increase has occurred, the Permittee shall compare the groundwater quality at each monitoring well specified in Condition III.D.1 to background values derived in accordance with statistical procedures specified in Condition III.I.1.
- 5. The Permittee shall determine the groundwater flow rate and direction in the uppermost aquifer at least annually from the monitoring wells listed in Condition III.D.1.

G. GROUNDWATER ELEVATIONS

- 1. The Permittee shall determine the groundwater surface elevation referenced to mean sea level (MSL) each time a groundwater sample is collected at a well.
- 2. The Permittee shall determine the surveyed elevation of the "stick-up" referenced to MSL when the well is installed (with as-built diagrams) and every two years, or at the request of the Illinois EPA, or whenever the elevation changes.
- 3. Elevation, as referenced to MSL, of the bottom of each monitoring well (STORET 72020), is to be reported at least annually. The mandatory measurements shall be taken during the second quarterly sampling event each year.

H. SAMPLING AND ANALYTICAL PROCEDURES

- 1. The Permittee shall use the techniques and procedures described in Section E of the Approved Permit Renewal Application except as modified below, when obtaining and analyzing samples from the groundwater monitoring wells described in Condition III.D.1:
 - a. Samples shall be collected by the techniques described within Volume 2a, Section E; Appendix D within Volume II of Appendix 6 of the Approved Permit Renewal Application.
 - b. Samples shall be preserved, shipped, and handled in accordance with the procedures specified within Volume 2a, Section E; Appendix D within Volume II of Appendix 6 of the Approved Permit Renewal Application.
 - c. Samples shall be analyzed in accordance with the procedures specified within Volume 2a, Section E; Appendix D within Volume II of Appendix 6 of the Approved Permit Renewal Application.
 - d. Samples shall be tracked and controlled using the chain of custody procedures specified within Volume 2a, Section E; Appendix D within Volume II of Appendix 6 of the Approved Permit Renewal Application.

I. STATISTICAL PROCEDURES

- 1. The Permittee shall use the statistical procedures described in Volume 2a, Section E.5, and within Volume 2b, Section E; Appendix H within Volume III of Appendix 6 of the Approved Permit Renewal Application, which are in keeping with USEPA's Statistical Analysis of Groundwater/Monitoring Data at RCRA Facilities, Interim Final Guidance (1989), or Addendum to Interim Final Guidance (1992).
- 2. Prediction limits shall be updated annually in accordance with the approved procedure set forth in Condition III.I.1 above.
- 3. Prediction limits established in accordance with Condition III.I.2 above shall be reported by July 15th of each year and are subject to approval by the Illinois EPA.

J. REPORTING AND RECORDKEEPING

- 1. The Permittee shall enter all monitoring, testing, and analytical data obtained in accordance with Condition III.E, III.F, III.G, III.H, and III.I in the operating record.
- 2. Samples collected to meet the requirements of the groundwater monitoring program as described in Condition III.E and III.F shall be collected and reported as identified in the table below. All additional data collected for the groundwater monitoring program (as specified in Condition III.H and III.I) shall also be submitted in accordance with the following schedule.

Samples to be	Results Submitted	
Collected During	to the Illinois EPA	
the Month of	by the Following	Parameters
January - February	April 15	F.1.a
April - May	July 15	F.1.a, F.1.b
July - August	October 15	F.1.a
October - November	January 15	F.1.a

Reports submitted to the Illinois EPA must clearly identify (1) any statistically significant increases and (2) any exceedances of appropriate groundwater classification standards.

- 3. Groundwater surface elevation data, measured pursuant to Condition III.G.1 shall be collected quarterly and submitted to the Illinois EPA as identified in the above table.
- 4. The Permittee shall report the groundwater flow rate and direction in the uppermost aquifer, as required by Condition III.F.5, during the second sampling event of each year.
- 5. The Permittee shall report the surveyed elevation, as required by Condition III.G.2 of the top of the well casing ("stick-up"), referenced to MSL, in accordance with the following schedule:
 - a. For the wells identified in Condition III.D.1. above, every two years (during the second sampling event), or at the request of the Illinois EPA, or whenever the elevation changes.
 - b. For any new wells, at the time of installation and reported in the as-built diagrams. Subsequent measurements shall be made every two (2) years (during

the second sampling event), or at the request of the Illinois EPA, or whenever the elevation changes.

- 6. Elevation of the bottom of each monitoring well identified in Condition III.D.1 referenced to MSL, is to be reported annually. This measurement shall be taken during the second quarterly sampling event each year in accordance with Condition III.G.3.
- 7. Information required by Conditions III.J.2, III.J.3, and III.J.6 must be submitted in an electronic format. The information is to be submitted as fixed-width text files, formatted as found in Attachment G.5 of this Permit, in accordance with the schedule found in Condition III.J.2 above. Additional guidance regarding the submittal of the information in an electronic format can be found at www.epa.state.il.us/land/waste-mgmt/ground-monitoring.html.
- 8. The Permittee shall submit a completed "RCRA Facility Groundwater, Leachate and Gas Reporting Form" (LPC 592) as a cover sheet for any notices or reports required by the facility's Permit for identification purposes. Only one copy of the LPC 592 must accompany your submittal. However, the Permittee must submit one (1) original and (excluding the groundwater and leachate monitoring results submitted in an electronic format) a minimum of two (2) copies of each notice or report you submit to the Illinois EPA. The form is not to be used for Permit modification requests. A copy of the LPC 592 can be found in Attachment G.6 of this Permit. Additional copies can be found at www.epa.state.il.us/land/regulatory-programs/permits-and-management/forms/rcra-groundwater-leachate-form.doc.
- 9. The Permittee shall report all information to the Illinois EPA in a form which can be easily reviewed. All submittals must contain tables of data, drawings and text (as necessary) to accurately describe the information contained in the submittal.
- 10. If the Permittee determines pursuant to Condition III.F.3 that Appendix I constituents are present at the point of compliance monitoring wells at concentrations above their respective PQLs and are not already identified as quarterly monitoring constituents, it shall:
 - a. Resample the well within one (1) month and repeat the Appendix I analysis. If the second analysis confirms the presence of new constituents the Permittee shall report the concentration of these additional constituents to the Illinois EPA within seven (7) days after the resample and add them to the monitoring list; or,

- b. Not resample the well and report the concentrations of these additional constituents to the Illinois EPA within seven (7) days after completion of the initial analysis, and add them to the monitoring list.
- 11. If the Permittee determines that there is a statistically significant increase for any of the parameters specified in Condition III.E.1 at any monitoring well at the point of compliance, the Permittee shall:
 - a. Notify the Illinois EPA in writing within seven (7) days indicating what parameters and wells have shown statistical increases and provide calculations.
 - b. Submit to the Illinois EPA an application for a permit modification to establish a corrective action program meeting the requirements of 35 Ill. Adm. Code 724.200 within 180 days.
- 12. If the Permittee determines that there is a statistically significant increase for any of the parameters specified in Condition III.E.1, the Permittee may demonstrate that a source other than a regulated unit caused the contamination, or that the detection is an artifact caused by an error in sampling, analysis or statistical evaluation, or natural variation in groundwater. To make this demonstration the Permittee shall:
 - a. Notify the Illinois EPA in writing within seven (7) days that it intends to make a demonstration under 35 Ill. Adm. Code 724.199(i);
 - b. Within ninety (90) days, submit a report to the Illinois EPA which demonstrates that a source other than a regulated unit caused the standard to be exceeded or that the apparent noncompliance with the standards resulted from error in sampling, analysis or evaluation;
 - c. Within ninety (90) days, submit to the Illinois EPA an application for a permit modification to make any appropriate changes to the compliance monitoring program at the facility; and,
 - d. Continue to monitor in accord with the compliance monitoring program established under Condition III.H.

K. REQUEST FOR PERMIT MODIFICATION

1. If the Permittee determines that the compliance monitoring program no longer satisfies the requirements of 35 Ill. Adm. Code 724.199, then within ninety (90) days, the

Permittee must submit an application for a permit modification to the Bureau of Land of the Illinois EPA to make any appropriate changes to the program which will satisfy the regulations.

2. Conditions in this Section of the Permit may be modified in accordance with 35 Ill. Adm. Code 705.128 if there is cause for such modification, as defined in 35 Ill. Adm. Code 702.184. Causes for modification as identified in this Section include, but are not limited to, alterations to the Permittee facility, additional information which would have justified the application of different permit conditions at the time of issuance, and new regulations.

SFN:WRW:bjh\051161s.doc

SECTION IV: REPORTING AND NOTIFICATION REQUIREMENTS

The reporting and notification requirements of each section of the RCRA permit are summarized below. This summary is provided to highlight the various reporting and notification requirements of this permit.

Condition	Submittal	<u>Due Date</u>
SECTION I: CON	TAINERS	
G(2)	Submit written notification to the Agency of failure of concrete surface coating	Within thirty days of becoming aware of the failure
G(2)	Submit application for modification of the permit	If necessary, no later than 180 days after failure of the coating
K(1)	Submit Construction Certification Report for proposed container storage units	30 days after completing the construction of the container storage area
L(1)	Submit written notification to the Agency of intent to close the container storage area	45 days prior to commencement of closure
L(1)	Submit sampling and analysis plan for review	45 days prior to commence to closure
L(5)	Submit application for modification of permit and post-closure care plan	No later than 30 days after determination that the container storage area cannot be clean closed
L(6)	Update financial assurance to include modification in Conditions I(K)(4) or I(K)(5)	30 days after permit is modified

Page IV-2 of IV-9

Condition	Submittal	<u>Due Date</u>
L(7)	Submit certification for closure of the container storage area	Within 60 days after closure is completed
SECTION II: TAN	K SYSTEMS	
C(3)	Submit written notification to the Agency of failure of the concrete coating system	Within thirty days of becoming aware of the failure
C(3)	Submit application for modification of the permit	If necessary, no later than 180 days after failure of the coating
D(1)(a)	Submit Construction Certification Report for the proposed tanks as required by 35 IAC 724.292 and 724.293	30 days after completing the construction of the tank systems
H(6)(i)	Submit results of tank integrity assessment	60 days after inspection
I(1)	Notify Agency of a leak or spill unless the spill or leak of hazardous waste is less than or equal to one pound and it is immediately container and cleaned up	24 hours after leak or spill occurs
I(2)	Submit report to the Agency on release and Permittee's response	30 days after leak or spill occurs
I(3)	Submit certification of major reports	Within seven days from returning tank system to service
L(1)	Submit written notification to the Agency of intent to close tank system(s)	45 days prior to commencement of closure

Page IV-3 of IV-9

Clean Harbors Services, Inc RCRA Log No. B-16R-M-16

Condition	Submittal	Due Date			
L(1)	Submit sampling and analysis plan	45 days prior to commencement of closure			
L(4)	Submit application for permit modification and post-closure care	30 days after determination that a tank system must be closed as a landfill			
L(5)	Update Financial Assurance for closure or post-closure	30 days after effective date of permit or modification of permit			
L(6)	Submit certification of closure of tank system(s)	60 days after closure of tank systems(s) is complete			
SECTION III: GR	SECTION III: GROUNDWATER MONITORING				
I(3)	Submit prediction limits	By July 15 th of each year			
J(2)	Groundwater monitoring results	Quarterly			
J(3)	Groundwater surface elevation data	Quarterly			
J(4)	Groundwater flow rate and direction	By July 15 th of each year			
J(5)(a)	Surveyed elevation of the top of the well casing	By July 15 th biennially			
J(5)(b)	Surveyed elevation of the top of the well casing	Upon installation and by July 15 th biennially			
J(6)	Bottom of well elevation	By July 15 th of each year			
J(10)	Notification of constituents above PQL	Within 7 days			
J(11)(a)	Notification of statistically significant increase	Sample within 7 days of determination			

Condition	Submittal	<u>Due Date</u>
J(11)(b)	Submit application to establish corrective action program	Within 180 days of determination
J(12)(a)	Submit notice of intent to perform a demonstration	Within 7 days of the date exceedance is discovered
J(12)(b)	Submit report of demonstration	Within 90 days of the date exceedance is discovered
J(12)(c)	Modification to the compliance monitoring program	Within 90 days of the date exceedance is discovered
K(1)	Modification to the compliance monitoring program	Within 90 days of determining the program no longer satisfies 724.199

SECTION V: CORRECTIVE ACTION

Condition	Submittal	Due Date
C(4)	Phase I CMP Report	Within 90 days of notification
D(1)	Cost Estimate	Within the submittal of each workplan
D(2)	Documentation of financial assurance	Within 60 days of approval of cost estimate
E(1)	Notification of newly-identified SWMU's	Within 30 days after discovery
E(3)	A SWMU assessment plan	Within 60 days of IEPA request for

SECTION VI: STANDARD CONDITIONS

6	Complete application for new permit.	180 days prior to permit expiration.
11	Information requested by Agency and copies of records required to be kept by this permit.	Submittal date to be determined by Agency, but no later than 30 days from dated request.
14	Written notification to the Agency of planned physical alterations or additions.	15 days prior to planned change.
15	Written notification to the Agency of changes which may result in permit noncompliance.	Within 15 days of change.
16	Application for permit modification indicating permit is to be transferred	At least 90 days prior to transfer date.
18	Submission of any information required in a compliance schedule	14 days after each schedule date
19	Report to Agency any non-compliance which may endanger health or environment	
	by telephone	24 hours after discovery
·	in writing	5 days after discovery
20	Report all other instances of noncompliance	March 1 of each year along with Annual Report
27	Waste minimization certification	At least annually
28	Notify the Agency in writing of expected receipt of hazardous waste from a foreign source	4 weeks prior to receipt of waste

Page IV-6 of IV-9

0316000051 Clean Harbors Services, Inc RCRA Log No. B-16R-M-16

Condition	Submittal	Due Date
40	Update arrangements with local authorities	At least annually
41	Implementation of Contingency Plan	As needed
	Notify appropriate state and local agencies with designated response roles	As needed
	Notify appropriate local officials	Immediately, if emergency coordinator's assessment indicates evacuation of local area is advisable
	Notify the Agency (217/782-3637) or Illinois EMA (217/782-7860) if the emergency coordinator determines	Immediately after determination made
	there has been a release, fire or explosion which could threaten human health or the environment, outside the facility	
	Notify Agency and appropriate state and local authorities, in writing that facility is in compliance with 35 Ill. Adm. Code 724.156(h)	Prior to resuming operation in affected areas
	Written Report to Agency with details regarding the incident which required implementation of contingency plan	15 days after event
47	Submit annual report required by 35 Ill. Adm. Code 724.175	March 1 of each year
49	Submit Application for permit modification amending closure plan	Within 90 days of discovery of need for modification

Page	IV-7	of IV-	.9
------	------	--------	----

Condition	Submittal	Due Date
50	Written notification to the Agency of closure	45 days prior to beginning closure
54(a)	Adjust closure cost estimate for inflation	Within 60 days prior to anniversary date of the establishment of the financial instrument
54(b)	Revision of closure cost estimate	As needed, within 90 days of discovery of revision
55	Change in financial assurance mechanism for closure	As needed
56	Change in coverage for sudden and non-sudden accidental occurrences	As needed
57	Written notification to the Agency of commencement of voluntary or involuntary bankruptcy proceedings	10 days after commencement of proceeding

SECTION VII: MISCELLANEOUS UNIT

Condition	Submittal	Due Date
K(1)	Submit Construction Certification Report for proposed Miscellaneous Units	30 days upon completing development and installation of the unit
L(1)	Submit written notification to the Agency of intent to close the container storage area	45 days prior to commencement of closure
L(1)	Submit sampling and analysis plan for review	45 days prior to commence to closure

Condition	Submittal	Due Date
L(5)	Submit application for modification of permit and post-closure care plan	No later than 30 days after determination that the container storage area cannot be clean closed
L(6)	Update financial assurance to include modification in Conditions I(K)(4) or I(K)(5)	30 days after permit is modified
L(7)	Submit certification for closure of the container storage area	Within 60 days after closure is completed
SECTION VII	I: SPECIAL CONDITIONS	
A(2)(b)	Notice of manifest discrepancy	Within 15 days after receiving the waste
E(1)	Notify Agency's BOL Field Office	Within 24-hours of implementation of Contingency Plan
E(2)	Notify Emergency Response Teams	Immediately upon implementation of contingency plan
G(8)	LDR treatment demonstration	Within 30 days after completion of the analysis
K(1)	A survey plat indicating the disposal area	By September 9, 2005
K(1)	A certification by a land surveyor	By September 9, 2005
K(2)	A statement by an independent fire control professional or the responsible fire department	By April 11, 2006

SECTION IX: AIR EMISSION STANDARDS FOR EQUIPMENT LEAKS

F(1)

Submit report semiannually

March 31st and

September 30th

SECTION X: AIR EMISSION STANDARDS FOR TANKS, SURFACE IMPOUNDMENTS AND CONTAINERS

D(1)

Submit report semiannually

March 31st and

September 30th

ATTACHMENT F: FINANCIAL ASSURANCE REQUIREMENTS

I(B)

Financial Assurance

60 days prior to placing

waste in units listed in

I.A.ii

SFN:WRW:bjh\051161s.doc

SECTION V CORRECTIVE ACTION

A. <u>INTRODUCTION</u>

- 1. In accordance with Section 3004 of RCRA and 35 IAC 724.201, the Permittee shall institute such corrective action as necessary to protect human health and the environment from all releases of hazardous wastes or hazardous constituents from any solid waste management unit (SWMU) at its facility in Chicago, Illinois. This section contains the conditions which must be followed to ensure these requirements are met.
- 2. A substantial amount of corrective action work has already been completed at this facility under the provisions of: (1) a RCRA permit initially issued to Clean Harbors on September 30, 1993; and (2) a Consent Order between USEPA and a former owner of a portion of the facility. This section summarizes that work and identifies what must still be done by the Permittee to complete its corrective action responsibilities for the SWMUs of concern at this facility.
- 3. The Permittee must provide corrective action, as appropriate, for any future releases from SWMUs present at the facility.
- 4. The requirements of 35 Ill. Adm. Code 742 must be met, when applicable, in establishing remediation objectives for corrective action.

B. CORRECTIVE ACTION ACTIVITIES COMPLETED TO DATE

The current Clean Harbors facility is actually comprised of two former hazardous waste management facilities. The northern portion of the current facility (approximately 30.6 acres in size) was formerly an interim status hazardous waste treatment facility (which included an incinerator) last owned/operated by Chemical Waste Management (CWM). The southern portion of the facility (approximately 26 acres in size) has been owned/operated by Clean Harbors since 1989 and received a RCRA permit for hazardous waste storage/treatment on September 30, 1993. On June 30, 1995, a modified RCRA permit was issued to Clean Harbors allowing it to incorporate the CWM facility into its RCRA permit.

A brief summary of relevant interim status closure and corrective action efforts completed to date at this facility is as following:

- 1. Interim status closure plans have been approved for several hazardous waste management units at the former CWM Incinerator facility, including the incinerator itself
 - a. These plans have been assigned Log Nos. C-742, C-759 and C-771 by Illinois EPA;
 - b. Closure (and thus corrective action) of all these units will essentially be considered complete upon the establishment of an engineered barrier and associated institutional control required by Illinois EPA's December 4, 2004 letter. Once the engineered barrier and institutional control are established, Clean Harbors will be required to comply with the requirements in the institutional control.
 - c. Additional remedial activities at these units shall be carried out under the provisions of their interim status closure plans.

More details regarding these efforts are contained in Attachment H.1.

- 2. Clean Harbors conducted a major upgrading during 1994-5 at the former CWM incinerator facility.
 - a. A pre-construction soil investigation was conducted at five of these units. Contaminated soil was encountered at the location of each proposed unit which required further evaluation under the facility's RCRA corrective action program;
 - b. Additional investigations have been completed at these units;
 - c. Each of these units is addressed in the Phase I Soils CMP submitted to Illinois EPA on May 7, 2004.

More details regarding these efforts are contained in Attachment H.2.

- 3. RCRA corrective action efforts conducted at the original Clean Harbors facility under its RCRA permit are as follows:
 - a. A total of 18 SWMUs were of concern
 - b. RFI activities are complete

- c. A Phase I CMP plan was submitted in May 2004 and is under review
- More details regarding these efforts are contained in Attachment H.3.
- 4. RCRA corrective action efforts conducted at the former CWM incinerator facility under a 3008(h) order between CWM and USEPA and the RCRA permit for this facility are as follows:
 - a. A total of 10 SWMUs were of concern
 - b. RFI activities are complete
 - c. A Phase I Soils CMP was submitted in May 2004 and is under review

More details regarding these efforts are contained in Attachment H.4.

C. CORRECTIVE MEASURE REQUIREMENTS

- 1. Permittee must implement a Corrective Measures Program (CMP) in general accordance with the procedures set forth in Attachment I to this permit. The corrective measures implemented by the Permittee must be sufficient to ensure the appropriate requirements of 35 Ill. Adm. Code 302, 620, 724, and 742 are met.
- 2. The types of corrective measures which may be implemented include, but are not limited to:
 - a. Removal of the contaminants or the contaminated media so that the remaining media meet remediation objectives developed in accordance with 35 Ill. Adm. Code 742;
 - b. Closing the SWMU as a landfill by establishing a proper final cover over the SWMU and then providing proper long-term monitoring/maintenance/management of: (1) leachate; (2) subsurface gas: (3) final cover system; and (4) groundwater;
 - c. Establishing engineered barriers to restrict exposure to the contaminants remaining at the SWMU (necessary to certain remediation objectives developed in accordance with 35 Ill. Adm. Code 742);

- d. Establishing institutional controls to restrict activities at the facility, as necessary, to support remediation objectives established in accordance with 35 Ill. Adm. Code 742.
- 3. The Corrective Measures Program described in Attachment I consists of five phases:
 - a. Phase I--conceptual design of the selected corrective measure;
 - b. Phase II--development of the final design plans for the corrective measure, including installation and operation/maintenance plans;
 - c. Phase III--actual construction/installation/implementation of the corrective measure;
 - d. Phase IV—operation/maintenance/monitoring, as necessary, of the corrective measure to ensure it is being properly implemented and is properly protecting human health and the environment.
 - e. Phase V--demonstration/verification that the corrective measure has been completed and that the established remediation objectives have been achieved.
 - f. Phases may be combined or skipped, depending on the actual corrective measure selected. The overall CMP implemented at a given SWMU must: (1) be logical in nature: and (2) allow for Illinois oversight and approval throughout the entire process. As such, it will be necessary for the Permittee to submit workplans/reports regarding all aspects of corrective measures for Illinois EPA review and approval prior to carrying out any corrective measure activity.
- 4. A Phase I CMP report, or its equivalent, must be submitted to Illinois EPA within ninety (90) days of the date that Illinois EPA notifies the Permittee of the need for a Corrective Measures Program.
- 5. Subsequent CMP reports must be submitted to Illinois EPA for review and approval in accordance with a schedule approved by Illinois EPA.
- 6. For units closed as landfills:

- a. The Phase II report must include a plan for the construction of a final cover system as well as a post-closure care plan (the post-closure care plan must include provisions for (1) inspecting the final cover; (2) monitoring the groundwater and soil gas; and (3) taking corrective action if any problems are observed during the inspection/monitoring effort.
- b. The Phase III report must document the construction of the approved final cover system.
- c. During Phase IV, quarterly reports must be submitted documenting the results of the inspection/monitoring efforts as well as any corrective measures taken in response to problems observed during these efforts. It will be necessary to submit plans to Illinois EPA for review and approval to address any groundwater quality or gas migration problems.
- d. The Phase V report will not be submitted until the post-closure care period has been completed. This report must demonstrate that all applicable post-closure requirements have been met and that the groundwater at the site meets the applicable standards.
- 7. Once all corrective measures have been completed, a report must be developed documenting all efforts and results associated with the completed measure, including, as appropriate, information demonstrating the approved remediation objectives for the project have been achieved.
- 8. Illinois EPA action on all Corrective Measures Program submittals shall be subject to the appeal provisions of Sections 39(a) and 40(a) of the Illinois Environmental Protection Act.
- 9. Groundwater for all portions of this facility, except that groundwater subject to the requirements of Section III of this permit, must meet the requirements of: (1) previous Illinois EPA letters and actions regarding groundwater, and (2) 35 Ill. Adm. Code 620, 724 and 742. In order to meet these requirements, a proposal for the establishment of a Groundwater Management Zone at the facility must be submitted within sixty (60) days of the Illinois EPA's approval of the Phase II Corrective Measures Program (CMP). This application must address all groundwater at the facility which exceeds the groundwater quality standards of 35 Ill. Adm. Code 620, and must be developed in accordance with 35 Ill. Adm. Code 620.250. A guidance document to be utilized for establishing a GMZ can be found at www.epa.state.il.us/land/regulatory-programs/permits-and-management/establishing-groundwater-management-zone.html.

D. FINANCIAL ASSURANCE FOR CORRECTIVE ACTION

- 1. The Permittee shall prepare a cost estimate for the completion of any corrective action required under this permit, in order to provide financial assurance for completion of corrective action, as required under 35 IAC 724.201(b). Such a cost estimate will be based upon the cost of contamination investigations and assessments for the SWMU(s), and design, construction, operation, inspection, monitoring, and maintenance of the corrective measure(s) to meet the requirements of 35 IAC 724.201 and this permit. This cost estimate must be included in each workplan or report submitted to Illinois EPA.
- 2. The Permittee shall demonstrate continuous compliance with 35 IAC 724.201 by providing documentation of financial assurance using a mechanism specified in 35 IAC 724.243, in at least the amount of the cost estimate required under Condition V.D.1. The words "completion of corrective action" shall be substituted for "closure and/or post-closure," as appropriate in the financial instrument specified in 35 IAC 724.251. This documentation shall be submitted to the Illinois EPA's DLPC within 60 days after the Illinois EPA's approval of the initial or revised cost estimates required under Condition V.D.1. The Illinois EPA's DLPC may accept financial assurance for completion of corrective action in combination with another financial mechanism that acceptable under 35 IAC 724.246 at its discretion.

E. REQUIREMENTS FOR ADDRESSING NEWLY- IDENTIFIED SWMU(s)

- 1. The Permittee shall notify the Illinois EPA's DLPC in writing of any newly-identified SWMU(s) discovered during the course of groundwater monitoring, field investigations, environmental audits, or other means, no later than thirty (30) calendar days after discovery. The notification shall provide the following information, as available:
 - a. The location of the newly-identified SWMU in relation to other SWMUs on a scaled map or drawing;
 - b. The type and past and present function of the unit;
 - c. The general dimensions, capacities, and structural description of the unit (available drawings and specifications provided);
 - d. The period during which the unit was operated;

- e. The specifics on all materials, including but not limited to, wastes and hazardous constituents, that have been or are being managed at the SWMU, to the extent available; and
- f. The results of any relevant available sampling and analysis which may aid in determining whether releases of hazardous wastes or hazardous constituents have occurred or are occurring from the unit.
- 2. If the submitted information demonstrates a potential for a release of hazardous waste or hazardous waste constituents from the newly identified SWMU, the Illinois EPA's DLPC may request in writing, that the Permittee prepare a Solid Waste Management Unit (SWMU) Assessment Plan and a proposed schedule of implementation and completion of the Plan for any additional SWMU(s) discovered subsequent to the issuance of this Permit. This SWMU Assessment plan must also propose investigations, including field investigations if necessary. to determine the release potential to specific environmental media for the newly-identified SWMU. The SWMU Assessment Plan must demonstrate that the sampling and analysis program, if applicable, is capable of yielding representative samples and must include parameters sufficient to identify migration of hazardous waste and hazardous constituents from the newly-discovered SWMU(s) to the environment. Additional guidance regarding the requirements of the SWMU Assessment Plan will be provided in Illinois EPA's written request for such a plan.
- 3. Within 60 calendar days after receipt of the Illinois EPA's DLPC request for a SWMU Assessment Plan, the Permittee shall submit a SWMU Assessment Plan.
- 4. After the Permittee submits the SWMU Assessment Plan, the Illinois EPA's DLPC shall either approve, approve with conditions or disapprove the Plan in writing. If the plan is approved, the Permittee shall begin to implement the Plan within forty-five (45) calendar days of receiving such written notification. If the Plan is disapproved, the Illinois EPA's DLPC shall notify the Permittee in writing of the Plan's deficiencies and specify a due date for submittal of a revised plan.
- 5. The Permittee shall submit a report documenting the results of the approved SWMU Assessment Plan to the Illinois EPA's DLPC in accordance with the schedule in the approved SWMU Assessment Plan. The SWMU Assessment Report shall describe all results obtained from the implementation of the approved SWMU Assessment Plan. Additional assessment work may be needed to fully characterize any contamination present at the SWMU.

6. The Permittee must implement a Corrective Measures Program, as necessary, to properly address any contamination encountered during the assessment.

Guidance regarding the implementation of this program will be provided at the time Illinois EPA notifies the Permittee of the need for such a program.

F. FUTURE RELEASES FROM SWMUs

There exists a potential that a release may occur in the future from SWMUs identified in the RFA which did not require any corrective action at the time that the RFA or RFI was completed. If the Permittee discovers that a release has occurred from such a SWMU in the future, then the Illinois EPA must be notified of this release within thirty (30) days after its discovery following the procedures set forth in Condition V.E.1 above. Additional investigation and, as necessary, corrective measures efforts at this SWMU must be carried out in accordance with the procedure set forth in Subsection E above. The results of all corrective action efforts required by this condition must meet the requirements of 35 Ill. Adm. Code 724.201.

G. <u>INTERIM MEASURES/STABILIZATION</u>

The Permittee shall carry out interim measures/stabilization activities in order to prevent or mitigate the migration of a release of hazardous substances into the environment, and to provide adequate protection of public health, welfare and the environment.

At any time during the RFI, the Permittee may initiate additional interim measures for the purpose of preventing continuing releases and/or mitigating the results of releases and/or mitigating the migration of hazardous wastes or hazardous constituents. It shall not be necessary to conduct all phases of the RFI investigation prior to implementing an interim measure if the Illinois EPA's DLPC and the Permittee agree that a problem can be corrected, or a release cleaned up, without additional study and/or without a formal CMS.

- 1. Prior to implementing any interim measures beyond those specified above, the Permittee must submit detailed information regarding the proposed interim measure to the Illinois EPA's DLPC for approval. This information shall include, at a minimum:
 - a. Objectives of the interim measures: how the measure is mitigating a potential threat to human health and the environment and/or is consistent with and integrated into any long-term solution at the facility;
 - b. Design, construction, and maintenance requirements;

- c. Schedules for design and construction; and
- d. Schedules for progress reports.
- 2. If the Illinois EPA's DLPC determines that a release cannot be addressed without additional study and/or a formal CMS, then the Illinois EPA's DLPC will notify the Permittee that these must be performed. Any proposal made under this provision or any other activity resulting from such proposal, including the invocation of dispute resolution, shall not affect the schedule for implementation of the RFI or of any other portion of the permit.
- 3. If the Illinois EPA determines that interim measures are necessary to protect human health or the environment, the Permittee will be notified by way of a permit modification.

SFN:WRW:bjh\051161s.doc

SECTION VI: STANDARD CONDITIONS

GENERAL REQUIREMENTS

- 1. EFFECT OF PERMIT. The existence of a RCRA permit shall not constitute a defense to a violation of the Act or 35 Ill. Adm. Code Subtitle G, except for development, modification or operation without a permit. Issuance of this permit does not convey property rights or any exclusive privilege. Issuance of this permit does not authorize any injury to persons or property or invasion of other private rights, or infringement of state or local law or regulations. (35 Ill. Adm. Code 702.181)
- 2. PERMIT ACTIONS. This permit may be modified, reissued or revoked for cause as specified in 35 Ill. Adm. Codes 703.270 through 703.273 and Section 702.186. The filing of a request by the Permittee(s) for a permit modification or revocation, or a notification of planned changes or anticipated noncompliance on the part of the Permittee(s) does not stay the applicability or enforceability of any permit condition. (35 Ill. Adm. Code 702.146)
- 3. SEVERABILITY. The provisions of this permit are severable, and if any provision of this permit, or the application of any provision of this permit to any circumstance is held invalid, the application of such provision to other circumstances and the remainder of this permit shall not be affected thereby. (35 Ill. Adm. Code 700.107)
- 4. PERMIT CONDITION CONFLICT. In case of conflict between a special permit condition and a standard condition, the special condition will prevail. (35 Ill. Adm. Code 702.160)
- 5. DUTY TO COMPLY. The Permittee(s) shall comply with all conditions of this permit except the extent and duration such noncompliance is authorized by an emergency permit. Any permit noncompliance constitutes a violation of the Act and is grounds for an enforcement action; permit revocation or modification; or for denial of a permit renewal application. (35 Ill. Adm. Code 702.141 and 703.242)
- 6. DUTY TO REAPPLY. If the Permittee(s) wishes to continue an activity allowed by this permit after the expiration date of this permit, the Permittee(s) must apply for a new permit at least 180 days before this permit expires, unless written permission for a later date has been granted by the Agency. (35 Ill. Adm. Codes 702.142 and 703.125)
- 7. PERMIT EXPIRATION. This permit and all conditions herein will remain in effect beyond the permit's expiration date if the Permittee(s) has submitted a timely and complete application (see 35 Ill. Adm. Code 703.181-703.209) and through no fault of the Permittee(s) the Agency has not issued a new permit as set forth in 35 Ill. Adm. Code 702.125.

- 8. NEED TO HALT OR REDUCE ACTIVITY NOT A DEFENSE. It shall not be a defense for the Permittee(s) in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit. (35 Ill. Adm. Code 702.143)
- 9. DUTY TO MITIGATE. In the event of noncompliance with the permit, the permittee shall take all reasonable steps to minimize releases of hazardous substances to the environment. The Permittee(s) shall carry out such measures as may be necessary to prevent significant adverse impacts on human health or the environment. (35 Ill. Adm. Code 702.144)
- 10. PROPER OPERATION AND MAINTENANCE. The Permittee(s) shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the Permittee(s) to achieve compliance with the conditions of this permit. Proper operation and maintenance includes effective performance, adequate funding, adequate operator staffing and training, and adequate laboratory, and process controls, including appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems only when necessary to achieve compliance with the conditions of the permit. (35 Ill. Adm. Code 702.145)
- 11. DUTY TO PROVIDE INFORMATION. The Permittee(s) shall furnish to the Agency, within a reasonable time, but no later than thirty days, any relevant information which the Agency may request to determine whether cause exists for modifying, revoking and reissuing or terminating this permit, or to determine compliance with this permit. The Permittee(s) shall also furnish to the Agency, upon request, copies of records required to be kept by this permit. (35 Ill. Adm. Code 702.148)
 - Furthermore, the Permittee(s) shall provide to the Agency any documentation that is required by the Act or regulations.
- 12. INSPECTION AND ENTRY. The Permittee(s) shall allow an authorized representative of the Agency, upon the presentation of credentials and other documents as may be required by law, to:
 - a. Enter at reasonable times upon the Permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this permit;
 - b. Have access to and copy, at reasonable times, any records that must be kept under the conditions of this permit;

- c. Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and
- d. Sample or monitor, at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by the appropriate statute, any substances or parameters at any location. (35 Ill. Adm. Code 702.149)

13. MONITORING AND RECORDS. (35 Ill. Adm. Code 702.150)

- a. Samples and measurements taken for the purpose of monitoring shall be representative of the monitored activity. The method used to obtain a representative sample of the waste must be the appropriate method from Appendix A of 35 Ill. Adm. Code 721. Laboratory methods must be those specified in Test Methods for Evaluating Solid Waste: Physical/Chemical Methods, SW-846, latest versions; Methods for Chemical Analysis of Water and Wastes, EPA-600/4-79-020, latest versions; or an equivalent method as specified in the approved Waste Analysis Plan.
- b. The Permittee(s) shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports and records required by this permit, and records of all data used to complete the application for this permit for a period of at least 3 years from the date of the sample, measurement, report or application. These periods may be extended by request of the Agency at any time. The permittee shall maintain records from all groundwater monitoring wells and associated groundwater surface elevations, for the active life of the facility, and for disposal facilities for the post-closure care period as well.
- c. Records of monitoring information shall include:
 - i. The date(s), exact place, and time of sampling or measurements;
 - ii. The individual(s) who performed the sampling or measurements;
 - iii. The date(s) analyses were performed;
 - iv. The individual(s) who performed the analyses;
 - v. The analytical technique(s) or method(s) used; and
 - vi. The result(s) of such analyses. (35 Ill. Adm. Code 702.150)

- 14. REPORTING PLANNED CHANGES. The permittee shall give notice to the Agency as soon as possible of any planned physical alterations or additions to the permitted facility. For a new hazardous waste management facility, the permittee shall not commence treatment, storage or disposal of hazardous waste; and for a facility being modified the permittee shall not treat, store or dispose of hazardous waste in the modified portion of the facility, until:
 - a. The permittee has submitted to the Agency by certified mail or hand delivery a letter signed by the permittee and a registered professional engineer stating that the facility has been constructed or modified in compliance with the permit; and
 - b. 1. The Agency has inspected the modified or newly constructed facility and finds it is in compliance with the condition of the permit; or
 - 2. If, within 15 days of the date of submission of the letter in paragraph (a), the permittee has not received notice from the Agency of its intent to inspect, prior inspection is waived and the permittee may commence treatment, storage or disposal of hazardous waste. (35 Ill. Adm. Codes 703.244 and 702.152(a))
- 15. ANTICIPATED NONCOMPLIANCE. The Permittee(s) shall give advance notice to the Agency of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements, regulations, or the Act. For a new facility, the permittee shall not treat, store or dispose of hazardous waste; and for a facility being modified, the permittee shall not treat, store or dispose of hazardous waste in the modified portion of the facility, except as provided in Section 703.280, until:
 - i. The permittee has submitted to the Agency by certified mail or hand delivery a letter signed by the permittee and a registered professional engineer stating that the facility has been constructed or modified in compliance with the permit; and

ii. Either:

- a. The Agency has inspected the modified or newly constructed facility and finds it is in compliance with the conditions of the permit; or
- b. Within 15 days after the date submission of the letter in section i above, the permittee has not received notice from the Agency of its intent to inspect, the permittee may commence treatment, storage or disposal of hazardous waste.

(35 Ill. Adm. Codes 702.152(b) and 703.247)

- 16. TRANSFER OF PERMITS. This permit is not transferable to any person except after notice to the Agency. The Agency may require modification of the permit to change the name of the permittee and incorporate such other requirements as may be necessary under the appropriate Act. (See 35 Ill. Adm. Codes 703.260 and 703.270, in some cases modification is mandatory.) (35 Ill. Adm. Code 702.152(c)) The transferree shall submit any information the Agency shall request. The Agency determines whether the transferree is of sufficient good character.
- 17. MONITORING REPORTS. Monitoring results shall be reported at the intervals specified in the permit. (35 Ill. Adm. Code 702.152(d))
- 18. COMPLIANCE SCHEDULES. Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of this permit shall be submitted no later than specified in 35 Ill. Adm. Codes 702.162 and 702.152(e).

19. TWENTY-FOUR HOUR REPORTING.

- a. The Permittee(s) shall report to the Agency any noncompliance with the permit, regulations, the Act or any other matter which may endanger human health or the environment. Any such information shall be reported orally within 24 hours from the time the Permittee(s) becomes aware of the following circumstances. This report shall include the following:
 - i. Information concerning the release of any hazardous substance, agrichemical or pesticide that may cause harm to public drinking water supplies.
 - ii. Information concerning the release or discharge of any hazardous waste or of a fire or explosion at the HWM facility, which could threaten the environment or human health outside the facility.
- b. The description of the occurrence and its cause shall include:
 - i. Name, address, and telephone number of the owner or operator;
 - ii. Name, address, and telephone number of the facility;
 - iii. Date, time, and type of incident;
 - iv. Name and quantity of material(s) involved:

- v. The extent of injuries, if any;
- vi. An assessment of actual or potential hazards to the environment and human health outside the facility, where applicable; and
- vii. Estimated quantity and disposition of recovered material that resulted from the incident.
- c. A written submission shall also be provided within 5 days of the time the Permittee(s) becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance including exact dates and times and if the noncompliance has not been corrected; the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent recurrence of the noncompliance. The Agency may waive the five day written notice requirement in favor of a written report within fifteen days. (35 Ill. Adm. Codes 702.152(f) and 703.245(b))
- 20. OTHER NONCOMPLIANCE. The Permittee(s) shall report all instances of noncompliance not otherwise required to be reported under Standard Conditions 17, 18, and 19, at the time monitoring reports, as required by this permit, are submitted. The reports shall contain the information listed in Standard Condition 19. (35 Ill. Adm. Code 702.152(g))
- 21. OTHER INFORMATION. Where the Permittee(s) becomes aware that it failed to submit any relevant facts in the permit application, or submitted incorrect information in a permit application or in any report to the Agency, the Permittee(s) shall promptly submit such facts or information. (35 Ill. Adm. Code 702.152(h))
- 22. REPORTING REQUIREMENTS. The following reports required by 35 Ill. Adm. Code 724 shall be submitted in addition to those required by 35 Ill. Adm. Code 702.152 (reporting requirements):
 - a. Manifest discrepancy report: if a significant discrepancy in a manifest is discovered, the permittee must attempt to reconcile the discrepancy with the waste generator or transporter. If the discrepancy is not resolved within 15 days after receiving the waste, the permittee must immediately submit to the Agency a letter describing the discrepancy and attempts to reconcile it and a copy of the manifest or shipping paper at issue. (35 Ill. Adm. Code 724.172(b))

- Unmanifested waste report: The permittee must submit to the Agency within 15 days of receipt of unmanifested waste an unmanifested waste report on EPA form 8700-13B. (35 Ill. Adm. Code 724.176)
- c. Annual report: an annual report must be submitted covering facility activities during the previous calendar year. (35 Ill. Adm. Code 724.175)
- 23. SUBMITTAL OF REPORTS OR OTHER INFORMATION. All written reports or other written information required to be submitted by the terms of this permit shall be sent to:

Illinois Environmental Protection Agency Bureau of Land Planning and Reporting Section 2200 Churchill Road Post Office Box 19276 Springfield, Illinois 62794-9276

- 24. SIGNATORY REQUIREMENT. All permit applications, reports or information submitted to the Agency shall be signed and certified as required by 35 Ill. Adm. Code 702.126 and 702.151.
- 25. CONFIDENTIAL INFORMATION. Any claim of confidentiality must be asserted in accordance with 35 Ill. Adm. Code 702.103 and 161.
- 26. DOCUMENTS TO BE MAINTAINED AT FACILITY SITE. The Permittee(s) shall maintain at the facility, until closure is complete, the following documents and amendments, revisions and modifications to these documents:
 - a. Waste analysis plan as required by 35 Ill. Adm. Code 724.113(b) and this permit.
 - b. Personnel training documents and records as required by 35 Ill. Adm. Code 724.116(d) and this permit.
 - c. Contingency plan as required by 35 Ill. Adm. Code 724.153(a) and this permit.
 - d. Closure plan as required by 35 Ill. Adm. Code 724.212(a) and this permit.
 - e. Cost estimate for facility closure as required by 35 Ill. Adm. Code 724.242(d) and this permit.
 - f. Operating record as required by 35 Ill. Adm. Code 724.173 and this permit.

- g. Inspection schedules as required by 35 Ill. Adm. Code 724.115(b) and this permit.
- 27. WASTE MINIMIZATION. The Permittee(s) shall certify at least annually that the Permittee(s) has a program in place to reduce the volume and toxicity of hazardous waste that he generates to the degree determined by the Permittee(s) to be economically practicable, and the proposed method of treatment, storage, or disposal is that practicable method currently available to the Permittee(s) which minimizes the present and future threat to human health and the environment, in accordance with 35 Ill. Adm. Code 724.173(b)(9).

GENERAL FACILITY STANDARDS

- 28. NOTICE OF WASTE FROM A FOREIGN SOURCE. The permittee who has arranged to receive hazardous waste from a foreign source must notify the Agency in writing at least four weeks in advance of the date the waste is expected at the facility. (35 Ill. Adm. Code 724.112(a))
- 29. NOTICE OF WASTE FROM OFF-SITE. The Permittee(s) who receives hazardous waste from an off-site source (except where the Permittee(s) is also the generator), must inform the generator in writing that the permittee has the appropriate permits for, and will accept, the waste the generator is shipping. The Permittee(s) must keep a copy of this written notice as part of the facility operating record. (35 Ill. Adm. Code 724.112(b))
- 30. GENERAL WASTE ANALYSIS. The Permittee(s) shall comply with the procedures described in the approved waste analysis plan. (35 Ill. Adm. Code 724.113)
- 31. SECURITY. The Permittee(s) shall comply with the security provisions of 35 Ill. Adm. Code 724.114(b) and (c).
- 32. GENERAL INSPECTION REQUIREMENTS. The Permittee(s) shall follow the approved inspection schedule. The Permittee(s) shall remedy any deterioration or malfunction discovered by an inspection as required by 35 Ill. Adm. Code 724.115(c). Records of inspections shall be kept at the facility as required by 35 Ill. Adm. Code 724.115(d).
- 33. PERSONNEL TRAINING. The Permittee(s) shall conduct personnel training as required by 35 Ill. Adm. Code 724.116 and shall maintain training documents and records as required by 35 Ill. Adm. Code 724.116(d) and (e).
- 34. GENERAL REQUIREMENTS FOR IGNITABLE, REACTIVE, OR INCOMPATIBLE WASTE. The Permittee(s) shall comply with the requirements of 35 Ill. Adm. Code 724.117.

PREPAREDNESS AND PREVENTION

- 35. DESIGN AND OPERATION OF FACILITY. The Permittee(s) shall maintain and operate the facility to minimize the possibility of fire, explosion, or any unplanned sudden or non-sudden release of hazardous substance, agrichemical, or pesticide to air, soil, or surface water which could threaten human health or the environment. (35 Ill. Adm. Code 724.131) Additionally, the Permittee(s) shall remediate any release of a hazardous substance, agrichemical or pesticide.
- 36. REQUIRED EQUIPMENT. The Permittee(s) shall equip the facility with the equipment set forth in the approved contingency plan, as required by 35 Ill. Adm. Code 724.132.
- 37. TESTING AND MAINTENANCE OF EQUIPMENT. The Permittee(s) shall test and maintain the equipment specified in condition 36 as necessary to assure its proper operation in time of emergency. Such testing and maintenance activities are set forth in the approved inspection schedule. (35 Ill. Adm. Code 724.133)
- 38. ACCESS TO COMMUNICATIONS OR ALARM SYSTEM. The Permittee(s) shall maintain access to the communications or alarm system as required by 35 Ill. Adm. Code 724.134.
- 39. REQUIRED AISLE SPACE. The Permittee(s) shall maintain aisle space as required by 35 Ill. Adm. Code 724.135 and National Fire Protection Association (NFPA) requirements.
- 40. ARRANGEMENTS WITH STATE AND LOCAL AUTHORITIES AND EMERGENCY RESPONSE CONTRACTORS. The Permittee(s) shall attempt to make emergency response arrangements with State and local authorities and agreements with State emergency response teams and emergency response contractors and equipment suppliers as required by 35 Ill. Adm. Code 724.137. If State or local officials refuse to enter in preparedness and prevention arrangements with the Permittee, the Permittee(s) must document this refusal in the operating record.

CONTINGENCY PLAN

41. IMPLEMENTATION OF PLAN. The provisions of the contingency plan must be carried out by the Permittee(s) immediately whenever there is a fire, explosion or release of hazardous waste or hazardous waste constituents which could threaten human health or the environment (35 Ill. Adm. Code 724.151(b)). At a minimum, this includes any fire or explosion which occurs in an area where hazardous waste is being managed (treated, stored or disposed) (35 IAC 703.241). Within 15 days of any incident that requires

- implementation of the contingency plan, the owner or operator must submit a written report to the Agency as required by 35 Ill. Adm. Code 724.156(j).
- 42. COPIES OF PLAN. A copy of the contingency plan, including any revisions, must be maintained at the facility and submitted to all local police and fire departments, hospitals and state and local emergency response teams as required by 35 Ill. Adm. Code 724.153.
- 43. AMENDMENTS TO PLAN. The Permittee(s) shall review and immediately amend, if necessary, the contingency plan, as required by 35 Ill. Adm. Code 724.154.
- 44. EMERGENCY COORDINATOR. A trained emergency coordinator shall be available at all times in case of an emergency as required by 35 Ill. Adm. Code 724.155 and 724.156.

MANIFEST SYSTEM RECORD KEEPING AND REPORTING

- 45. MANIFEST SYSTEM. The Permittee(s) shall comply with the manifest requirements of 35 Ill. Adm. Code 724.171, 724.172 and 724.176.
- 46. OPERATING RECORD. The Permittee(s) shall maintain a written operating record at the facility in accordance with 35 Ill. Adm. Code 724.173.
- 47. ANNUAL REPORT. The Permittee(s) shall prepare and submit an annual report to the Agency prior to March 1st of each year in accordance with the requirements of 35 Ill. Adm. Code 724.175.

CLOSURE

- 48. PERFORMANCE STANDARD. The Permittee(s) shall close the facility as required by 35 Ill. Adm. Code 724.211 and in accordance with the approved closure plan.
- 49. AMENDMENT TO CLOSURE PLAN. The Permittee(s) must amend the closure plan whenever there is a change in the expected year of closure or whenever a change in the facility operation plans or facility design affects the closure plan pursuant to 35 Ill. Adm. Code 724.212(c).
- 50. NOTIFICATION OF CLOSURE. The Permittee(s) shall notify the Agency at least 45 days prior to the date it expects to begin closure. (35 Ill. Adm. Code 724.212(d))
- 51. TIME ALLOWED FOR CLOSURE. After receiving the final volume of hazardous waste, the Permittee(s) shall treat or remove from the site all hazardous waste and complete

- closure activities in accordance with the schedule(s) specified in the closure plan. (35 Ill. Adm. Code 724.213)
- 52. DISPOSAL AND/OR DECONTAMINATION OF EQUIPMENT. When closure is completed, the Permittee(s) shall decontaminate and/or dispose of all facility equipment and structures as required by the approved closure (35 Ill. Adm. Code 724.214) plan.
- 53. CERTIFICATION OF CLOSURE. When closure is completed, the Permittee(s) shall submit certification to the Agency in accordance with 35 Ill. Adm. Code 724.215 that the facility has been closed as specified by the approved closure plans.
- 54. COST ESTIMATE FOR FACILITY CLOSURE. The Permittee's original closure cost estimate, prepared in accordance with 35 Ill. Adm. Code 724.242, must be:
 - a. Adjusted for inflation either 60 days prior to each anniversary of the date on which the first closure cost estimate was prepared or if using the financial test or corporate guarantee, within 30 days after close of the firm's fiscal year.
 - b. Revised whenever there is a change in the facility's closure plan increasing the cost of closure.
 - c. Kept on record at the facility and updated. (35 Ill. Adm. Code 724.242)
 - d. Made immediately available to Agency personnel upon Agency request.
- 55. FINANCIAL ASSURANCE FOR FACILITY CLOSURE. The Permittee(s) shall demonstrate compliance with 35 Ill. Adm. Code 724.243 by providing documentation of financial assurance, as required by 35 Ill. Adm. Code 724.251, in at least the amount of the cost estimates required by the previous Permit Condition. Changes in financial assurance mechanisms must be approved by the Agency pursuant to 35 Ill. Adm. Code 724.243.
- 56. LIABILITY REQUIREMENTS. The Permittee(s) shall demonstrate continuous compliance with the requirements of 35 Ill. Adm. Code 724.247 and the documentation requirements of 35 Ill. Adm. Code 724.251.
- 57. INCAPACITY OF OWNERS OR OPERATORS, GUARANTORS, OR FINANCIAL INSTITUTIONS. The Permittee(s) shall comply with 35 Ill. Adm. Code 724.248 whenever necessary.

LAND DISPOSAL RESTRICTIONS

- 58. DISPOSAL PROHIBITION. Any waste identified in 35 Ill. Adm. Code Part 728, Subpart C, or any mixture of such a waste with non-restricted wastes, is prohibited from land disposal unless it meets the standards of 35 Ill. Adm. Code Part 728, Subpart D, or unless it meets the requirements for exemptions under Subpart C. "Land disposal" means placement in or on the land and includes, but is not limited to, placement in a landfill, surface impoundment, waste pile, injection well, land treatment facility, or vault intended for disposal.
- 59. DILUTION PROHIBITION. The Permittee(s) shall not in any way dilute a restricted waste or residual from treatment of a restricted waste as a substitute for adequate treatment in order to achieve compliance with 35 Ill. Adm. Code 728, Subpart D (35 Ill. Adm. Code 728.103).

60. WASTE ANALYSIS.

- a. The Permittee(s) must test his waste or extract developed, using the test method identified in Appendix I of 40 CFR Part 268, or use knowledge of the waste, to determine if the waste is restricted from land disposal.
- b. For any waste with treatment standards expressed as concentrations in the waste extract, the Permittee(s) must test the treatment residues or an extract of such residues developed using the test method described in Appendix I of 40 CFR Part 268, to assure that the treatment residues or extract meet the applicable treatment standard.
- c. If the treatment residues do not meet the treatment standards, or if the Permittee(s) ships any restricted wastes to a different facility, the Permittee(s) shall comply with the requirements applicable to generators in 35 Ill. Adm. Code 728.107 and 728.150(a)(1).

61. STORAGE RESTRICTIONS

a. The Permittee(s) shall not store hazardous wastes restricted from land disposal under 35 Ill. Adm. Code Part 728, Subpart C unless such wastes are stored only in containers or tanks, and are stored solely for the purpose of the accumulation of such quantities as is necessary to facilitate proper recovery, treatment, or disposal, and: (1) each container is clearly marked to identify its contents and the date each period of accumulation begins; (2) each tank is clearly marked to identify its contents, the quantity of each hazardous waste received, and the date each period of accumulation begins. In lieu of marking each tank with the required information, the Permittee may

maintain such information as part of the operating record of the facility (35 Ill. Adm. Code 728.150).

- b. The Permittee(s) must comply with the operating record requirements of 35 Ill. Adm. Code 724.173.
- 62. NEW DETERMINATIONS OF PROHIBITED WASTES. Wastes which are prohibited from land disposal under 35 Ill. Adm. Code Part 728, Subpart C, or for which treatment standards have been established under 35 Ill. Adm. Code 728, Subpart D, subsequent to the date of issuance of this permit, shall be subject to the conditions number 58 through 61 above.
- 63. DEFINITIONS. Within the scope of this permit "days" refers to calendar days unless otherwise specified.

SFN:WRW:bjh\051161s.doc

SECTION VII: MISCELLANEOUS UNIT

A. Summary

The Permittee may treat waste paints (including coatings, sealants, turpentine and mineral spirits used as paint thinner) identified by the hazardous waste codes D001 (ignitable) for characteristic, D004 through D008 for specific heavy metal toxics and D018 through D040 and D043 for specific organic toxics in the compactor located in Building 42:

The Permittee may shred full or partially full containers of waste, separate out the resulting metal container fragments and blend the container contents into pumpable slurries or non-disperable solids. The Permittee is prohibited from treating a hazardous waste in the shredder that has not been identified in Attachment A.

The Permittee may crush lamps identified by the hazardous waste codes D003 (reactive) for characteristic, D005, D006, D008 and D009 for specific heavy metal toxics in the lamp crusher located in Unit 25.

The Permittee may either install and operate the compactor or the shredder but not both units. If the Permittee installs one of the previously mentioned units and wishes to remove the unit and replace with the other unit, the replaced unit must undergo closure.

Miscellaneous Unit	Permitted Capacity	Unit Description
Compactor in Building 42	2 drums/hour @ 55 gallon/drum ~18,000 lbs/day	Main compartment 44.25" x 27" x 57". The compacter is shown on DWG 4281 of the approved permit application.
Shredder in Unit 24	maximum capacity 48,000 lbs. per hour	The shredder is shown on DWGs 4286 and 4288, operating descriptions, manufacturer's literature are included in Appendix D-43 of the approved permit application.
Lamp Crusher in Unit 25	2300 lbs/hr or 4000 lamps/hr	12' x 30' x 11'. The unit is shown and operating procedures discussed in Appendix D-60 of the approved permit application.

B. Operating Conditions

- i. The Permittee may operate the compactor identified in Condition VII.A under the following conditions:
 - 1. The closed vent system and carbon adsorption system shall be operated at all times when the unit is in use.
 - 2. The unit must be operated in compliance with the Clean Air Act and permit 96100095 issued by the Illinois EPA Bureau of Air, and any subsequent permits authorizing the operation of this unit.
 - 3. The Permittee is prohibited from processing waste in the compactor, if processing of the waste would cause a fire or explosion in the unit or a release to the environment.
 - 4. After completing development and installation of the unit and associated area (i.e., the compactor, the secondary containment system) the Permittee shall notify the Field Operation Section (FOS) and Permit Section prior to placing the unit into operation. Operation is allowed upon verbal approval from FOS or 15 days after notifying FOS the unit is operational unless deficiencies are noted during the inspection.
 - 5. The compactor shall not be operated unless the fire system (sprinkler) is operable in Building 42.
- ii. The Permittee may operate the shredder identified in Condition VII.A under the following conditions:
 - 1. The unit shall not be operated unless the concentration of oxygen in the air within the unit is between 4 and 8%.
 - 2. The unit shall not be operated when the carbon dioxide fire suppression system is not operable.
 - 3. The unit shall not be operated when the deflagration system is not operable.
 - 4. The unit shall not be operated when the carbon adsorption system is not operating or collection drums/hoppers are not in place beneath the shredder outlet.

- 5. The unit shall not be operated if the tank high level alarm on TK-414 has been activated and has not reset.
- 6. The closed vent system and carbon adsorption shall be operated at all times when the unit is in use.
- 7. The unit shall not be operated when the foam suppression system is inoperable.
- 8. The unit must be operated in compliance with the Clear Air Act and permit number 96100095 issued by the Illinois EPA Bureau of Air, and any subsequent permits authorizing the operation of this unit.
- iii. The Permittee may operate the lamp crusher identified in Condition VII.A under the following conditions:
 - 1. The unit must be operated in compliance with the Clean Air Act and the construction permit number 04060084 issued by the Illinois EPA Bureau of Air, and any subsequent permits authorizing the operation of this unit.
 - 2. The contingency plan must be implemented unless the spill or leak is less than or equal to one pound in quantity and immediately contained and cleaned up.
 - 3. The unit must run for 10 minutes following lamp processing.
 - 4. Each drum of co-products shall be visually inspected daily for signs of cross-contamination to ensure the unit is operating correctly. The Permittee shall cease operation of the lamp crusher if signs of cross-contamination are present. Operation of the lamp crusher shall not resume until the cause of the cross-contamination is remediated.
 - 5. The Permittee shall not operate the lamp crushing unit unless the mercury monitor for the workplace is operating.
 - 6. The mercury concentration in stack emission shall be monitored daily and the work place air quality monitored continuously.
 - 7. The Permittee shall determine the mercury concentration in the air at the inlet and outlet points of the carbon units, each operating day to ensure breakthrough has not occurred. The Permittee shall replace the activated carbon with new carbon within 24 hours if monitoring indicates the control device did not reduce the total mercury content of the inlet stream by 95%.

- 8. The Permittee shall not operate the lamp crushing unit unless the vapor collection system on the unit is operable. The Permittee shall operate the lamp crushing unit under negative pressure.
- 9. The Permittee shall not operate the lamp crushing unit in a manner that allows the ambient air mercury vapor concentration (work place) to exceed 0.05 mg/m³ based on a 10-hour time weighted average [TWA].
- 10. The Permittee shall not operate the lamp crushing unit in a manner that allows the ambient air mercury vapor concentration (work place) to exceed 0.1 mg/m³ at any time (based on an instantaneous reading).
- 11. The Permittee shall require personnel to wear at least a cartridge respirator (Mersob-P100 cartridges or equivalent) and ear protection when the unit is operating.
- iv. The Permittee shall not operate the compactor and shredder if the unit does not comply with the following conditions:
 - 1. The Permittee shall operate the closed vent system with no detectable emissions, as indicated by an instrument reading of less than 500 ppmv above background as determined by the procedures in 40 CFR 264.1034(b).
 - 2. The Permittee shall replace the activated carbon with new carbon within 24 hours if monitoring indicates the control device did not reduce the total organic content of the inlet vapor stream by 95%.
 - 3. The Permittee shall maintain negative pressure in the closed vent system during operation.
 - 4. The Permittee shall limit periods of planned routine maintenance of the control device during which the control devices does not meet the performance standard, to less than 240 hours per year.
 - 5. If the control device malfunctions, the Permittee shall correct the device as soon as practicable (no later than 24 hours) after the occurrences in order to minimize excess emissions of air pollutants.
 - 6. Before the unit becomes operational the Permittee shall conduct an initial leak detection test in accordance with 40 CFR 264.1034(b).

C. Recording and Maintaining Data

- 1. The Permittee shall record monitoring and inspection data in the operating record and maintain those records for three years. The Permittee shall make this information available to the Illinois EPA upon request.
 - i. The Permittee shall conduct monitoring on the Shredder and Compactor in accordance with the following conditions:
 - 1. The Permittee shall conduct hourly monitoring of the flow indicator sensor of the vent stream flow in the closed vent system. The information shall be recorded in the facilities operating record.
 - 2 The Permittee shall maintain records of the installation and replacement of the carbon filters.
 - The Permittee shall maintain daily recordings of each flame ionization detector (FID) test to demonstrate compliance with the performance standard.
 - 4 The Permittee shall maintain the date and time of the periods of routine maintenance when routine maintenance of the control device does not meet the performance standard.
 - ii. The Permittee shall monitor the Lamp Crusher in accordance with the following conditions:
 - 1. The Permittee shall maintain records of the date and time when carbon filters are installed and removed.
 - 2. The Permittee shall maintain records of the mercury concentration in the work place and in the stack.

D. <u>Performance Standard</u>

The Permittee shall not operate the units identified in Condition VII(A) unless the performance standard is met. The performance standard used to determine compliance is reduction of the total organic content or mercury content of the inlet stream by 95%.

E. Inspections

- 1. Closed-vent system joints, seams or other connections shall be visually inspected annually for defects which could result in air emissions.
- 2. The pressure measurement device shall be inspected daily, when the unit is in operation, to verify that negative pressure is being maintained in the closed vent system when operating.
- 3. The Permittee shall inspect the miscellaneous unit in accordance with the inspection schedule specified in Attachment B to this permit.

F. Response to Leaks or Spills (Liquid or Solid)

In the event of a leak or a spill from the miscellaneous units which is not immediately cleaned up, or if a unit becomes unfit for continued use, the Permittee shall remove the system from service immediately and complete the following actions:

- 1. Appropriate action to clean up any release of waste from the miscellaneous unit shall be carried immediately after removing the system from system.
- 2. Remove all waste from the system within 24 hours of the detection of the leak or spill to prevent further releases and to allow inspection and repair of the system.
- 3. Determine the cause of the release.
- 4. Make any necessary repairs to fully restore the integrity of the system before returning the unit to service.
- 5. All wastes resulting from the cleanup of a spill or leak shall be managed as a hazardous waste.

G. Response to Leaks or Spills (Detectable Emissions) Organic

1. Detectable emissions, shall be controlled as soon as practicable, but not later than 15 calendar days after the emission is detected, or, if applicable, as allowed by 35 Ill. Adm. Code 724.934(1)(3)(iii), no later than the scheduled routine maintenance.

2. A first attempt at repair shall be made no later than 5 calendar days after the emission is detected.

H. Special Requirements for Ignitable or Reactive Waste

1. The Permittee shall take precautions to prevent accidental ignition or reaction of ignitable waste.

Ignitable wastes must be separated and protected from sources of ignition or reaction including but not limited to:

- a. Open flames, smoking, cutting and welding, hot surfaces, frictional heat, sparks (e.g., static, electrical, or mechanical), spontaneous ignition (e.g., from heat producing chemical reactions), and radiant heat.
- b. While ignitable waste is being handled, the Permittee must confine smoking and open flame to specially designated locations.
- c. "No Smoking" signs must be conspicuously placed wherever there is a hazard from ignitable waste.

I. Residues

1. A sample shall be taken of each drum of collected residue from the miscellaneous unit (compactor). A composite sample made from the individual samples collected from ten drums shall be analyzed for PCB's. If PCB's are detected, the individual drums shall be analyzed to discover the source of the PCB's. If the analysis shows that the concentration is greater than 50 ppm in a drum or drums, that waste must be handled as a TSCA waste. Otherwise, the waste must be handled under the RCRA regulations as a hazardous waste.

J. Waste Analysis

Compatibility of waste to be processed through the compactor shall be assessed by performing a liquid waste compatibility test as described in the letter dated September 17, 1993 from Paul Ahearn, CHCI. The compatibility of wastes received in Lab Packs may be assessed using EPA-600/2-80-076, "A Method for Determining the Compatibility of Hazardous Wastes".

K. General Construction Requirements

- 1. The Permittee(s) is authorized to construct the proposed Miscellaneous Units identified in Sections VII.A of this permit. The units may only be constructed in accordance with the approved Permit Application, subject to the following modifications.
 - a. Within thirty days after completing construction and prior to the units being operated, the Permittee(s) shall submit to the Illinois EPA a Construction Certification Report from a qualified, registered professional engineer, stating that the unit meets the requirements of 35 Ill. Adm. Code 724.701. This report shall contain the information required in Attachment C to this permit.
 - b. The Permittee(s) may not operate the unit until the Construction Certification Report is approved.

L. Closure

At closure, all waste and waste residues must be removed from the miscellaneous units. Closure of the miscellaneous units shall be carried out in accordance with the closure plan in the approved Permit Application, subject to the following modifications:

- 1. The Permittee(s) shall notify the Illinois EPA's Bureau of Land in writing of its intent to close these units at least 180 days prior to the date closure is expected to begin. Along with the notification, the Permittee(s) shall submit the sampling and analysis plan to be used in demonstrating that these areas have been properly decontaminated. The plan shall be approved by the Illinois EPA's Bureau of Land in writing prior to being implemented. Illinois EPA's review of this plan will be subject to the permit appeal provisions contained in Section 39(a) and Section 40(a) of the Act. The response from the Illinois EPA shall approve and establish:
 - a. The sampling plan;
 - b. What contaminants must be analyzed for; and
 - c. The level at which decontamination is considered complete.
- 2. The concrete surfaces underlying the miscellaneous units shall be visually inspected, photographed and any residue adhering to the surface must be removed by scraping and/or brushing. Following this, the concrete surfaces must be steam cleaned and

triple rinsed. All wash water and rinse water shall be collected and managed as a hazardous waste, unless the Permittee(s) can document that the waste is not hazardous as defined in 35 Ill. Adm. Code 721.103. An independent, registered, professional engineer must certify that the surface has no cracks, gaps or other defects which would allow waste to migrate through to the underlying soil. Otherwise, sampling in accordance with an approved sampling plan, shall be conducted to verify the underling soil is uncontaminated.

- 3. All sweepings, wash water and rinsate generated during the closure of these units shall also be managed as a hazardous waste, unless it can be shown to be exempt under 35 Ill. Adm. Code Part 721.
- 4. The Permittee shall provide post-closure care in accordance with 35 Ill. Adm. Code Part 724 if all of the hazardous wastes or contaminated soils cannot be practicably removed or decontaminated in accordance with the closure requirements outlined in this permit and in the approved closure plan. If it is determined that the closure requirements cannot be met and post-closure care is required, the miscellaneous units shall be considered to be a landfill and the post-closure care plan in the approved application will be modified as required to provide adequate post-closure care for the affected units in accordance with 35 Ill. Adm. Code, Subtitle G, Part 724, Subparts G and H.
- 5. Should post-closure care, as described in Condition 4 above, become necessary, the Permittee shall submit an application for modification to this permit, including an amended closure plan and post-closure care plan for the affected units within thirty (30) days following discovery that clean closure cannot be accomplished. If a determination is made not to pursue clean closure prior to the implementation of the closure plan for the miscellaneous units, the modification request shall be made no later than sixty (60) days after the determination is made.
- 6. Financial assurance for closure and post-closure of any miscellaneous unit being closed as a landfill, when required in accordance with Conditions 4 and 5 above, shall be updated within thirty (30) days following modification of the permit under the provisions of Condition 5 above.
- 7. Within sixty (60) days after closure of any miscellaneous unit is complete, the Permittee shall submit certification to the Illinois EPA that the unit has been closed in accordance with the approved closure plan. The closure certification form in Attachment D to this permit or a certification with identical wording must be used. Signatures must meet the requirements of 35 Ill. Adm. Code Section 720.126. The independent engineer should be present at all critical, major points (activities) during

the closure. These might include soil sampling, soil removal, backfilling, final cover placement, etc. The frequency of inspections by the independent engineer must be sufficient to determine the adequacy of each critical activity. Financial assurance must be maintained for each tank system identified in Condition B.1 above. Documents regarding financial assurance for closure of this facility may be modified after the Illinois EPA approves the closure certification for any or all of the miscellaneous units. The Illinois EPA's review of closure certifications for partial or final closure will be reviewed in accordance with 35 Ill. Adm. Code 724.243.

A Closure Documentation Report is to be submitted with the closure certification which includes the following items, if applicable:

- a. The volume of waste and waste residue remove, including wastes generated during documentation procedures;
- b. A description of the method of waste handling and transport;
- c. Copies of the waste manifest;
- d. A description of the sampling and analytical methods used;
- e. A chronological summary of closure activities and the cost involved;
- f. Tests performed, methods and results;
- g. Color photographs of closure activities which document conditions before, during and after closure; and
- h. A scale drawing of all excavated or decontaminated areas and sample locations.
- 8. To avoid creating another regulated storage unit during closure, it is recommended that you obtain any necessary permits for waste disposal prior to initiating excavation activities. If it is necessary to store excavated hazardous waste on-site prior to off-site disposal, do so only in containers or tanks for less than ninety (90) days. Do not create regulated waste pile units by storing the excavated hazardous waste in piles. The permit exemption (35 Ill. Adm. Code 722.134) only applies to container and tanks.
- 9. Under the provisions of 29 CFR 1910 (51 FR 15,654, December 19, 1986), cleanup operations must meet the applicable requirements of OSHA's Hazardous Waste Operations and Emergency Response standard. These requirements include hazard communication, medical surveillance, health and safety programs, air monitoring,

decontamination and training. General site workers engaged in activities that expose or potentially expose them to hazardous substances must receive a minimum of 40 hours of safety and health training off site plus a minimum of three days of actual field experience under the direct supervision of a trained experienced supervisor. Managers and supervisors at the cleanup site must have at least an additional eight hours of specialized training on managing hazardous waste operations.

- 10. If the Illinois EPA determines that implementation of this closure plan fails to satisfy the requirements of 35 Ill. Adm. Code, Section 724.211, the Illinois EPA reserves the right to amend the closure plan. Revisions of closure plans are subject to the appeal provisions of Section 40 of the Act.
- 11. The Permittee shall analyze all samples individually (i.e., no composting). Sampling and analytical procedures shall be conducted in accordance with the latest edition of SW-846 and Attachment G to the Illinois EPA's closure plan instruction package. Sample size per interval shall be minimized to prevent dilution of any contamination. Apparent visually contaminated material within a sampling interval shall be included in the sample portion of the interval to be analyzed. To demonstrate a parameter is not present in a sample, analysis results must show a detection limit at least as low as the PQL for that parameter as identified in the latest edition of SW-846.

SFN:MAS:bjh\051161s.doc

Section VIII: Special Conditions

A. WASTE ANALYSIS

- 1. All hazardous waste blended into a fuel to be burned for energy recovery must have a heating value of at least 5,000 BTU/lb. This requirement may be superseded if Clean Harbors provide documentation to the Agency that all facilities which receive the waste fuel have a certification of compliance based on Clean Harbor's specification.
- 2. The Permittee(s) shall document the receipt of each load of waste at that site in the operating record. The results of any analyses and any supplemental analyses performed on any received waste shall also be placed in the operating record.
 - a. If manifest discrepancies are encountered, the procedures used to reconcile the discrepancy shall be included in the operating record;
 - b. If a manifest discrepancy is not resolved within (15) days after receiving the waste, the Permittee(s) must immediately submit a letter to the Agency's Bureau of Land, describing the discrepancy and attempts to reconcile it and a copy of the manifest or shipping paper at issue.
- 3. Used oil which is received at this facility for blending into a fuel program or re-refining is subject to a TCLP analysis unless an analysis (by EPA Method 9077) shows total halogens is less than 1000 ppm or an adequate rebuttal is made. Used oil destined for other uses besides a fuel program or re-refining (e.g., disposal, road application) are subject to the full TCLP requirements.

4. Storage

Before any waste other than lab packs or wastes with no free liquids are placed into a storage unit, facility management will assess the compatibility of the waste with the storage unit materials of construction and with wastes already stored therein.

- a. Containerized storage compatibility will be assessed by performing a Liquid Waste Compatibility Test as described in Appendix C-6 of the approved permit renewal application.
- b. Tank Farm Compatibility will be assessed by performing a Liquid Waste Compatibility Test on the liquid received for bulk storage with a composite

sample of the tanks within the containment system to which the new waste will be added.

The referenced procedure, Liquid Waste Compatibility Test D5058A, is described in the following publication "Annual Book of ASTM Standards", American Society for Testing Materials, 1916 Race Street, Philadelphia, PA 19013, most recent edition.

The test shall be conducted in the following manner, a 100 ml. proportional composite shall be made of the existing inventory in the storage area. A 5 ml. sample of the composite shall be mixed with a 5 ml. sample of the incoming waste to determine a compatibility. If no reaction is observed, 5 ml. of the incoming waste is added to the larger (remaining 95 ml.) composite in preparation for testing the next sample.

5. Each bulk shipment will be visually inspected and sampled to verify that the contents match the pre-acceptance description of the waste.

In the case of container shipments, each container in the shipment will be visually inspected by obtaining a full depth vertical sample to verify that the contents match the pre-acceptance physical description of the waste. Full vertical depth samples are not required in cases of hardened solids.

The Permittee(s) shall determine visual characteristics (color, obvious viscosity or lack thereof, phase character, odor,...) which are appropriate to each stream to aid in determining if the physical appearance of the waste received conforms to the description of the waste when initially evaluated. Changes in the visually determined characteristics require contacting the generator to reconcile the discrepancies. If the discrepancies cannot be reconciled this is a new waste which requires performing a pre-qualification analysis to fully evaluate its compatibility to the facility's operation.

- 6. The permittee is prohibited from receiving the following types of wastes under this permit:
 - a. radioactive material as defined by 49 CFR 173.403(y);
 - b. source, special nuclear, or by-product material as defined by the Atomic Energy Act of 1954;
 - c. Potentially Infectious Medical Waste (PIMW);
 - d. Municipal waste;
 - e. Construction or demolition waste; or

- f. Asbestos waste unless the waste complies with 61 CFR 145(c)(6) or is non-friable asbestos waste.
- 7. All trucks and containers that are shipped to the CHSI facility shall be sampled within 14 days of the date that they arrive at the facility.
- 8. Waste prequalification procedures may be waived and the permittee is authorized to accept hazardous and non-hazardous waste materials generated from off-site emergency response actions when the following conditions have been met:
 - a. an incident number has been issued for the emergency event,
 - b. the Agency's Emergency Response Unit (ERU) has determined that the incident is an immediate threat to human health or the environment, and,
 - c. ERU has approved the request to ship the waste to the permittee's facility.

A full analysis of the waste pursuant to the facilities Waste Analysis Plan shall be conducted once the shipment reaches the permittee's facility.

B. REPORTING REQUIREMENTS

1. Any incident which requires implementation of the contingency plan shall be recorded in the facilities operating record in an incident log which is maintained separate from the facilities other operating records. The incident log must include a copy of each incident report. In addition to the information identified in the approved application, the incident report must include, at a minimum, the waste management units involved in the incident, the cause of the release, measures taken to correct the situation and prevent a reoccurrence.

C. GENERAL OPERATING REQUIREMENTS

- 1. The permittee is prohibited from conducting any waste management activities outside the permitted boundaries of this facility without a permit modification and proof of compliance with Section 3.32 and Section 39(c) of the Act. Waste management includes storage, staging, treatment, sampling or all other activities not associated with transportation of waste.
- 2. The permittee shall not accept waste which has not been properly characterized in accordance with 35 Ill. Adm. Code 722.111.

- 3. The permittee shall not vent oxygen in Building 25 when containers of flammable materials are open or in the process of being moved, consolidated or sampled.
- 4. The permittee is allowed to vent the following compressed gas cylinders in Building 25 which contain only Carbon Dioxide, Nitrogen, Oxygen, Krypton, Argon, Neon, Helium, Xenon or Air.
- 5. The permittee shall cease venting of inert gases, and carbon dioxide if the oxygen concentration drops below 19.5% in Building 25.
- 6. The permittee shall cease venting of oxygen if the oxygen concentration reaches 23.5% in Building 25.
- 7. The phone carried by the emergency coordinator shall be checked during shift changes to ensure that it functions properly.

D. CONSTRUCTION REQUIREMENTS

- 1. The proposed hazardous waste management units must be constructed in accordance with the approved permit application and the Part B permit. Modification to the tank systems or tank or container secondary containment systems, including changes to physical dimensions or materials of construction, are subject to the permit modification requirements prior to construction. Changes in structural members or foundation design which are completed prior to the operation of the hazardous waste management unit and have been certified by the Illinois licensed structural engineer of record are not subject to the permit modification requirements provided the changes are made solely to maintain the structural integrity of the unit.
- 2. The Permittee(s) shall provide the concrete slab, the curbs and the walls that are used as part of the containment for the unloading areas with an impermeable surface coating that:
 - a. is compatible with the waste, or any other liquid, stored in the containment system; and
 - b. will prevent migration of the waste into the concrete of the slab or wall.
 - c. The Permittee(s) shall install a compatible caulking or sealant at each existing joint in the secondary containment system of the unloading areas to make the joint liquid tight. These joints include but are not limited to, all construction joints within the slab, walls and curbs and joints between the slab and curb,

between two curbs, between the slab or curb and wall and joints between two walls. The caulking or sealant shall be compatible with the stored waste, or any other liquid, stored in the same containment system with the hazardous waste. The coatings, caulking and/or sealant shall be applied prior to placing wastes in the units. Within thirty days after providing a coating/sealant to render the base impervious to wastes and precipitation, the Permittee(s) shall submit to the Agency a certification from an Illinois Registered Professional Engineer attesting to this fact. The certification shall contain the information described in Attachment C.

d. Clean Harbors shall perform a complete inspection of the surface coating yearly in the unloading areas and perform annual maintenance to insure the integrity of the coating.

E. CONTINGENCY PLAN

- 1. The Agency's Bureau of Land Field Office (Maywood) shall be notified within 24 hours of implementing the contingency plan unless the spill or leak is less than or equal to one pound in quantity and immediately contained and cleaned up. The contingency plan must be implemented whenever there is a fire, explosion or spill which involves hazardous waste or hazardous waste constituents which occurs in areas where hazardous waste is treated or stored. This includes spills within a containment system. A spill is any release of material outside the permitted unit, into or outside of the containment system. A spill shall not include controlled accumulation of hazardous waste in small containment devices (e.g., bucket, drip pan (but does not a include sump or the primary secondary containment unit)) used to collect and control the release of waste during routine processing or maintenance activities such as draining hoses or disassembling and repairing a pump.
- 2. The Permittee(s) shall contact the local emergency response entities immediately after implementation of the contingency plan unless the spill is less than quantity specified in the air modeling at 100 meters and it is immediately contained and cleaned up. The model spill volume may be adjusted without further modeling if an actual analyses of the waste on-hand is available. That is, the model spill volume may be multiplied by the inverse of the concentration (by weight percent) of the compound in question. This calculated spill volume would then be used to determine if the spill has a potential to impact areas off-site.
 - a. The entities which must be notified include:
 - 1. Chicago Police Department;

- 2. Chicago Fire Department;
- 3. The Agency Field Office (Maywood);
- 4. The Illinois Emergency Management Agency (IEMA);
- 5. The National Response Center;
- 6. The Local Emergency Planning Committee; and
- 7. The Metropolitan Water Reclamation District of Greater Chicago.
- b. The information which must be initially relayed to each entity includes:
 - 1. The type of emergency (release, fire or explosion);
 - 2. The type of wastes involved in the emergency and the approximate quantity involved; and
 - 3. An initial assessment of the conditions at the site; and whether outside help is needed to properly respond to the situation.
- c. If the Permittee(s) is able to properly respond to the emergency without any aid from the entities identified in Condition 2.a above, the Permittee(s) shall notify each of these entities that the emergency situation no longer exists once all required emergency response and cleanup activities have been completed.
- 3. The Permittee shall provide applicable local emergency response entities with changes/modifications to the contingency plan and offer to meet and review the plan on an annual basis. Copies of the meeting notes and list with attendees shall be placed in the facility's operating record and be available to the Illinois EPA for review upon verbal or written request.

F. MISCELLANEOUS

- 1. The permittee is prohibited from performing hazardous waste management activities that are not specifically identified in this permit.
- 2. All used oil which contains greater than 1,000 ppm halogens and cannot be adequately rebutted are hazardous wastes and must be managed as a listed hazardous waste (i.e., the oil cannot be processed into an on-specification or off-specification used oil fuel).

- 3. All wastes dewatered by portable pumps must be analyzed by the paint filter test. Wastes which fail will still retain the characteristic of corrosivity.
- 4. Water reactive solids shall not be stored in the Bulk Solids Storage Area (Unit B).
- 5. The following activities are not permitted:
 - a. The treatment of characteristic (D002 only) oil within Processing Building #2 (Unit G); and
 - b. The bulking of hazardous wastes (which do not contain free liquids) within Process Building #2 (Unit G).
- 6. All waste stored in RCRA area must be managed as a RCRA waste. For example, it must be tested for compatibility and considered part of the volume limit.

G. LISTED WASTE TREATMENT

Stabilization

- 1. The stabilization area (Unit Z) cannot accept wastes containing over 2% (by weight) of mercury.
- 2. The stabilization area (Unit Z) cannot stabilize wastes containing parameters above land ban restrictions whose BDAT as identified in the Federal Register is not based on stabilization (i.e., cyanide, organics, etc.). Attachment A identifies acceptable codes of wastes which may be stabilized that have hazardous constituents above their maximum specified LDR limit.
- 3. Workers inside Process Building No. 3 (Unit Z) must wear respirators which are designs to remove particulates (HEPA) and organic compounds from the air they breathe. In addition, the workers must be equipped as necessary, to meet the applicable requirements of OSHA.
- 4. The following items shall be documented in the operating record for the Waste Stabilization Facility (Unit Z) regarding each load of waste received for stabilization/solidification:
 - a. Time and date that each waste load is received;
 - b. Permit number and manifest number associated with the waste;



- c. Waste name, generator name and location (including the USEPA and IEPA identification number);
- d. Volume of waste received;
- e. Identification of the receiving bay where the incoming waste is placed;
- f. Information pertaining to the actual treatment process, including:
 - i. The time and date when each waste load is treated at the mixing unit;
 - ii. The amount of material added to the waste in the mixing unit (mass per mass or mass per volume basis);
 - iii. Length of time treated waste "cures" before being subjected to the paint filter test, the penetrometer test and any additional tests;
 - iv. Results of the paint filter test; the penetrometer test, if applicable; and
 - v. All analytical results obtained in evaluating the stabilization achieved during treatment of the waste as required in.
- g. The results of the initial treatability study/development of the treatment recipe.
- 5. The areas where waste is handled within the stabilization building (Unit Z) (unloading area, mixing area, loading area, areas trafficked in transporting waste to and from the mixing unit (i.e., mixing box or mixing equipment)) shall be inspected each time after a mixing unit is either filled or emptied. Any waste residue observed on the floor shall be cleaned up immediately. Any spills which occur during the treatment process or during the movement of waste within the facility shall be responded to immediately in accordance with the contingency plan. Documentation of each inspection and spill incident shall be placed in the operating record.
- 6. The areas heavily trafficked during transport of waste to and from the mixing unit shall be cleaned at the end of each eight hour operating shift as time and circumstances allow in accordance with the following procedures:
 - a. Operation of the stabilization facility (Unit Z) shall cease during the required cleanup activities;

- b. The areas of concern shall be cleaned through use of a pressure washer or steam cleaner. Wastewater generated during this activity shall be directed to the collection sump.
- c. All washwater which collects in the sump shall be removed prior to resuming operation; and
- d. Documentation of the cleaning activities shall be placed in the operating record of this facility.
- 7. The mixing unit (i.e., the waste feed hoppers, the mixers, and all associated waste transfer appurtenances) or mixing boxes shall be completely emptied (i.e., as much waste as possible shall be removed) prior to placing a waste in the unit which is subject to different land disposal restrictions than the waste that was previously in the unit. The mixing unit mixing box will be considered empty when it contains no more than 3% (by weight) of the waste that was initially in the unit. Documentation of this cleaning effort shall be placed in the operating record for the facility.
- 8. Treated waste subject to the land disposal restrictions of 40 CFR 268 and/or 35 Ill. Adm. Code 728 shall be managed in accordance with the following procedures:
 - a. The treated waste shall not be placed in a landfill disposal unit until it has been demonstrated that the applicable restrictions are met.
 - b. Until such time as the analyses necessary to demonstrate compliance with these restrictions are completed, the treated waste shall be stored. Wastes subject to different land disposal restrictions shall be segregated from each other prior to, during and after treatment until it is demonstrated that the wastes have each passed the treatment standards applicable to that waste.
 - c. The container or tank may contain waste generated over more than one day of operation.
 - d. Once the samples required for the demonstration have been obtained, no new wastes may be added to the container(s) and a new container(s) for the waste of concern must be started.
 - e. The demonstration shall be carried out in accordance with the steps listed below:
 - i. To comply with the initial demonstration of documenting the facility's ability to treat a particular waste code. A representative sample shall be collected from the first twenty (20) roll-off boxes and an analyses

performed to demonstrate compliance with parameters specific to the Land Disposal Restrictions (LDR) for the pertinent waste code. The results of the sampling (before and after) shall be submitted to this Agency within 30 days after the completion of the analysis of the samples.

- ii. Once a facility has demonstrated its ability to meet the LDR standards for a particular code, the Permittee(s) may reduce the sampling frequency to the first and last batches, respectively, in any group of containers for which compliance is to be determined.
- iii. If the treatment standard for any of the constituents is exceeded:
 - a. Treated waste which fails to meet the requirements shall receive additional treatment (this may consist of additional curing time, reintroduction into the treatment facility for further stabilization or transfer to another facility for additional treatment).
 - b. In no event shall the waste be placed in a land disposal unit until the waste meets the applicable LDR standards.
- 9. All wastes which failed the gate control paint filter test shall be tested by the penetrometer test (after stabilization). No wastes which fails to possess a load bearing capacity of at least 2.0 tons per square foot (TSF) may be disposed.

H. CHEMICAL OXIDATION

1. Only the following waste codes may be processed in the listed waste treatment building utilizing the above method:

D018	Wastes containing less than 35 ppm benzene
D028	Wastes containing less than 10 ppm 1,2-Dichloroethane
D029	Wastes containing less than 100 ppm 1,1-Dichloroethylene
D030	Wastes containing less than 5 ppm 2,4-Dinitrotoluene
D032	Wastes containing less than 10 ppm Hexachlorobenzene
D033	Wastes containing less than 10 ppm Hexachlorobutadiene
D034	Wastes containing less than 5 ppm Hexachloroethane
D035	Wastes containing less than 400 ppm Methyl-Ethyl-Ketone
D036	Wastes containing less than 100 ppm Nitrobenzene
D039	Wastes containing less than 5 ppm Tetrachlorethylene
D040	Wastes containing less than 10 ppm Trichloroethylene

I. CARBON ADSORPTION

1. All wastes to be treated using carbon adsorption must be evaluated through a treatability study to determine if the carbon adsorption is effective in removing the organic constituents below MWRDGC's sewer discharge. Testing shall be conducted after actual treatment to verify treatment. For wastewater shipped off-site (in accordance with the LDR requirements), the Permittee(s) shall provide to the receiving facility a "certification" for all treatment standards that have been achieved, and/or a "notification" for all constituents which do not meet applicable LDR treatment standards. The results of each treatability study shall be retained as part of the operating record. This permit does not authorize the discharge of wastewater above MWRDGC's sewer discharge.

J. GENERIC WASTE STREAMS AUTHORIZATIONS PURSUANT TO SECTION 22.11 OF THE ENVIRONMENTAL PROTECTION ACT

- 1. The permittee is authorized to accept the wastes identified in Condition VIII(J)(2) below provided the generator complies with the following requirements:
 - a. The waste is analyzed in accordance with the waste analysis plan submitted as part of the approved Part B permit application, Condition VIII(A) and all subsequent waste analysis requirements included in the approved Part B Permit; and it is determined that the waste complies with the acceptance criteria in the approved waste analysis plan;
 - b. The waste is delivered in accordance with the "Non-hazardous Special Waste Hauling and the Uniform Program" as defined in 35 Ill. Adm. Code 809; and
 - c. The waste is accompanied by a manifest, if required.

The Agency has modified its procedures. As a result, an authorization number is no longer required. Therefore, the generator will no longer be required to identify the authorization number on the manifest when shipping waste as authorized by this permit.

- 2. The following categories of waste from more than one generator may be accepted:
 - a. Nonhazardous waste, received for storage and transfer offsite.
 - b. Nonhazardous waste, received for treatment.

- c. Hazardous waste, received for treatment.
- d. Hazardous waste, received for storage and transfer offsite.

K. Compliance Schedule

- 1. The following shall be completed and submitted to Illinois EPA by September 9, 2005:
 - a. A survey plat (i) indicating the location and dimensions of disposal units/areas with respect to permanently surveyed benchmarks and the legal boundary of the facility; (ii) a note on the plat stating: (1) The land has been used to manage hazardous waste; and (2) It's use is restricted so that disturbance of the units containing hazardous waste is prevented.
 - b. A certification of the plat by a professional land surveyor using the language specified by 35 Ill. Adm. Code 702.126(d)(1).
- 2. The following shall be completed and submitted to Illinois EPA by April 11, 2006:

A statement signed by an independent fire control professional or the responsible fire department certifying that the facility has water at adequate volume and pressure to supply water hose streams, foam producing equipment, automatic sprinklers or water sprays for Building(s) 42/24.

SFN:WRW:bjh\051161s.doc

Section IX. Air Emission Standards for Equipment Leaks

A. IDENTIFICATION OF REGULATED DEVICES

The permittee shall mark each piece of equipment to which Subpart BB applies with an equipment identification number and hazardous waste management unit identification.

B. LIGHT LIQUID SERVICE PUMPS

- 1. The permittee shall monitor each pump in light liquid services subject to Subpart BB as specified below:
 - a. conduct monthly monitoring to detect leaks as required by 35 Ill. Adm. Code 724.963(b) and described in Section BB of the permit application.
 - b. perform visual inspections each calendar week for indications of liquids dripping from the pump seal.
- 2. The permittee shall repair all pumps in light liquid service that are Subject to Subpart BB in accordance with the following:
 - a. When a leak is detected, it must be repaired as soon as practicable, but not later than 15 calendar days after it is detected. In the event more time is required, the permittee must submit a written explanation to the Illinois EPA. Such requests should be made in writing to the Bureau of Land's Field Operation Section within 10 calendar days of the leak detection.
 - b. A first attempt at repair (e.g., tightening the packing gland) must be made no later than 5 calendar days after each leak is detected.
 - c. A leak is detected from pumps in light liquid service if:
 - i) an instrument reading of 10,000 ppm or greater is measured, or
 - ii) there are indications of liquids dripping from the pump seal

C. PRESSURE RELIEF DEVICES

- 1. Except during pressure releases, the permittee shall operate each pressure relief device in gas vapor service that is subject to Subpart BB with no detectable emissions. No detectable emissions is indicated by an instrument reading of less than 500 ppm above background, as measured by the method specified in Section 724.963(c).
- 2. The permittee shall take the following actions following a pressure release:
 - a. After each pressure release, the pressure relief device must be returned to a condition of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as soon as practicable, but no later than 5 calendar days after each pressure releases.
 - b. When a leak is detected, it must be repaired as soon as practicable, but not later than 15 calendar days after it is detected. In the event more time is required, the permittee must submit a written explanation to the Illinois EPA. Such requests should be made in writing to the Bureau of Land's Field Operation Section within 10 calendar days of the leak detection.
 - c. No later than 5 calendar days after the pressure release, the pressure relief device must be monitored to conform the condition of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as measured by the method specified in Section 724.963(c) and Section BB of the permit application.

D. VALVES

- 1. The permittee shall monitor each valve in gas-vapor or light liquid service that is subject to Subpart BB monthly. Monitoring must be adequate to detect leaks by the methods specified in Section 724.963(b). The permittee shall implement procedures for leaks when an instrument reading of 10,000 ppm or greater is measured.
- 2. The permittee shall monitored and repair each valve in gas-vapor or light liquid service that is subject to Subpart BB in accordance with the following procedures:
 - a. Any valve for which a leak is not detected for two successive months may be monitored the first month of every succeeding quarter, beginning with the next quarter, until a leak is detected.

- b. If a leak is detected, the valve must be monitored monthly until a leak is not detected for two successive months.
- c. When a leak is detected, it must be repaired as soon as practicable, but not later than 15 calendar days after it is detected. In the event more time is required, the permittee must submit a written explanation to the Illinois EPA. Such requests should be made in writing to the Bureau of Land's Field Operation Section within 10 calendar days of the leak detection.
- d. A first attempt at repair must be made no later than 5 calendar days after each leak is detected.
- 3. The permittee shall make first attempts at repair which include, but are not limited to the following best practices when practicable:
 - a. Tightening of bonnet bolts.
 - b. Replacement of bonnet bolts.
 - c. Tightening of packing gland nuts.
 - d. Injection of lubricant into lubricated packing.

E. RECORD KEEPING

- 1. The permittee shall record the following information in the facility operating record:
 - a. For each piece of equipment to which Subpart BB applies:
 - 1) Equipment identification number and hazardous waste management unit identification.
 - 2) Approximate locations within the facility (e.g. gas-vapor or liquid).
 - 3) Type of equipment (e.g. a pump or pipeline valve).
 - 4) Percent-by-weight total organics in the hazardous wastestream at the equipment.
 - 5) Hazardous waste state at the equipment (e.g., gas-vapor or liquid).

- 6) Method of compliance with the standard (e.g., "monthly leak detection and repair" or "equipped with dual mechanical seals").
- 7) P&ID of the hazardous waste management unit that includes the BB equipment.
- b. A performance test plan as specified in Section 724.935(b)(3) for each control device (e.g., carbon canister that does not regenerate on-site).
- c. Documentation of compliance with Section 724.960, including the detailed design documentation or performance test results specified in Section 724.935(b)(4) and Section BB of the permit application.
- 2. When each leak is detected as specified in Section 724.952, 724.953, 724.957 or 724.958, the permittee shall comply with the following requirements.
 - a. A weatherproof and readily visible identification, marked with the equipment identification number, the date evidence of potential leak was found in accordance with Section 724.958(a), and the date the leak was detected, must be attached to the leaking equipment.
 - b. The identification on equipment required by Condition IX(E)(2)(a) above except valves, may be removed after it has been repaired.
 - c. The identification on a valve may be removed after it has been monitored for 2 successive months as specified in Section 724.957(c) and no leak has been detected during those 2 months.
- 3. When each leak is detected as specified in Section 724.952, 724.953, 724.957 or 724.958, the permittee shall record the following information in an inspection log which must be kept in the facility operating record:
 - a. The instrument and operator identification numbers and the equipment identification number.
 - b. The date evidence of a potential leak was found in accordance with Section 724.958(a).
 - c. The date the leak was detected and the dates of each attempt to repair the leak.
 - d. Repair methods applied in each attempt to repair the leak.

0316000051

- e. "Above 10,000", if the maximum instrument reading measured by the methods specified in Section 724.963(b) after each repair attempt is equal to or greater than 10,000 ppm.
- f. "Repair delayed" and the reason for the delay if a leak is not required with 15 calendar days after discovery of the leak.
- g. A detailed description of the reasons that repair could not be effected without a hazardous waste management unit shutdown and the expected date of successful repair of the leak. If the leak is repaired within 15 calendar days, signed and certified by the facility operator in accordance with the procedures in 35 Ill. Adm. Code 702.126.
- h. The date of successful repair of the leak.
- 4. The permittee shall record design documentation on monitoring, operating and inspection information for each closed-vent system and control device required to comply with the provisions of Section 724.960. The information shall be kept-up-to-date in the facility operating record as specified in Section 724.935(d)(1) and (2), and monitoring, operating and inspection information in Section 724.935(c)(3) through (8).
- 5. The permittee shall record information pertaining to all equipment subject to the requirements of Subpart BB. The following information shall be kept in a log as part of the facility operating record:
 - a. A list of identification numbers for equipment (except welding fittings) subject to the requirements of Subpart BB.
 - b. A list of identification numbers for equipment that the owner or operator elects to designate for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, under the provisions of Sections 724.952(e), 724.953(i) and 724.957(f). The designation of this equipment must be signed and certified by the permittee using the language identified in 35 Ill. Adm. Code 702.126.
 - c. A list of equipment identification numbers for pressure relief devices to comply with Section 724.954(a).
 - d. Compliance testing information including copies of:
 - 1) The dates of each required compliance test.

- 2) The background level measured during each compliance test.
- 3) The maximum instrument reading measured at the equipment during each compliance test.
- e. A list of identification numbers for equipment in vacuum service.
- 6. For valves complying with Section 724.962, the permittee shall record the following information in the facility operating record:
 - a. A schedule of monitoring.
 - b. The percent of valves found leaking during each monitoring period.
- 7. For each pump in light liquid service subject to Section 724.952, the permittee shall record the following information in a log that is kept in the facility operating record:
 - a. Criteria required in Section 724.952(d)(5)(B) and 724.953(e)(2) and an explanation of the design criteria.
 - b. Any changes in these criteria and the reasons for the changes.
- 8. For facilities using the skip period for valves, the permittee shall comply with 35 IAC 724.957, except as described below:
 - a. After two consecutive quarterly leak detection periods with the percentages of valves leaking equal to or less than 2 percent, the permittee may begin to skip one of the quarterly leak detection periods for the valves subject to 35 Ill. Adm. Code 724.957.
 - b. After five consecutive quarterly leak detection periods with the percentages of valves leaking equal to or less than 2 percent, the permittee may begin to skip three of the quarterly leak detection periods for the valves subject to 35 Ill. Adm. Code 724.957.
 - c. If the percentage of valves leaking is greater than 2 percent, the permittee must conduct monitoring monthly in compliance with the requirements of 35 IAC 724.957 and must notify the Agency's Bureau of Land Field Operation section. The permittee may again elect to use the skip period alternative for valves after.

F. REPORTING

- 1. The permittee must submit a semi-annual report to the Agency by the last day of March and September of each year. The report must include the following information:
 - a. The USEPA and Illinois EPA identification numbers (35 Ill. Adm. Code 722.112), name, and address of the facility.
 - b. For each month during the semi-annual reporting period:
 - 1) The equipment identification number of each valve for which a leak was not repaired as required in Section 724.957(d).
 - 2) The equipment identification number of each pump for which a leak was not repaired as required in Section 724.952(c) and (d)(6).
 - 3) The equipment identification number of each compressor for which a leak was not repaired as required in Section 724.953(g).
 - c. Dates of hazardous waste management unit shutdowns that occurred with the semi-annual reporting period.
 - d. For each month during the semi-annual reporting period, dates when the control device installed as required by Sections 724.952, 724.953, 724.954 or 724.955, exceeded or operated outside of the design specifications as defined in Section 724.964(e) and as indicated by the control device monitoring required by Section 724.960 and was not corrected within 24 hours, the duration and cause of each exceedence, and any corrective measures taken.

If during the semi-annual reporting period, leaks from valves, pumps and compressors are repaired as required in Sections 724.957(d), 724.952(c) and (d)(6) and 724.953(g), respectively, and the control device does not exceed or operate outside of the design specifications as defined in Section 724.964(e) for more than 24 hours, a report to the Agency is not required.

The report shall be sent to the following address:

Illinois EPA BOL – Permit Section #33 1021 North Grand Avenue East Springfield, Illinois 62794-9276

SFN:MAS:bjh\051161s.doc

SECTION X: AIR EMISSION STANDARDS FOR TANKS, SURFACE IMPOUNDMENTS AND CONTAINERS

A. For tanks that vent to a control device

- 1. Whenever a waste is in the tank, the permittee shall not operate the fixed roof tanks identified in Unit 43, Unit 16 and Unit 22 unless each closure device has been secured in the closed position and the vapor headspace underneath the fixed roof has been vented to the control device except as follows:
 - a. To provide access to the tank for performing routine inspection, maintenance, or other activities needed for normal operations. Following completion of the activity, the owner or operator shall promptly secure the closure device in the closed position or reinstall the cover, as applicable, to the tank.
 - b. To remove accumulated sludge or other residue from the bottom of a tank.
 - c. To open a safety device to avoid an unsafe condition.
- 2. The permittee shall inspect and monitor the air emission control equipment in accordance with the following procedure:
 - a. The fixed roof and its closure devices must be visually inspected by the permittee to check for defects that could result in air pollutant emissions.
 - b. The closed vent system and control device must be inspected and monitored by the permittee in accordance with the procedures specified in 35 Ill. Adm. Code 724.987.
 - c. The permittee shall perform an initial inspection of the air emission control equipment on or before the date that the tank becomes subject to Subpart CC. Thereafter, the permittee shall perform the inspections at least once every year except for the special conditions provided for in 35 Ill. Adm. Code 724.984(1).
 - d. In the event a defect is detected, the permittee shall repair the defect in accordance with the requirements of condition B.
 - e. The permittee shall maintain a record of the inspection in accordance with the requirements specified in 35 Ill. Adm. Code 724.989(b).

B. Repair Condition

The permittee shall repair each defect detected during an inspection as follows:

- 1. The permittee shall make first efforts at repair of the defect no later than five calendar days after detection, and repair must be completed as soon as possible but no later than 45 calendar days after a detection.
- 2. Repair of a defect may be delayed beyond 45 calendar days if the permittee determines that repair of the defect requires emptying or temporary removal from service of the tank and no alternative tank capacity is available at the site to accept the hazardous waste normally managed in the tank. In this case, the permittee shall repair the defect the next time the process or unit that is generating the hazardous waste managed in the tank stops operation. Repair of the defect must be completed before the process or unit resumes operation.

C. Containers

Level 1 and/or Level 2 containers

- 1. Whenever hazardous waste is in a container subject to controls, the permittee shall install all covers and closure devices for the container and secure and maintain each closure device in closed position except:
 - a. Opening of a closure device or cover for a container is allowed for the purposes of adding/removing hazardous waste or material as follows:
 - 1. In the case where the container is filled to the intended final level in one continuous operation, the permittee shall promptly secure the closure devices in the closed position and install the covers upon conclusion of the filling operation.
 - 2. In the case where discrete quantities or batches of material intermittently are added to the container over a period of time, the permittee shall promptly secure the closure devices in the closed position and install covers upon either the container being filled to the intended final level; the completion of a batch loading after which no additional material will be added to the container within 15 minutes; the person performing the loading operation leaving the immediate vicinity of the container; or the shutdown of the process generating the material being added to the container, whichever condition occurs first.

- 3. An empty container, as defined in 35 Ill. Adm. Code 721.107(b), may be open to the atmosphere at any time.
- 4. In the case when discrete quantities or batches of material are removed from the container but the container does not meet the conditions to be an empty container as defined in 35 Ill. Adm. Code 721.107(b), the permittee shall promptly secure the closure devices in the closed position and install covers upon the completion of a batch removal after which no additional material will be removed from the container within 15 minutes or the person performing the unloading operation leaves the immediate vicinity of the container, whichever condition occurs first.
- b. Opening of a closure device or cover is allowed when access inside the container is needed to perform routine activities other than transfer of hazardous waste.
- c. Opening of a spring-loaded pressure-vacuum relief valve, conservation vent, or similar type of pressure relief device which vents to the atmosphere is allowed during normal operations for the purpose of maintaining the internal pressure of the container in accordance with the container design specifications.
- d. Opening of a safety device is allowed at any time conditions require doing so to avoid an unsafe condition.
- 2. The permittee shall inspect the containers and their covers and closure devices as follows:
 - a. In the case when a hazardous waste already is in the container at the time the permittee first accepts possession of the container at the facility and the container in not emptied within 24 hours after the container is accepted at the facility, the permittee shall visually inspect the container and its cover and closure devices to check for visible cracks, holes, gaps, or other open spaces into the interior of the container when the cover and closure devices are secured in the closed position. The container visual inspection must be conducted on or before the date on which the container is accepted at the facility.
 - b. In the case when a container used for managing hazardous waste remains at the facility for a period of one year or more, the permittee shall visually inspect the container and its cover and closure device initially and

thereafter, at least once every 12 months, to check for visible cracks, holes, gaps, or other open spaces into the interior of the container when the cover and closure devices are secured in the closed position.

c. When a defect is detected for the container, cover, or closure devices, the permittee shall make first efforts at repair of the defect no later than 24 hours after detection and repair must be completed as soon as possible butt no later than five calendar days after detection. If repair cannot be completed with five calendar days, then the hazardous waste must be removed from the container and the container must not be used to manage hazardous waste until the defect is repaired.

D. For control devices in 724.987

- 1. The permittee shall submit a semiannual written report to the Agency for control devices used in accordance with 35 Ill. Adm. Code 724.987, except as provided below. The report shall describe each occurrence during the previous 6-month period when either of the two following events occurs: a control device is operated continuously for 24 hours or longer in noncompliance with the applicable operating values defined in 35 Ill. Adm. Code 724.935(c)(4) or a flare is operated with visible emissions for five minutes or longer in a two-hour period, as defined in 35 Ill. Adm. Code 724.933(d). The written report shall include the USEPA identification number, the facility name and address, and an explanation why the control device could not be returned to compliance within 24 hours, and actions taken to correct the noncompliance. The report shall be signed and dated by an authorized representative of the permittee. The permittee must submit the report to the Agency by the last day of March and September of each year.
- 2. A report to the Agency is not required for a 6-month period during which all control devices subject to Subpart CC are operated by the permittee so that both of the following conditions result: during no period of 24 hours or longer did a control device operate continuously in noncompliance with the applicable operating values defined in Section 724.935(c)(4) and no flare was operated with visible emissions for five minutes or longer in a two-hour period, as defined in Section 724.933(d).

SFN:MAS:bjh\051161s.doc

ATTACHMENT A

WASTES WHICH CAN BE ACCEPTED AND HAZARDOUS WASTE IDENTIFICATION NUMBERS

LPC 0316000051

Clean Harbors Svcs Inc

RCRA Log No. B-16R

HAZARDOUS WASTE CODES ACCEPTABLE FOR THE RCRA EXEMPT WASTEWATER TREATMENT UNITS

Hazardou	ıs
----------	----

Waste No. Description of Hazardous Waste

A. Characteristically Hazardous Waste

	·
D001	Solid waste that exhibits the characteristic of ignitability, but is not listed as a hazardous waste (HN03 (>40%)).
D002	Solid waste that exhibits the characteristic of corrosivity, but is not listed as a hazardous waste.
D003	Solid waste that exhibits the characteristic of reactivity, but is not listed as a hazardous waste.
D004	Solid waste exhibiting the characteristic of TCLP toxicity for arsenic at 5.0 mg/l or more.
D005	Solid waste exhibiting the characteristic of TCLP toxicity for barium at 100 mg/l or more.
D006	Solid waste exhibiting the characteristic of TCLP toxicity for cadmium at 1.0 mg/l or more.
D007	Solid waste exhibiting the characteristic of TCLP toxicity for chromium at 5.0 mg/l or more.
D008	Solid waste exhibiting the characteristic of TCLP toxicity for lead at 5.0 mg/l or more.
D009	Solid waste exhibiting the characteristic of TCLP toxicity for mercury at 0.2 mg/l or more.
D010	Solid waste exhibiting the characteristic of TCLP toxicity for selenium at 1.0 mg/l or more.
D011	Solid waste exhibiting the characteristic of TCLP toxicity for silver at 5.0 mg/l or more.

Hazardous Waste No.	Description of Hazardous Waste
D018	Solid waste exhibiting the characteristic of TCLP toxicity for benzene at 0.5 mg/l or more.
D019	Solid waste exhibiting the characteristic of TCLP toxicity for carbon tetrachloride at 0.5 mg/l or more.
D021	Solid waste exhibiting the characteristic of TCLP toxicity for chlorobenzene at 100.0 mg/l or more.
D022	Solid waste exhibiting the characteristic of TCLP toxicity for chloroform at 6.0 mg/l or more.
D023	Solid waste exhibiting the characteristic of TCLP toxicity for o-cresol at 200.0 mg/l or more.
D024	Solid waste exhibiting the characteristic of TCLP toxicity for m-cresol at 200.0 mg/l or more.
D025	Solid waste exhibiting the characteristic of TCLP toxicity for p-cresol at 200.0 mg/l or more.
D026	Solid waste exhibiting the characteristic of TCLP toxicity for cresol at 200.0 mg/l or more.
D027	Solid waste exhibiting the characteristic of TCLP toxicity for 1,4 dichlorobenzene at 7.5 mg/l or more.
D028	Solid waste exhibiting the characteristic of TCLP toxicity for 1,2 dichloroethane at 0.5 mg/l or more.
D029	Solid waste exhibiting the characteristic of TCLP toxicity for 1,1 dichloroethylene at 0.7 mg/l or more.
D030	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4 dinitrotoluene at 0.13 mg/l or more.

Hazardous Waste No.	Description of Hazardous Waste
D032	Solid waste exhibiting the characteristic of TCLP toxicity for hexachlorobenzene at 0.13 mg/l or more.
D033	Solid waste exhibiting the characteristic of TCLP toxicity for hexachlorobutadiene at 0.5 mg/l or more.
D034	Solid waste exhibiting the characteristic of TCLP toxicity for hexachloroethane at 3.0 mg/l or more.
D035	Solid waste exhibiting the characteristic of TCLP toxicity for methyl ethyl ketone at 200.0 mg/l or more.
D036	Solid waste exhibiting the characteristic of TCLP toxicity for nitrobenzene at 2.0 mg/l or more.
D039	Solid waste exhibiting the characteristic of TCLP toxicity for tetrachloroethylene at 0.7 mg/l or more.
D040	Solid waste exhibiting the characteristic of TCLP toxicity for trichloroethylene at 0.5 mg/l or more.
D041	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4,5 trichlorophenol at 400.0 mg/l or more.
D042	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4,6 trichlorophenol at 2.0 mg/l or more.
D043	Solid waste exhibiting the characteristic of TCLP toxicity for vinyl chloride at 0.2 mg/l or more.

B. Hazardous Wastes from Non-Specific Sources

K062 Spent pickle liquor generated by steel finishing operations of facility within the iron and steel industry (SIC Code 331 and 332, as defined in 35 Ill. Adm. Code 720.110).

HAZARDOUS WASTE CODES ACCEPTABLE FOR THE LISTED WASTE TREATMENT PROCESS (NEUTRALIZATION, PRECIPITATION, COAGULATION, OXIDATION, STRIPPING OR CARBON ADSORPTION)

Hazardous

Waste No. Description of Hazardous Waste

A. Characteristically Hazardous Waste

D001	Solid waste that exhibits the characteristic of ignitability, but is not listed as a hazardous waste.
D002	Solid waste that exhibits the characteristic of corrosivity, but is not listed as a hazardous waste.
D003	Solid waste that exhibits the characteristic of reactivity, but is not listed as a hazardous waste.
D004	Solid waste exhibiting the characteristic of TCLP toxicity for arsenic at 5.0 mg/l or more.
D005	Solid waste exhibiting the characteristic of TCLP toxicity for barium at 100 mg/l or more.
D006	Solid waste exhibiting the characteristic of TCLP toxicity for cadmium at 1.0 mg/l or more.
D007	Solid waste exhibiting the characteristic of TCLP toxicity for chromium at 5.0 mg/l or more.
D008	Solid waste exhibiting the characteristic of TCLP toxicity for lead at 5.0 mg/l or more.
D009	Solid waste exhibiting the characteristic of TCLP toxicity for mercury at 0.2 mg/l or more.
D010	Solid waste exhibiting the characteristic of TCLP toxicity for selenium at 1.0 mg/l or more.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
D011	Solid waste exhibiting the characteristic of TCLP toxicity for silver at 5.0 mg/l or more.
D018	Solid waste exhibiting the characteristic of TCLP toxicity for benzene at 0.5 mg/l or more.
D019	Solid waste exhibiting the characteristic of TCLP toxicity for carbon tetrachloride at 0.5 mg/l or more.
D021	Solid waste exhibiting the characteristic of TCLP toxicity for chlorobenzene at 100.0 mg/l or more.
D022	Solid waste exhibiting the characteristic of TCLP toxicity for chloroform at 6.0 mg/l or more.
D023	Solid waste exhibiting the characteristic of TCLP toxicity for o-cresol at 200.0 mg/l or more.
D024	Solid waste exhibiting the characteristic of TCLP toxicity for m-cresol at 200.0 mg/l or more.
D025	Solid waste exhibiting the characteristic of TCLP toxicity for p-cresol at 200.0 mg/l or more.
D026	Solid waste exhibiting the characteristic of TCLP toxicity for cresol at 200.0 mg/l or more.
D027	Solid waste exhibiting the characteristic of TCLP toxicity for 1,4 dichlorobenzene at 7.5 mg/l or more.
D028	Solid waste exhibiting the characteristic of TCLP toxicity for 1,2 dichloroethane at 0.5 mg/l or more.
D029	Solid waste exhibiting the characteristic of TCLP toxicity for 1,1 dichloroethylene at 0.7 mg/l or more.

Description of Hazardous Waste
Solid waste exhibiting the characteristic of TCLP toxicity for 2,4 dinitrotoluene at 0.13 mg/l or more.
Solid waste exhibiting the characteristic of TCLP toxicity for hexachlorobenzene at 0.13 mg/l or more.
Solid waste exhibiting the characteristic of TCLP toxicity for hexachlorobutadiene at 0.5 mg/l or more.
Solid waste exhibiting the characteristic of TCLP toxicity for hexachloroethane at 3.0 mg/l or more.
Solid waste exhibiting the characteristic of TCLP toxicity for methyl ethyl ketone at 200.0 mg/l or more.
Solid waste exhibiting the characteristic of TCLP toxicity for nitrobenzene at 2.0 mg/l or more.
Solid waste exhibiting the characteristic of TCLP toxicity for pentachlorophenol at 100 mg/l or more.
Solid waste exhibiting the characteristic of TCLP toxicity for pyridine at 5.0 mg/l or more.
Solid waste exhibiting the characteristic of TCLP toxicity for tetrachloroethylene at 0.7 mg/l or more.
Solid waste exhibiting the characteristic of TCLP toxicity for trichloroethylene at 0.5 mg/l or more.
Solid waste exhibiting the characteristic of TCLP toxicity for 2,4,5 trichlorophenol at 400.0 mg/l or more.
Solid waste exhibiting the characteristic of TCLP toxicity for 2,4,6 trichlorophenol at 2.0 mg/l or more.

Hazardous

Waste No. Description of Hazardous Waste

D043 Solid waste exhibiting the characteristic of TCLP toxicity for vinyl chloride at

0.2 mg/l or more.

B. Hazardous Wastes From Non-Specific Sources

F001 The following spent halogenated solvents used in degreasing:

tetrachloroethylene, trichloroethylene, methylene chloride, 1,1,1-trichloroethane, carbon tetrachloride, chlorinated fluorocarbons, spent solvent mixtures/blends used in degreasing, and still bottom from the recovery of these spent solvents and

spent solvent mixtures.

F002 The following spent halogenated solvents: tetrachloroethylene, methylene

chloride, trichloroethylene, 1,1,1-trichloroethane, chlorobenzene, 1,1,2-trichloro-1,2,2-trifluoroethane, orthodichlorobenzene,

trichlorofluoromethane, 1,1,2-trichloroethane, spent solvent mixtures and blends, and the still bottoms from the recovery of these spent solvents and spent solvent

mixtures.

F003 The following spent non-halogenated solvents: xylene, acetone, ethyl acetate,

ethyl benzene, ethyl ether, methyl isobutyl ketone, n-buryl alcohol,

cyclohexanone, methanol, spent solvent mixtures and blends, and the still bottoms from the recovery of these spent solvents and spent solvent mixtures.

F004 The following spent non-halogenated solvents: cresols and cresylic acid,

nitrobenzene, spent solvent mixtures and blends, and still bottoms from the

recovery of these spent solvents and spent solvent mixtures.

F005 The following spent non-halogenated solvents: toluene, methyl ethyl ketone,

carbon disulfide, isobutanol, pyridine, benzene, 2-ethoxyethanol, 2-nitropropane,

spent solvent mixtures and blends, and the still bottoms from the recovery of

these spent solvents and spent solvent mixtures.

F006 Wastewater treatment sludges from electroplating operations.

F007 Spent cyanide plating baths from electroplating operations.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
F008	Plating bath residues from the bottom of plating baths from electroplating operations where cyanides are used in the process.
F009	Spent stripping and cleaning bath solutions from electroplating operations where cyanides are used in the process.
F010	Quenching bath residues from oil baths from metal heat treating operations where cyanides are used in the process.
F011	Spent cyanide solutions from salt bath pot cleaning from metal heat treating operations.
F012	Quenching wastewater treatment sludges from metal heat treating operations where cyanides are used in the process.
F019	Wastewater treatment sludges from the chemical conversion coating of aluminum except from zirconium phosphating in aluminum can washing when such phosphating is an exclusive.
F039	Multi-Source leachate.

C. Hazardous Wastes From Specific Sources

K002	wastewater treatment sludge from the production of chrome yellow and orange pigments.
K003	Wastewater treatment sludge from the production of molybdate orange pigments.
K004	Wastewater treatment sludge from the production of zinc yellow pigments.
K005	Wastewater treatment sludge from the production of chrome green pigments.
K006	Wastewater treatment sludge from the production of chrome oxide green pigments (anhydrous and hydrated).
K007	Wastewater treatment sludge from the production of iron blue pigments.

<u>Hazardous</u>	
Waste No.	Description of Hazardous Waste
K008	Oven residue from the production of chrome oxide green pigments.
K046	Wastewater treatment sludges from the manufacturing, formulation and loading of lead based initiating compounds.
K048	Dissolved air flotation (DAF) float from the petroleum refining industry.
K052	Tank bottoms (leaded) from the petroleum refining industry.
K060	Ammonia still lime sludge from coking operations.
K061	Emission control dust/sludge from the primary production of steel in electric furnaces.
K062	Spent pickle liquor generated by steel finishing operations of facilities within the iron and steel industry (SIC Codes 331 and 332) (as defined in 35 Ill. Adm. Code 720.110).
K069	Emission control dust/sludge from secondary lead smelting.
K086	Solvent washes and sludges, caustic washes and sludges, or water washes and sludges from cleaning tubs and equipment used in the formulation of ink from pigments, driers, soaps and stabilizers containing chromium and lead.
K087	Decanter tank tar sludge from coking operations.
K100	Waste leaching solution from acid leaching of emission control dust/sludge from secondary lead smelting.

HAZARDOUS WASTE CODES ACCEPTABLE FOR STABILIZATION/FIXATION

Η	azardous	ì

Waste No. Description of Hazardous Waste

A. Characteristically Hazardous Waste

D004	Solid waste exhibiting the characteristic of TCLP toxicity for arsenic at 5.0 mg/l or more.
D005	Solid waste exhibiting the characteristic of TCLP toxicity for barium at 100 mg/l or more.
D006	Solid waste exhibiting the characteristic of TCLP toxicity for cadmium at 1.0 mg/l or more.
D007	Solid waste exhibiting the characteristic of TCLP toxicity for chromium at 5.0 mg/l or more.
D008	Solid waste exhibiting the characteristic of TCLP toxicity for lead at 5.0 mg/l or more.
D009	Solid waste exhibiting the characteristic of TCLP toxicity for mercury at 0.2 mg/l or more.
D010	Solid waste exhibiting the characteristic of TCLP toxicity for selenium at 1.0 mg/l or more.
D011	Solid waste exhibiting the characteristic of TCLP toxicity for silver at 5.0 mg/l or more.

B. Hazardous Waste From Specific Sources

K062 Spent pickle liquor generated by steel finishing operations of facilities within the iron and steel industry (SIC Codes 331 and 332) (as defined in 35 Ill. Adm. Code 720.110).

Hazardous

Waste No. Description of Hazardous Waste

C. Hazardous Waste From Non-Specific Sources

F006 ⁽¹⁾	Wastewater treatment sludges from electroplating operations except from the following processes: (1) sulfuric acid anodizing of aluminum; (2) tin plating on carbon steel; (3) zinc plating (segregated basis) on carbon steel; (4) aluminum or zinc-aluminum plating on carbon steel; (5) cleaning/stripping associated with tin, zinc and aluminum plating on carbon steel; and (6) chemical etching and milling of aluminum.
F007 ⁽¹⁾	Spent cyanide plating bath solutions from electroplating operations.
F008 ⁽¹⁾	Plating bath residues from the bottom of plating baths from electroplating operations where cyanides are used in the process.
F009 ⁽¹⁾	Spent stripping and cleaning bath solutions from electroplating operations where cyanides are used in the process.
F010 ⁽¹⁾	Quenching bath residues from oil baths from metal heat treating operations where cyanides are used in the process.
F011 ⁽¹⁾	Spent cyanide solutions from salt bath pot cleaning from metal heat treating operations.
F012 ⁽¹⁾	Quenching wastewater treatment sludges from metal heat treating operations where cyanides are used in the process.
F019 ⁽¹⁾	Wastewater treatment sludges from the chemical conversion coating of aluminum.

The facility cannot stabilize wastes containing parameters above land ban restrictions whose BDAT as identified in the Federal Register is not based on stabilization (i.e., cyanide).

HAZARDOUS WASTE CODES ACCEPTABLE FOR STORAGE AND TRANSFER, SHREDDING, CRUSHING AND/OR FUEL BLENDING

Hazardous

Waste No. Description of Hazardous Waste

A. Characteristically Hazardous Waste

D001	Solid waste that exhibits the characteristic of ignitability, but is not listed as a hazardous waste.
D002	Solid waste that exhibits the characteristic of corrosivity, but is not listed as a hazardous waste.
D003 ²	Solid waste that exhibits the characteristic of reactivity, but is not listed as a hazardous waste.
D004	Solid waste exhibiting the characteristic of TCLP toxicity for arsenic at 5.0 mg/l or more.
D005 ²	Solid waste exhibiting the characteristic of TCLP toxicity for barium at 100 mg/l or more.
D006 ²	Solid waste exhibiting the characteristic of TCLP toxicity for cadmium at 1.0 mg/l or more.
D007	Solid waste exhibiting the characteristic of TCLP toxicity for chromium at 5.0 mg/l or more.
D008 ²	Solid waste exhibiting the characteristic of TCLP toxicity for lead at 5.0 mg/l or more.
D009 ²	Solid waste exhibiting the characteristic of TCLP toxicity for mercury at 0.2 mg/l or more.
D010	Solid waste exhibiting the characteristic of TCLP toxicity for selenium at 1.0 mg/l or more.
D011	Solid waste exhibiting the characteristic of TCLP toxicity for silver at 5.0 mg/l or more.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
D012	Solid waste exhibiting the characteristic of TCLP Toxicity for Endrin at 0.02 mg/l or more.
D013	Solid Waste exhibiting the characteristic of TCLP Toxicity for Lindane at 0.4 mg/l or more.
D014	Solid Waste exhibiting the characteristic of TCLP Toxicity for Methoxychlor at 10.0 mg/l or more.
D015	Solid waste exhibiting the characteristic of TCLP Toxicity for Toxaphene at 0.5 mg/l or more.
D016	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4-D at 10.0 mg/l or more.
D017	Solid waste exhibiting the characteristic of TCLP Toxicity for 2,4,5-TP (Silvex) at 1.0 mg/l or more.
D018	Solid waste exhibiting the characteristic of TCLP toxicity for benzene at 0.5 mg/l or more.
D019	Solid waste exhibiting the characteristic of TCLP toxicity for carbon tetrachloride at 0.5 mg/l or more.
D020	Solid waste exhibiting the characteristic of TCLP Toxicity for chlordane at 0.03 mg/l or more.
D021	Solid waste exhibiting the characteristic of TCLP toxicity for chlorobenzene at 100.0 mg/l or more.
D022	Solid waste exhibiting the characteristic of TCLP toxicity for chloroform at 6.0 mg/l or more.
D023	Solid waste exhibiting the characteristic of TCLP toxicity for o-cresol at 200.0 mg/l or more.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
D024	Solid waste exhibiting the characteristic of TCLP toxicity for m-cresol at 200.0 mg/l or more.
D025	Solid waste exhibiting the characteristic of TCLP toxicity for p-cresol at 200.0 mg/l or more.
D026	Solid waste exhibiting the characteristic of TCLP toxicity for cresol at 200.0 mg/l or more.
D027	Solid waste exhibiting the characteristic of TCLP toxicity for 1,4 dichlorobenzene at 7.5 mg/l or more.
D028	Solid waste exhibiting the characteristic of TCLP toxicity for 1,2 dichloroethane at 0.5 mg/l or more.
D029	Solid waste exhibiting the characteristic of TCLP toxicity for 1,1 dichloroethylene at 0.7 mg/l or more.
D030	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4 dinitrotoluene at 0.13 mg/l or more.
D031	Solid waste exhibiting the characteristic of TCLP Toxicity for heptachlor (and its epoxide) at 0.008 mg/l or more.
D032	Solid waste exhibiting the characteristic of TCLP toxicity for hexachlorobenzene at 0.13 mg/l or more.
D033	Solid waste exhibiting the characteristic of TCLP toxicity for hexachlorobutadiene at 0.5 mg/l or more.
D034	Solid waste exhibiting the characteristic of TCLP toxicity for hexachloroethane at 3.0 mg/l or more.
D035	Solid waste exhibiting the characteristic of TCLP toxicity for methyl ethyl ketone at 200.0 mg/l or more.

Hazardous Waste No.	Description of Hazardous Waste
D036	Solid waste exhibiting the characteristic of TCLP toxicity for nitrobenzene at 2.0 mg/l or more.
D037	Solid waste exhibiting the characteristic of TCLP toxicity for pentachlorophenol at 100.0 mg/l or more.
D038	Solid waste exhibiting the characteristic of TCLP toxicity for pyridine at 5.0 mg/l or more.
D039	Solid waste exhibiting the characteristic of TCLP toxicity for tetrachloroethylene at 0.7 mg/l or more.
D040	Solid waste exhibiting the characteristic of TCLP toxicity for trichloroethylene at 0.5 mg/l or more.
D041	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4,5 trichlorophenol at 400.0 mg/l or more.
D042	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4,6 trichlorophenol at 2.0 mg/l or more.
D043	Solid waste exhibiting the characteristic of TCLP toxicity for vinyl chloride at 0.2 mg/l or more.

B. Hazardous Wastes From Non-Specific Sources

The following spent halogenated solvents used in degreasing tetrachloroethylene, trichloroethylene, methylene chloride, 1,1,1-trichloroethane, carbon tetrachloride, and chlorinated fluorocarbons; all spent solvent mixtures and blends used in degreasing containing, before use, a total of ten percent or more (by volume) of one or more of the above halogenated solvents or those solvents listed in F002, F004 or F005; and still bottoms from the recovery of these spent solvents and spent solvent mixtures.

F002 The following spent halogenated solvents: tetrachloroethylene, methylene chloride, trichloroethylene, 1,1,1-trichloroethane, chlorobenzene, 1,1,2-trichloro-1,2,2-trifluoroethane, orthodichlorobenzene,

Hazardous

Waste No.

Description of Hazardous Waste

trichlorofluoromethane; and 1,1,2-trichloroethane; all spent solvent mixtures and blends containing, before use, a total of ten percent or more (by volume) of one or more of the above halogenated solvents or those solvents listed in F001, F004, or F005; and still bottoms from the recovery of these spent solvents and spent solvent mixtures.

F003

The following spent non-halogenated solvents: xylene, acetone, ethylacetate, ethyl benzene, ethyl ether, methyl isobutyl ketone, n-butyl alcohol, cyclohexanone, and methanol; all spent solvent mixtures and blends containing, before use, only the above spent non-halogenated solvents; and all spent solvent mixtures and blends containing, before use, one or more of the above non-halogenated solvents and a total of ten percent or more (by volume) of one or more of those solvents listed in F001, F002, F004 or F005; and still bottoms from the recovery of these spent solvents and spent solvent mixtures.

F004

The following spent non-halogenated solvents: cresols and cresylic acid, and nitrobenzene; all spent solvent mixtures and blends containing, before use, a total of ten percent or more (by volume) of one or more of the above non-halogenated solvents or those solvents listed in F001, F002 or F005; and still bottoms from the recovery of these spent solvents and spent solvent mixtures.

F005

The following spent non-halogenated solvents: toluene, methyl ethylketone, carbon disulfide, isobutanol, pyridine, benzene, 2-ethoxyethanol and 2-nitropropane; all spent solvent mixtures and blends, containing, before use, a total of ten percent or more (by volume) of one or more of the above non-halogenated solvents or those solvents listed in F001, F002 or F004; and still bottoms from the recovery of these spent solvents and spent solvent mixtures.

F006

Wastewater treatment sludges from electroplating operations except from the following processes: (1) sulfuric acid anodizing of aluminum; (2) tin plating on carbon steel; (3) zinc plating (segregated basis) on carbon steel; (4) aluminum or zinc-aluminum plating on carbon steel; (5) cleaning/stripping associated with tin, zinc and aluminum plating on carbon steel; and (6) chemical etching and milling of aluminum.

F007

Spent cyanide plating bath solutions from electroplating operations.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
F008	Plating bath residues from the bottom of plating baths from electroplating operations where cyanides are used in the process.
F009	Spent stripping and cleaning bath solutions from electroplating operations where cyanides are used in the process.
F010	Quenching bath residues from oil baths from metal heat treating operations where cyanides are used in the process.
F011	Spent cyanide solutions from salt bath pot cleaning from metal heat treating operations.
F012	Quenching wastewater treatment sludges from metal heat treating operations where cyanides are used in the process.
F019	Wastewater treatment sludges from the chemical conversion coating of aluminum.
*F020 ¹	Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production or manufacturing use (as a reactant, chemical intermediate, or component in a formulating process) of tri-, or tetrachlorphenol, or of intermediates used to produce their pesticide derivatives. (This listing does not include wastes from the production of Hexachlorophene from highly purified 2, 4, 5-trichlorophenol.)
*F021 ¹	Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production or manufacturing use (as a reactant, chemical intermediate or component in a formulating process) of pentachlorophenol, or of intermediates used to produce its derivatives.
*F022 ¹	Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the manufacturing use (as a reactant, chemical intermediate, or component in a formulating process) of tetra-, penta-, or hexachlorobenzenes under alkaline conditions.
*F023 ¹	Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production of materials on equipment previously used for

Waste No.

Description of Hazardous Waste

the production or manufacturing use (as a reactant, chemical intermediate or component in a formulating process) of tri- and tetrachlorophenols. (This listing does not include wastes from equipment used only for the production or use of hexachlorophene from highly purified 2,4,5-trichlorophenol.)

F024

Process wastes including but not limited to, distillation residues, heavy ends, tars, and reactor cleanout wastes, from the production of certain chlorinated aliphatic hydrocarbons by free radical catalyzed processes. These chlorinated aliphatic hydrocarbons are those having carbon chain lengths ranging from one to and including five with varying amounts and positions of chlorine substitution. (This listing does not include wastewaters, wastewater treatment sludges, spent catalysis and wastes listed in this Section 721.132.)

F025

Condensed light ends, spent filters and filter aids, and spent desiccant wastes from the production of certain chlorinated aliphatic hydrocarbons by free radical catalyzed processes. These chlorinated aliphatic hydrocarbons are those having carbon chain lengths ranging from one to and including five, with varying amounts and positions of chlorine substitution.

*F0261

Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production of materials on equipment previously used for the manufacturing use (as a reactant, chemical intermediate or component in a formulating process) of tetra-, penta- or hexachlorobenzene under alkaline conditions.

*F027¹

Discarded unused formulations containing tri-,tetra- or pentachlorophenol or discarded unused formulations containing compounds derived from these chlorophenols. (This listing does not include formulations containing Hexachlorophene synthesized from pre-purified 2,4,5-trichlorophenol as the sole component.

*F028¹

Residues resulting from the incineration or thermal treatment of soil contaminated with Hazardous Waste Numbers F020, F021, F023, F026 and F027.

*F032

Wastewaters, process residuals, preservative drippage and spent formulations from wood preserving processes generated at plants that currently use or have

Waste No. Descri

Description of Hazardous Waste

previously used chlorophenolic formulations (except potentially cross-contaminated wastes that have had the F032 waste code deleted in accordance with Section 721.135 and where the generator does not resume or initiate use of chlorophenolic formulations). This listing does not include K001 bottom sediment sludge from the treatment of wastewater from wood preserving processes that use creosote or pentachlorophenol.

F034

Wastewaters, process residuals, preservative drippage and spent formulations from wood preserving processes generated at plants that use creosote formulations. This listing does not include K001 bottom sediment sludge from the treatment of wastewater from wood preserving processes that use creosote or pentachlorophenol.

F035

Wastewaters, process residuals, preservative drippage and spent formulations from wood preserving processes generated at plants that use inorganic preservatives containing arsenic or chromium. This listing does not include K001 bottom sediment sludge from the treatment of wastewater from wood preserving processes that use creosote or pentachlorophenol.

F037

Petroleum refinery primary oil/water/solids separation sludge -- Any sludge generated from the gravitational separation of oil/water/solids during the storage or treatment of process wastewaters and oil cooling wastewaters from petroleum refineries. Such sludges include, but are not limited to, those generated in: oil/water/solids separators; tanks and impoundments; ditches and other conveyances; sumps; and stormwater units receiving dry weather flow. Sludges generated in stormwater units that doe not receive dry weather flow, sludges generated in aggressive biological treatment units as defined in subsection (b)(2) (including sludges generated in one or more additional units after wastewaters have been treated in aggressive biological treatment units) and K051 wastes are not included in this listing.

F038

Petroleum refinery secondary (emulsified) oil/water/solids separation sludge -- Any sludge or float generated from the physical or chemical separation of oil/water/solids in process wastewaters and oily cooling wastewaters from the physical or chemical separation of oil/water/solids in process wastewaters and oil cooling wastewaters from petroleum refineries. Such wastes include, but are not limited to, all sludges and floats generated in: induced air flotation (IAF)

Waste No.

Description of Hazardous Waste

units, tanks and impoundments, and all sludges generated in DAF units. Sludges generated in stormwater units that do not receive dry weather flow, sludges generated in aggressive biological treatment units as defined in Subsection (b)(2) (including sludges generated in one or more additional units after wastewaters have been treated in aggressive biological treatment units), F037, K048 and K051 wastes are not included in this listing.

F039

Leachate resulting from the treatment, storage or disposal of wastes classified by more than one waste code under Subpart D, or from a mixture of wastes classified under Subparts C and D. (Leachate resulting from the management of one or more of the following USEPA hazardous wastes and no other hazardous wastes retains its hazardous waste code(s): F020, F021, F022, F023, F026, F027 or F028.)

Hazardous Wastes From Specific Sources

K001	Bottom sediment sludge from the treatment of wastewaters from wood preserving processes that use creosote and/or pentachlorophenol.
K002	Wastewater treatment sludge from the production of chrome yellow and orange pigments.
K003	Wastewater treatment sludge from the production of molybdate orange pigments.
K004	Wastewater treatment sludge from the production of zinc yellow pigments.
K005	Wastewater treatment sludge from the production of chrome green pigments.
K006	Wastewater treatment sludge from the production of chrome oxide green pigments (anhydrous and hydrated).
K007	Wastewater treatment sludge from the production of iron blue pigments.
K008	Oven residue from the production of chrome oxide green pigments.
K009	Distillation bottoms from the production of acetaldehyde from ethylene.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
K010	Distillation side cuts from the production of acetaldehyde from ethylene.
K011	Bottom stream from the wastewater stripper in the production of acrylonitrile.
K013	Bottom stream from the acetronitrile column in the production of acylonitrile.
K014	Bottoms from the acetontrile purification column in the production of acrylonitrile.
K015	Still bottoms from the distillation of benzyl chloride.
K016	Heavy ends or distillation residues from the production or carbon tetrachloride.
K017	Heavy ends (still bottoms) from the purification column in the production of epichlorohydrin.
K018	Heavy ends from the fractionation column in ethyl chloride production.
K019	Heavy ends of the distillation of ethylene dichloride in thylene dichloride production.
K020	Heavy ends from the distillation of vinyl chloride in vinyl chloride monomer production.
K021	Aqueous spent antimony catalyst waste from fluoromethanes production.
K022	Distillation bottom tars from the production of phenol/acetone from cumene.
K023	Distillation light ends from the production of phthalic anhydride from naphthalene.
K024	Distillation bottoms from the production of phthalic anhydride from naphthalene.
K025	Distillation bottoms from the production of phthalic anhydride from naphthalene.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
K026	Stripping still tails from the production of methy ethyl pyridines.
K027	Centrifuge and distillation residues from toluene diisocyanate production.
K028	Spent catalyst from the hydrochlorinator reactor in the production of 1,1,1-trichlorethane.
K029	Waste from the product stream stripper in the production of 1,1,1-trichloroethane.
K030	Column bottoms or heavy ends from the combined production of trichlorethylene and perchloroethylene.
K031	By-product salts generated in the production of MSMA and cacodylic acid.
K032	Wastewater treatment sludge from the production of chlordane.
K033	Wastewater and scrub water from the chlorination of cyclopentadiene in the production of chlordane.
K034	Filter solids from the filtration of hexachlorocyclopentadiene in the production of chlordane.
K035	Wastewater treatment sludges generated in the production of creosote.
K036	Still bottoms from toluene reclamation distillation in the production of disulfoton.
K037	Wastewater treatment sludges from the production of disulfoton.
K038	Wastewater from the washing and stripping of phorate production.
K039	Filter cake from the filteration of diethylphosphorodithioic acid in the production of phorate.
K040	Wastewater treatment sludge from the production of phorate.

<u>Hazardous</u> Waste No.	Description of Hazardous Waste
	Description of Hazardous Waste
K041	Wastewater treatment sludge from the production of toxaphene.
K042	Heavy ends or distillation residues from the distillation of tetrachlorobenzene in the production of 2,4,5-T.
K043	2,6-Dichlorophenol waste from the production of 2,4-D.
K044	Wastewater treatment sludges from the manufacturing and processing of explosives.
K045	Spent carbon from the treatment of wastewater containing explosives.
K046	Wastewater treatment sludges from the manufacturing, formulation and loading of lead based initiating compounds.
K047	Pink/red water from TNT operations.
K048	Dissolved air flotation (DAF) float from the petroleum refining industry.
K049	Slop oil emulsion solids from the petroleum refining industry.
K050	Heat exchanger bundle cleaning sludge from the petroleum refining industry.
K051	API separator sludge from the petroleum refining industry.
K052	Tank bottoms (leaded) from the petroleum refining industry.
K060	Ammonia still lime sludge from coking operations.
K061	Emission control dust/sludge from the primary production of steel in electric furnaces.
K062	Spent pickle liquor generated by steel finishing operations of facilities within the iron and steel industry (SIC Codes 331 and 332) (as defined in 35 Ill. Adm. Code 720.110).

Waste No.	Description of Hazardous Waste
K064	Acid plant blowdown slurry or sludge resulting from the thickening of blowdown slurry from primary copper production.
K065	Surface impoundment solids contained in and dredged from surface impoundments at primary lead smelting facilities.
K066	Sludge from treatment of process wastewater or acid plant blowdown from primary zinc production.
K069	Emission control dust/sludge from secondary lead smelting.
K071	Brine purification muds from the mercury cell process in chlorine production, where separately pre-purified brine is not used.
K073	Chlorinated hydrocarbon waste from the purification step of the diaphram cell process using graphite anodes in chlorine production.
K083	Distillation bottoms from aniline production.
K084	Wastewater treatment sludges generated during the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds.
K085	Distillation or fractionation column bottoms from the production of chlorobenzenes.
K086	Solvent washes and sludges, caustic washes and sludges, or water washes and sludges from cleaning tubs and equipment used in the formulation of ink from pigments, driers, soaps and stabilizers containing chromium and lead.
K087	Decanter tank tar sludge from coking operations.
K088	Spent potliners from primary aluminum reduction.
K090	Emission control dust or sludge from ferrochromiumsilicon production.
K091	Emission control dust or sludge from ferrochromium production.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
K093	Distillation light ends from the production of phthalic anhydride from ortho-xylene.
K094	Distillation bottoms from the production of phthalic anhydride from ortho-xylene.
K095	Distillation bottoms from the production of 1,1,1-trichloroethane.
K096	Heavy ends from the heavy ends column from the production of 1,1,1-trichloroethane.
K097	Vacuum stripper discharge from the chlordane chlorinator in the production of chlordane.
K098	Untreated process wastewater from the production of toxaphene.
K099	Untreated wastewater from the production of 2,4-D.
K100	Waste leaching solution from acid leaching of emission control dust/sludge from secondary lead smelting.
K101	Distillation tar residues from the distillation of aniline-based compounds in the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds.
K102	Residue from the use of activated carbon for decolorization in the production of veterinary pharmaceuticals from arsenic compounds.
K103	Process residues from aniline extraction from the production of aniline.
K104	Combined wastewater streams generated from nitrobenzene/aniline production.
K105	Separated aqueous stream from the reactor product washing step in the production of chlorobenzenes.
K106	Wastewater treatment sludge from the mercury cell process in chlorine production.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
K107	Column bottoms from product separation from the production of 1,1-dimethylhydrazine (UDMH) from carboxylic acid hydrazines.
K108	Condensed column overheads from product separation and condensed reactor vent gases from the production of 1,1-dimethylhydrazine (UMDH) from carboxylic acid hydrazines.
K109	Spent filter cartridges from product purification from the production of 1,1-dimethylhydrazine (UMDH) from carboxylic acid hydrazines.
K110	Condensed column overheads from intermediate separation from the production of 1,1-dimethylhydrazine (UMDH) from carboxylic acid hydrazines.
K111	Product washwaters from the production of dinitrotoluene via nitration of toluene.
K112	Reaction by-product water from the drying column in the production of toluenediamine via hydrogenation of dinitrotoluene.
K113	Condensed liquid light ends from the (T) purification of toluenediamine in the production of toluenediamine via hydrogenation dinitrotoluene.
K114	Vicinals from the purification of toluenediamine in the production of toluenediamine via hydrogenation of dinitrotoluene.
K115	Heavy ends from the purification of toluenediamine in the production of toluenediamine via hydrogenation of dinitrotoluene.
K116	Organic condensate from the solvent recovery column in the production of toluene diisocyanate via phosgenation of toluenediamine.
K117	Wastewater from the reactor vent gas scrubber in the production of ethylene dibromide via bromination of ethene.
K118	Spent absorbent solids from purification of ethylene dibromide in the production of ethylene dibromide via bromination of ethene.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
K123	Process wastewater (including supernates, filtrates, and wash waters) from the production of ethylenebisdithiocarbamic acid and its salts.
K124	Reactor vent scrubber water from the production of ethylene-bisdithiobarbamic acid and its salts.
K125	Filtration, evaporation, and centrifugation of solids from the production of ethylenebisdithio carbonic acid and its salts.
K126	Baghouse dust and floor sweepings in milling and packaging operations from production or formulation of ethylenebisdithiocarbamic acid and its salts.
K131	Wastewater from the reactor and spent sulfuric acid from the acid dryer from the production of methyl bromide.
K132	Spent absorbent and wastewater separator solids form the production of methyl bromide.
K136	Still bottoms from the purification of ethylene dibromide in the production of ethylene dibromide via bromination of ethene.
K140	Floor sweepings, off-specification product and spent filter media from the production of 2,4,6-tribromophenol.
K141	Process residues from the recovery of coal tar, including, but not listed to, tar collecting sump residues from the production of coke from coal or the recovery of coke by-products produced from coal. This listing does not include K087 (decanter tank tar sludge from coking operations).
K142	Tar storage tank residues from the production of coke from coal or from the recovery of coke by-products produced from coal. This listing does not include K087 (decanter tank tar sludge from coking operations).
K143	Process residues from the recovery of light oil, including, but not limited to, those generated in stills, decanters, and wash oil recovery units from the recovery of coke by-products produced from coal.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
K144	Wastewater treatment sludges from light oil refining, including, but not limited to, intercepting or contamination sump sludges from the recovery of coke by-products produced from coal.
K145	Residues from napthalene collection and recovery operations from the recovery of coke by-products produced from coal.
K147	Tar storage tank residues from coal tar refining.
K148	Residues from coal tar distillation, including, but not limited to, still bottoms.
K149	Distillation bottoms from the production of alpha- (or methyl-) chlorinated toluenes, ring-chlorinated toluenes, benzoyl chlorides, and compounds with mixtures of these functional groups. [This waste does not include still bottoms from the distillation of benzyl chloride.]
K150	Organic residuals, excluding spent carbon adsorbent, from the spent chlorine gas and hydrochloric acid recovery processes associated with the production of alpha- (or methyl-) chlorinated toluenes, ring-chlorinated toluenes, benzoyl chlorides, and compounds with mixtures of these functional groups.
K151	Wastewater treatment sludges, excluding neutralization and biological sludges, generated during the treatment of wastewaters from the production of alpha- (or methyl-) chlorinated toluenes, ring-chlorinated toluenes, benzoyl chlorides, and compounds with mixtures of these functional groups.
K156	Organic waste (including heavy ends, still bottoms, light ends, spent solvents, filtrates, and decantates) from the production of carbamates and carbamoyl oximes.
K157	Wastewaters (including scrubber waters, condenser waters, washwaters, and separation waters) from the production of carbamates and carbamoyl oximes).
K158	Bag house dust, and filter/separation solids from the production of carbamates and carbamoyl oximes.
K159	Organics from the treatment of thiocarbamate wastes.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
K161	Purification solids (including filtration, evaporation, and centrifugation solids), bag house dust, and floor sweepings from the production of dithiocarbamate acids and their salts. (This listing does not include K125 or K126).
K169	Crude oil storage tank sediment from petroleum refining operations.
K170	Clarified slurry oil storage tank sediment and/or in-line filter/separation solids from petroleum refining operations.
K171	Spent hydrotreating catalyst from petroleum refining operations, including guard beds used to desulfurize feeds to other catalytic units (not including inert support media).
K172	Spent hydrorefining catalyst from petroleum operations, including guard beds used to desulfurize feeds to other catalytic units (not including inert support media).
*K174	Wastewater treatment sludge from the production of ethylene dichloride or vinyl chloride monomer.
K175	Wastewater treatment sludge from the production of ethylene dichloride or vinyl chloride monomer.
K181	Non-wastewater from the production of dyes and/or pigments.

D. Discarded Commercial Chemical Products, Off-Specification Species, Container Residues, and Spill Residues Thereof:

Hazardou Waste No	<u></u>
P001	Warfarin, when present at concentrations greater than 0.3%.
P002	1-Acetyl-2-thiourea
P003	Acrolein
P004	Aldrin
P005	Allyl alcohol
P006	Aluminum phosphide
P007	5-(Aminomethyl)-3-isoxazolol

Clean Harbors Svcs Inc

RCRA Log No. B-16R-M-16

Hazardous

<u>Hazardous</u>		
Waste No	o. Description of Hazardous Waste	
`		
P008	4-Aminopyridine	
P009	Ammonium picrate	
P010	Arsenic acid	
P011	Arsenic pentoxide	
P012	Arsenic trioxide	
P013	Barium cyanide	
P014	Benzenethiol	
P015	Beryllium dust	
P016	Bis-chloromethyl) ether	
P017	Bromoacetone	
P018	Brucine	
P020	Dinoseb	
P021	Calcium cyanide	
P022	Carbon bisulfide	
P023	Chloroacetaldehyde	
P024	p-Chloroaniline	
P026	1-(o-Chlorophenyl) thiourea	
P027	3-Chloropropionitrile	
P028	Benzyl chloride	
P029	Copper cyanides	
P030	Cyanides (soluble cyanide salts) not elsewhere specified.	
P031	Cyanogen	
P033	Cyanogen chloride	
P034	4,6-Dinitro-o-cyclohexylphenol	
P036	Dichlorophenylarsine	
P037	Dieldrin	
P038	Diethylarsine	
P039	Disulfoton	
P040	O,O-Diethyl O-pyrazinyl phosphoro-thioate	
P041	Diethyl-p-nitrophenyl phosphate	
P042	Epinephrine	
P043	Diisopropyl fluorophosphate	
P044	Dimethoate	
P045	Thiofanox	
P046	Ethanamine, 1,10dimethyl-2-phenyl-	
P047	4,6-Dinitro-o-cresol and salts	
P048	2,4-Dinitrophenol	
P049	2,4-Dithiobiuret	

Page A-31 of A-40

Clean Harbors Svcs Inc RCRA Log No. B-16R-M-16

Phosgene Phosphine

P095 P096

Hazardous

Waste No	
P050	Endosulfan
P051	Endrin
P054	Ethylenimine
P056	Fluorine
P057	Fluoroacetamide
P058	Fluoroacetic acid, sodium salt
P059	Heptachlor
P060	Hexachlorohexahydro-endo, endo-dimethanonaphthalene
P062	Hexaethyl tetraphosphate
P063	Hydrogen cyanide
P064	Methyl Isocyanate
P065	Mercury fulminate
P066	Methomyl
P067	2-Methylaziridine
P068	Methyl hydrazine
P069	2-Methyllactonitrile
P070	Aldicarb
P071	Methyl parathion
P072	alpha-Naphthylthiourea
P073	Nickel carbonyl
P074	Nickel cyanide
P075	Nicotine and salts
P076	Nitric oxide
P077	p-Nitroaniline
P078	Nitrogen dioxide
P081	Nitroglycerine
P082	N-Nitrosodimethylamine
P084	N-Nitrosomethylvinylamine
P085	Octamethylpyrophosphoramide
P087	Osmium oxide
P088	Endothall
P089	Parathion
P092	Phenylmercuric acetate
P093	N-Phenylthiourea
P094	Phorate

Page A-32 of A-40

Clean Harbors Svcs Inc RCRA Log No. B-16R-M-16

Hazardous

Waste No.	Description of Hazardous	Waste

	•
P097	Pamphur
P098	Potassium cyanide
P099	Potassium silver cyanide
P101	Propanenitrile
P102	Propargyl alcohol
P103	Selenourea
P104	Silver cyanide
P105	Sodium azide
P106	Sodium cyanide
P108	Strychnine and salts
P109	Tetraethyldithiopyrophosphate
P110	Tetraethyl lead
P111	Tetraethylpyrophosphate
P112	Tetranitromethane
P113	Thallic oxide
P114	Thallium(l) selenide
P115	Thallium(l) sulfate
P116	Thiosemicarbazide
P118	Trichloromethanethiol
P119	Vanadic acid, ammonium salt
P120	Vanadium pentoxide
P121	Zinc cyanide
P122	Zinc phosphide
P123	Toxaphene
P127	7-Benzofuranol, 2,3-dihydro-2,2-dimethyl-, methylcarbamate
P128	Phenol, 4-(dimethylamino)-3,5-dimethyl-, methylcarbamate (ester)
P185	1,3-Dithiolane-2-carboxaldehyde, 2,4-dimethyl
	0-[(methylamino)carbonyl]oxime
P188	Benzoic acid, 2-hydroxy, compound with (3aS-cis)-
	1,2,3,3a,8,8a-hexahydro-1,3a,8-trimethylpyrrolo
	[2,3-b]indol-5-yl methylcarbamate ester (1:1)
P189	Carbamic acid, [(dibutylamino)thos]methyl-,
	2,3-dihydro-2,2-dimethyl-7-benzofuranyl ester
P190	Carbamic acid, methyl-, 3-methylphenyl ester
P191	Carbamic acid, dimethyl-, 1-[(dimethylamino
	carbonyl]-5-methyl-1H-pyrazol-3-yl ester

Hazardou	<u>15</u>
Waste No	o. <u>Description of Hazardous Waste</u>
P192	Carbamic acid, dimethyl-, 3-methyl-1-
	(1-methylethyl)-1H-pyrazol-5-yl ester
P194	Ethanimidothioc acid, 2-(dimethylamino)-N-[[(methylamino)
	carbonyl)oxy]-2-oxo-, methyl ester
P196	Manganese, bis(dimethylcarbamodithioato-S,S=)-,
	Manganese dimethyldithiocarbamate
P197	Methanimidamide, N,N-dimethyl-N=-
	[2-methyl-4[[(methylamino)carbony]phenyl]-
P198	Methanimidamide, N,N-dimethyl-N=-[3-[[(methylamino)
	carbonyl]oxylphenyl]-, monohydrochloride
P199	Phenol, (3,5-dimethyl-4-(methylthio)-, methylcarbamate
P201	Phenol, 3-methyl-5-(1-methylethyl)-, methyl carbamate
P202	Phenol, 3-(1-methylethyl)-, methyl carbamate
	3-lsopropylphenyl N-meethylcarbamate orm-Cumenyl methylcarbamate
P203	Propanal, 2-methyl-2-(methysulfonyl)-,
1 203	0-[(methylamino)carbonyl] oxime
P204	Pyrrolo[2,3-b]indol-5-ol, 1,2,3,3a,8,8a-hexahydro-1,
1207	3a,8-trimethyl-, methylcarbamate (ester), 3aS-cis)-
P205	Zinc, bis(dimethylcarbamodithioato-S,S=)-, (T-4)-

E. Commercial Chemical Products, Manufacturing Chemical Intermediates, or Off-Specification Commercial Chemical Products:

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
U001	Acetaldehyde
U002	Acetone
U003	Acetonitrile
U004	Acetophenone
U005	2-Acetylaminofluorene
U006	Acetyl chloride
U007	Acrylamide
U008	Acrylic acid
U009	Acrylonitrile
U010	Mitomycin C

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
U011	Amitrole
U012	Aniline
U014	Auramine
U015	Azaserine
U016	Benz(c)acridine
U017	Benzal chloride
U018	Benz(a)anthracene
U019	Benzene
U020	Benzenesulfonyl chloride
U021	Benzidine
U022	Benzo(a)pyrene
U023	Benzotrichloride
U024	Bis(2-chloroethyoxy) methane
U025	Dichloroethyl ether
U026	Chloronaphazine
U027	Bis(2-chloroisopropyl) ether
U028	Bis(2-ethylhexyl) phthalate
U029	Bethyl bromide
U030	Benzene, 1-bromo-4-phenoxy-
. U031	N-Butyl alcohol
U032	Calcium chromate
U033	Carbonyl fluoride
U034	Chloral
U035	Chlorambucil
U036	Chlordane, technical
U037	Chlorobenzene
U038	Ethyl 4,4'-dichlorobenzilate
U039	4-Chloro-m-cresol
U041	1-Chloro-2,3-epoxypropane
U042	2-Chloroethyl vinyl ether
U043	Vinyl chloride
U044	Chloroform
U045	Methyl chloride
U046	Chloromethyl methyl ether
U047	beta-Chloronaphthalene
U048	o-Chlorophenol
U049	Benzenamine, 4-chloro-2-methyl-

Hazardous	
Waste No.	Description of Hazardous Waste
U050	Chrysene
U051	Creosote
U052	Cresols
U053	Crotonaldehyde
U055	Cumene
U056	Cyclohexane
U057	Cyclohexanone
U058	Cyclophosphamide
U059	Daunomycin
U060	DDD
U061	DDT
U062	Diallate
U063	Dibenz[a,h]anthracene
U064	Dibenz[a,i]pyrene
U066	1,2-Dibromo-e-chloropropane
U067	Ethylene dibromide
U068	Methylene bromide
U069	Dibutyl phthalate
U070	o-Dichlorobenzene
U071	m-Dichlorobenzene
U072	p-Dichlorobenzene
U073	3-3'Dichlorobenzidine
U074	1,4-Dichloro-2-butene
U075	Dichlorodifluoromethane
U076	Ethylidene dichloride
U077	Ethylene dichloride
U078	1,1-Dichloroethylene
U079	1,2-Dichloroethylene
U080	Methylene chloride
U081	2,4-Dichlorophenol
U082	2,6-Dichlorophenol
U083	1,2-Dichloropropane
U084	1,3-Dichloropropane
U085	1,2:3,4-Diepoxybutane
U086	N,N-Diethylhydrazine
U087	o,o-Diethyl-S-methyl-dithiophosphate
U088	Diethyl phthalate

Hazardous	
Waste No.	Description of Hazardous Waste
U089	Diethylstilbestrol
U090	Dihydrosafrole
U091	3,3'-Dimethoxybenzidine
U092	Dimethylamine
U093	Dimethylaminoazobenzene
U094	7,12-Dimethylbenz[a]anthracene
U095	3,3'-Dimethylbenzidine
U096	Alpha,alpha-Dimethylbenzyhlydro-peroxide
U097	Dimethylcarbamoyl chloride
U098	1,1-Dimethylhydrazine
U099	1,2-Dimethylhydrazine
U101	2,4-Dimethylphenol
U102	Dimethyl phthalate
U103	Dimethyl sulfate
U105	2,4-Dinitrotoluene
U106	2,6-Dinitrotoluene
U107	Di-n-octyl phthalate
U108	1,4-Dioxane
U109	1,2-Diphenylhydrazine
U110	Dipropylamine
U111	Di-N-propylnitrosamine
U112	Ethyl acetate
U113	Ethyl acrylate
U114	Ethylenebis(dithiocarbamic acid), salts and esters
U115	Ethylene oxide
U116	Ethylene thiourea
U117	Ethyl ether
U118	Ethyl methacrylate
U119	Ethyl methanseulfonate
U120	Fluoranthene
U121	Metane, trichlorofluoro-
U122	Formaldehyde
U123	Formic acid
U124	Furan
U125	Furfural
U126	Glycidylaldehyde
U127	Hexachlorobenzene

RCRA Log No. B-16R-M-16

Hazardous Waste No.	Description of Hazardous Waste
U128	Hexachlorobutadene
U129	Lindane
U130	Hexachlorcyclopentadene
U131	Hexachloroethane
U132	Hexachlorophene
U133	Hydrazine
U134	Hydrogen fluoride
U135	Hydrogen sulfide
U136	Cacodylic acid
U137	Indeno[1,2,3-cd]pyrene
U138	Iodomethane
U140	Isobutyl alcohol
U141	Isosafrole
U142	Kepone
U143	Lasiocarpine
U144	Lead acetate
U145	Lead phosphate
U146	Lead subacetate
U147	Maleic anhydride
U148	Maleic hydrazide
U149	Malononitrile
U150	Melphalan
U151	Mercury
U152	Methacrylonitrile
U153	Methanethiol
U154	Methanol
U155	Methapyrilene(T)
U156	Methyl chlorocarbonate
U157	3-Methylchlolanthrene
U158	4,4'-Methylenebis(2-chloroaniline)
U159	Methyl ethyl ketone
U160	Methyl ethyl ketone peroxide
U161	Methyl isobutyl ketone
U162	Methyl methacrylate
U163	N-methyl-N'nitro-N-nitrosoquanidine
U164	Methylthiouracil
U165	Napthalene

<u>Hazardous</u>	
Waste No	Description of Hazardous Waste
U166	1,4-Naphthalenedione
U167	1-Naphthylamine
·U168	2-Naphthylamine
U169	Nitrobenzene
U170	p-Nitrophenol
U171	2-Nitropropane
U172	N-Nitrosodi-n-butylamine
U173	N-Nitrosodiethanolamine
U174	N-Nitrosodiethylamine
U176	N-Nitroso-N-ethylurea
U177	N-Nitroso-N-methylurea
U178	N-Nitroso-N-methylurethane
U179	N-Nitrosopiperidine
U180	Nitrosopyrrolidine
U181	5-Nitro-o-toluidine
U182	Paraldehyde
U183	Pentachlorobenzene
U184	Pentachloroethane
U185	Pentachloronitrobenzene
U186	1,3-Pentadiene
U187	Phenacetin
U188	Phenol
U189	Phosphorous sulfide
U190	Phthalic anhydride
U191	Pyridine, 2-methyl-
U192	Pronamide
U193	1,3-Propane sultone
U194	1-Propanamine
U196	Pyridine
U197	p-Benzoquinon
U200	Reserpine
U201	Resorcinol
U202	Saccharin and salts
U203	Safrole
U204	Selenium dioxide
U205	Selenium disulfide
U206	Streptozotocin

Clean Harbors Svcs Inc

RCRA Log No. B-16R-M-16

<u>Hazardous</u> Waste No.	Description of Hazardous Waste
U207	1,2,4,5-Tetrachlorobenzene
U208	1,1,1,2,-Tetrachloroethane
U209	1,1,2,2,-Tetrachloroethane
U210	Tetrachloroethylene
U211	Carbon tetrachloride
U213	Tetrahydrofuran
U214	Thallium(l) acetate
U215	Thallium(l) carbonate
U216	Thallium(l) chloride
U217	Thallium(l) nitrate
U218	Thioacetamide
Ú 219	Thiourea
U220	Toluene
U221	Toluenediamine
U222	o-Toluidine hydrochloride
U223	Toluene hydrochloride
U225	Bromoform
U226	1,1,1-Trichloroethane
U227	1,1,2-Trichloroethane
U228	Trichloroethene
U234	sym-Trinitrobenzene
U235	Tris(2,3-dibromopropyl) phosphate
U236	Trypan blue
U237	Uracil mustard
U238	Ethyl carbarmate (urethan)
U239	Xylene
U240	2,3-D, salts and esters
U243	Hexachloropropene
U244	Thiram
U246	Bromine cyanide
U247	Methoxychlor
·U248	Warfarin, when present at concentrations of 0.3% or less
U249	Zinc phosphide, when present at concentrations of 10% or less
U271	Carbamic acid, [1-[(butylamino)carbonyl]-1H-
	benzimidazol-2-yl]-, methyl ester
U278	1,3-Benzodioxol-4-ol, 2,2-dimethyl-, methyl carbamate
U279	1-Naphthalenol, methylcarbamate

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
U280	Carbamic acid, (3-chlorophenyl)-, 4-chloro-2-butynyl ester
U328	o-Toluidine
U353	p-Toluidine
U359	Ethylene glycol monoethyl ether
U364	1,3-Benzodioxol-4-ol, 2,2-dimethyl-,
U367	7-Benzofuranol, 2,3-dihydro-2,2-dimethyl-
U372	Carbamic acid, 1 H-benzimidazol-2-yl, methyl ester
U373	Carbamic acid, phenyi-, 1 -methylethyl ester
U387	Carbamothioic acid, dipropyl-, S-(phenylmethyl) ester
U389	Carbamothioic acid, bis(1-methylethyl)-
•	S-(2,3,3-trichloro-2-propenyl) ester
U394	Ethanimidothioic acid, 2-(dimethylamino)-N-hydroxy-2-oxomethyl ester
U395	Ethanol, 2,2'-oxybis-, discarbamate
U404	Ethanamine, N,N-diethyl-
U409	Carbamic acid, [1,2-phenylenebis(iminocarbonothioyl)]bis, dimethyl ester
U410	Ethanimidothioc acid, N,N=- [thiobis(methylimimo)carbonyloxy]bis-,dimethyl ester
U411	Phenol, 2-(1-methylethoxy)-, methylcarbamate

SFN:WRW:bjh\051161s.doc

^{*}These hazardous waste codes are permitted only for storage and transfer, not fuel blending.

¹These hazardous waste codes are not permitted for shredding.

²These hazardous waste codes are the only codes permitted for lamp crushing.

ATTACHMENT B

INSPECTION SCHEDULE

LPC 0316000051

Clean Harbors Svcs Inc

RCRA Log No. 16R

Table I: General Inspection Schedule Security Devices

ITEM Fence	INSPECTION ELEMENT/TYPE OF PROBLEM Inspect entire perimeter for breaches or damage	INSPECTION FREQUENCY Daily
Gates	. Check for proper gate lock function	Daily
Warning Signs	. Check for presence of warning signs	Daily
Lighting System (indoor/outdoor)	. Check lights for operability	Daily
Lighting System (Emergency)	. Check lights for operability	Monthly

Table II: General Inspection Schedule, Safety & Emergency Equipment

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Protective Gear (e.g., Helmets, Face	. Check accessibility	Daily
Shields, Goggles, Boots, Gloves, Acid	. Check for adequate supply	Daily
Resistant Clothing, Disposable Suits, Disposable Bags)	. Check for deterioration, damage	Daily
Breathing Apparatus	. Check for accessibility	Daily
	. Check for adequate supply, full charge on canisters, and all air tanks	Daily
	. Check for deterioration and damage	Daily

<u>ITEM</u>	<u>IN</u>	SPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Breathing Apparatus (continued)	•	Check for function	Monthly
First Aid Kits	٠	Check accessibility	Daily
	•	Check for adequate supply	Daily
Emergency Showers	•	Check that units activate and shut off properly	Daily
	•	Check accessibility	Daily
Water Lines	•	Check for adequate pressure	Monthly
Internal (Phone or Radio)/External	٠	Check accessibility	Daily
(Phone) Communications Systems	.	Check for operations	Daily
	•	Test cellular phones	Monthly
Fire Extinguishers	•	Check pressure gauge for full charge indication	Monthly
	•	Check inspection tag to insure annual maintenance by outside fire service is up-to-date	Monthly
	•	Check seal to ensure no one has used extinguisher	Monthly
	•	Check to ensure access to units is not blocked	Daily

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Fire Suppression	. Check for accessibility	Daily
System (Monitors, Pull Stations, Alarms)	. Test fire alarm warning systems	Monthly
	. Test Foam Supply	Annually
Absorbent Supply	. Check for adequate supply	Daily
Recovery Drums	. Check for adequate supply	Daily
Other Emergency and Decontamination	. Check accessibility	Daily
Equipment Equipment	. Check for adequate supply	Daily
	. Check for deterioration/damage	Daily
Respirators and Cartridges	Check for adequate supply	Daily
Fire Suppression System	Verify lack of combustible material and arrangement of room (e.g. unobstructed aisles) in the following valve rooms:	Daily
	a. Shed west of truck scale;	
	b. Shed at northeast corner of truck farm; and	• •
	c. Shed east of Unit 61.	
Water based fire suppression systems including sprinklers, monitors, foam water sprinkler systems, foam water deluge systems, foam maker suppression systems, fire pumps,	Inspect and test these items in accordance with the requirements, protocols, and frequencies specified in the current editions of NFPA 11, NFPA 16, NFPA 16A, NFPA 20, NFPA 22, NFPA 24 and NFPA 25	At Least Annually

ITEM

INSPECTION ELEMENT/TYPE OF PROBLEM

INSPECTION FREQUENCY

water supply, storage tanks, underground piping, and foam concentrate supply and proportioning systems.

Fire alarm and detection system, including all detection devices Inspect and test these items in accordance with the requirements, protocols and frequencies specified in the current edition of NFPA72.

At Least Annually

Foam Proportioning System

The system must be inspected by manufacturer's representative in conjunction with form concentrate testing to verify that there is no unusual interaction between the form concentrate and foam proportioning equipment. The permittee must report any degradation of the system to IEPA. The permittee must make arrangements to resolve any deficiencies for both the short term and log term operation of the facility.

Annually

All fire protection Equipment and Systems The permittee must compare future test results for all fire protection equipment and systems to the data obtained during the 1995 acceptance testing, and document the comparison. The permittee must report any discrepancies to IEPA. The permittee must resolve the discrepant condition or provide an explanation as to the nature of the discrepancy and proposed solution, and report to IEPA.

Annually

Table III: Tank Farm Inspection Schedule

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Storage Tanks Containment Area	. Check for evidence of spilled materials on floor and collection sump	Daily
	Check for cracks and gaps in, or damage to containment base, sumps and drains, and their coatings.	Daily
	Check for evidence of seepage outside containment (e.g. discoloration)	Daily
	. Check for debris, cleanup residue, improperly stored equipment	Daily
Storage Tanks	. Inspect tank exterior for cracks, leaks, discoloration, and obvious deformation	Daily
	. Check tank integrity	Annually
Access Hatches, Vents, and Sampling	. Check for leaks	Daily
Ports	. Check for damage	Daily
Fill/Drain and Overflow Piping	Inspect piping, elbows, sampling ports, gauge taps, etc. for leaks and corrosion	Daily
	. Inspect valve seals for leaks	Daily
	Check that handles are not bent or damaged	Daily
	. Inspect heat tracing lines for signs of deterioration or damage	Daily

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Liquid Levels Monitors	. Check if operators log book is up to date	Daily
	. Check tank liquid level indicators for operability	Daily
	. Check containment sump liquid level indicators for operability	Daily
All Ancillary Equipment (e.g.	. Visual inspection for leaks and corrosion	Daily
pumps, filter baskets, manifolds)	. Conduct leak test or approved integrity assessment	Annually
Control/Monitoring Equipment	 Maintenance inspection Tank Level Monitors Containment Sump Floats High/Low Level Alarms High/Low Pressure Switches and Alarms Nitrogen Blanket Supply System 	Per mfg. recommendations, but at least monthly
Flame Arrestors, Conservation Vents, Emergency Vents	. Check for obstruction or other damage	Annually
Carbon Absorption Canisters	. Check that units are functional and that valves are properly positioned	Daily
	. Check carbon bed for organic breakthrough	Daily
Tank Truck Loading/ Unloading Area	. Check for evidence of spills or releases in unloading area	Daily
	. Check for removal of spill absorbent and cleanup materials	Daily

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Tank Truck Loading/ Unloading Area (continued)	. Check sump, grating and curbs for cracks or other damage	Daily
,	Inspect hoses for deterioration or leakage	Daily
	. Inspect hose couplings and valves for leakage	Daily
	Inspect containment system for deterioration	Daily
	Inspect grounding system equipment for operability	Daily

Table IV: Container Storage Area Inspection Schedule

ITEM	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Container Storage Area	Check for evidence of spilled material on slab, ramps, drains, sumps	Daily
	. Check for removal of absorbent materials and cleanup rags	Daily
	. Check for, cracks and gaps in, or damage to, containment bases, sump and drains and coatings	Daily
	. Check for erosion, uneven settlement, etc.	Daily
	. Check for corrosion of grating over drains and sumps	Daily

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Container Storage Area (continued)	. Check for condition and availability of overpack containers	Monthly
Stored Containers	Check for drums being in good condition	Daily
	. Check that drums are not open	Daily
	. Check for proper placement	Daily
	. Check adequacy of aisle space	Daily
•	. Check height of stacks	Daily
	. Check storage capacity not exceeded	Daily
	. Check for proper labeling	Daily
Container Loading/ Unloading Area	. Check for damaged containers	Daily
Olloading Area	. Check for evidence of spilled material on slab and ramps used	Daily
	Check for removal of used absorbent and cleaning materials	Daily
	. Check for prompt container removal from receiving area	Daily
*	Inspect grounding system equipment for operability	Daily
	. Check forklifts for proper operation and accumulation of residue	Each Operating Shift

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Containers from the Pegasus System	Inspect ten (10) consecutive containers prior to crushing to insure that they are RCRA empty	Monthly or per the schedule submitted as part of the comments on the draft permit dated 6/3/95

Table V: Miscellaneous Unit Area Inspection Schedule

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Miscellaneous Unit	Inspect unit for leaks visually	Daily when unit in use
	Inspect unit for leaks (emissions) visually (shredder and compactor only)	Annually
Control/Monitoring Equipment	Flow indicator sensor pressure measurement device recommendations,	Per mfg.
	(shredder and compactor only)	but at least monthly
Carbon Absorption Canisters	Check that units are functional and that valves are properly positioned	Daily when unit in use
	Check carbon bed for breakthrough	Daily when unit in use
Lamp Crusher Only	Ensure fan is operational	Daily when unit in use, before operating

All receptacles are properly positioned And have secure connection rings

Daily when unit in use, before Operating

Each receptacle of co-products shall be Inspected for cross-contamination

Daily when unit in use

SFN:WRW:bjh\051161s.doc

ATTACHMENT C

CONSTRUCTION CERTIFICATION FORM AND INSTRUCTIONS

Clean Harbors Svcs Inc

LPC 0316000051

RCRA Log No. B-16R

CONSTRUCTION CERTIFICATION

This statement is to be completed by both the responsible officer and the registered professional engineer upon completion of construction in accordance with 35 IAC Section 702.126. Submit one copy of the certification with original signatures and two additional copies (four additional copies for UIC wells). Forward these certification statements and any information required by the permit to the following address:

Illinois Environmental Protection Agency Bureau of Land - #33 Permit Section 1021 North Grand Avenue East Post Office Box 19276 Springfield, Illinois 62794-9276

IEPA SITE CODE:	_
U.S. EPA ID NO.: IL	
PART B PERMIT LOG #/UIC PERMIT #:	
PERMIT (OR MODIFICATION) ISSUANCE DATE	E:
PERMIT CONDITION NO. REQUIRING CERTIFI	CATION:
penalty of law that this document and all attachments system designed to assure that qualified personnel pr of the person or persons who manage the system, or information submitted is, to the best of my knowledge	een constructed in accordance with the specifications in the Part B/UIC accordance with the permit is contained in the enclosed report. I certify under swere prepared under my direction or supervision in accordance with a operly gather and evaluate the information submitted. Based on my inquiry those persons directly responsible for gathering the information, the se and belief, true, accurate, and complete. I am aware that there are including the possibility of fine and imprisonment for knowing violations.
Signature of Owner/Operator	Name and Title
Signature of Registered P.E.	Name of Registered P.E. and
	Illinois Registration Number
Date	

DATE:

February 23, 1996

TO:

Facilities Permitted Under the IEPA RCRA and UIC Programs

FROM:

DLPC Permit Section

SUBJECT:

Certification Documentation for Construction Required by IEPA-Issued Permits

When submitting certification required by a Part B or UIC permit for construction of any newly developed areas or units, please complete the attached certification form. Modifications to the construction of UIC wells should be certified with this form, but the installation of groundwater monitoring wells does not require this certification (unless specifically required by the permit). This will help to ensure that the submittal reaches its proper destination and that the certification will meet the regulatory requirements. Sending the Field Operations Section (F.O.S.) copy directly to the Field Office is acceptable as long as all copies have a completed copy of the enclosed form attached and you advise the Permit Section, in writing, that a copy has been sent to F.O.S.

A documentation report and as-built drawings (sealed and signed by an Illinois Professional Engineer) must be included with this certification. Information necessary to document the construction of the unit or area and to support the certification must be contained within the report. This report should include a thorough description of all construction data and drawings and should be formatted in a logical and orderly manner. The construction documentation report must contain at least the following items:

- 1. An introduction and summary which describes the scope and purpose of the project;
- 2. A description of all construction activities, including quality assurance and quality control;
- 3. As-built drawings of the area or unit and a description of any deviations from the plans and specifications approved in the permit;
- A description of the test methods used and justification for any deviations from standard test methods;
- 5. A summary of test results, identification of any samples which did not meet the specifications and the corrective action and retesting which was undertaken in response to any failing test results;
- 6. Any necessary information associated with construction of the area or unit to document that construction was in accordance with the plans and specifications approved by the permit;
- 7. Information specifically required by the permit; and
- 8. Any available photographs of the area or unit.

If you have any questions, please contact a member of the DLPC Permit Section at 217/782-6762.

SFN:WRW:bjh\051161s.doc

Enclosure

ATTACHMENT D CLOSURE CERTIFICATION FORM

LPC 0316000051

Clean Harbors Svcs Inc

This statement is to be completed by both the responsible officer and by the registered professional engineer upon completion of closure. Submit one copy of the certification with original signatures and three additional copies.

Closure Certification Statement

The hazardous waste management units at the facility described in this document have been closed in accordance with the specifications in the Agency approved closure plan. I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

USEPA ID Number	Facility Name
Signature of Owner/Operator	Name and Title
Signature of Registered P.E.	Name of Registered P.E. and Illinois Registration Number
Date SFN:WRW:bjh\051161s.doc	

ATTACHMENT E

APPROVED PERMIT SECTION IDENTIFICATION

Clean Harbors Svcs Inc

LPC 0316000051

RCRA Permit Log No. B-16R

	<u>Title</u>	Latest Revision Date
SECT	ION A RCRA PART A APPLICATION [EPA FORM 8700-23 (01-90)]	10/21/04
SECT	ION B FACILITY DESCRIPTION	
B-1	General Description	01/31/04
B-2	Topographic Map	04/19/03
B-3	Location Requirements	04/19/03
B-4	Traffic Information	04/19/03
B-5	Operating Record	01/31/04
B-6	Solid Waste Management Units	01/31/04
SECT	TION C - WASTE CHARACTERISTICS	
C-1	Chemical and Physical Analysis	04/19/03
	C-1(i) Activities Exempt from RCRA	04/19/03
(C-1(ii) Hazardous Waste Activities Regulated Under RCRA	03/15/04
(C-1(iii) Detailed Description of RCRA Hazardous Wastes Activities	03/15/94
•	C-1a Containerized Waste	03/15/04
(C-1b Waste in Tank Systems	03/15/04
C	C-1d Landfilled Waste	04/19/03

<u>Title</u>		Latest Revision Date	
	C-1e	Wastes Incinerated and Used in Performance Tests	04/19/03
	C-1f	Wastes to be Land Treated	04/19/03
C-2	Waste	Analysis Plan	03/15/04
	C-2a	Parameters and Rationale	03/15/04
	C-2a(1)	Waste Pre-qualification Procedures	03/15/04
	C-2a(2)	Conformance Testing	01/31/04
	C-2a(3)	Process Operation and Compatibility Testing	01/31/04
	C-2b	Test Methods	01/31/04
	C-2c	Sampling Methods	10/07/04
	C-2d	Frequency of Analysis	10/07/04
	C-2e	Additional Requirements for Wastes Generated Off-Site	10/07/04
	C-2e(1)	Bulk Transport Receiving Procedures	10/07/04
	C-2e(2)	Container Receiving Procedures	04/19/03
	C-2e(3)	Lab Packed Waste Receiving Procedures	04/19/03
	C-2e(4)	General Waste Acceptance Criteria	04/19/03
	C-2e(5)	Nonconformance	04/19/03
	C-2e(6)	Rejected Loads	04/19/03

<u>Title</u>	Latest Revision Date
C-2f Additional Requirements for Ignitable, Reactive or Incompatible Wastes	. 04/19/03
C-2g Waste Analysis Requirements for Land Disposal Restrictions (LDR)	01/31/04
C-3 Quality Assurance	01/31/04
SECTION D PROCESS INFORMATION	
Introduction	
D-1 Containers	······
D-1(i) Drum Container Storage Activities	03/15/04
D-1(ii) Bulk Solids (Rolf) Container Management Activities	04/19/03
D-1(iii) Hazardous Waste Transporter Storage/Staging	04/19/03
D-1(iv) Other RCRA-Regulated Container Management Activities	10/21/04
D-1(v) RCRA – Exempt Container Management Activities	04/19/03
D-1a Containers With Free Liquids	04/19/03
D-1a(1) Description of Containers	04/19/03
D-1a(2) Container Management Practices	01/31/04
D-1a(3) Secondary Containment System Design and Operation	04/19/03
D-1a(3)(a) Requirement for the Base or Liner to Contain Liquids	01/31/04

	<u>Titl</u>	<u>e</u> <u>La</u>	test Revision Date
	D-1	a(3)(b) Containment System Drainage	01/31/04
	D-1	a(3)(c) Containment System Capacity	04/19/03
	D-1	a(3)(d) Control of Run-On	01/31/04
	D-1	a(3)(e) Removal of Liquids from Containment System	04/19/03
•	D-1	b Containers Without Free Liquids	04/19/03
D-2	Tank S	Systems	01/31/04
	D-2a(1)	Existing Tank System's	04/19/03
	D-2b	New Tank Systems	04/19/03
	D-2c	Dimensions and Capacity of Each Tank	04/19/03
	D-2d	Description of Feed Systems, Safety Cutoff, Bypass Systems and Pressure Controls	04/19/03
	D-2e	Diagram of Piping, Instrumentation and Process Flow for Each Tank System	04/19/03
	D-2f	Containment and Detection of Releases	04/19/03
	D-2g	Controls and Practices to Prevent Spills and Overflows	04/19/03
D-3	Waste	Piles	. 04/19/03
D-4	Surface	e Impoundments	04/19/03
D-5	Trial B	Burns	04/19/03
D-6	Landfi	lls	04/19/03

	<u>Titl</u>	<u>e</u>	Latest Revision Date
D-7	Land 7	Freatment	04/19/03
D-1	0 Miscel	laneous Units	04/19/03
SEC	CTION E -	- GROUNDWATER MONITORING	11/11/04
SEC	CTION F	PROCEDURES TO PREVENT HAZARDS	
F-1	Securi	ty	
	F-1a	Security Procedures and Equipment	04/19/03
	F-1a(1)	24-hour Surveillance System	04/19/03
• •	F-1a(2)	Barrier and Means to Control Entry	04/19/03
	F-1a(2)(a	ı)Barrier	04/19/03
	F-1a(2)(t	o)Means to Control Entry	04/19/03
	F-1a(3)	Warning Signs	04/19/03
	F-1b	Waiver	04/19/03
F-2	Inspec	tion Schedule	04/19/03
	F-2a	General Inspection Requirements	07/15/94
	F-2b	Specific Process Inspection Requirements	07/15/94
	F-2b(1)	Container Inspection	07/15/94
	F-2b(2)	Tank System Inspections	07/15/94
	F-2b(2)(a	a)Tank Construction Materials	01/19/95

	<u>Title</u>		Latest Revision Date
	F-2b(2)(b)	Tank Surrounding Area	01/19/95
	F-2b(2)(c)	Tank Overfilling Control Equipment	01/19/95
	F-2b(2)(d)	Tank Monitoring Data	. 01/19/95
	F-2b(2)(e)	Tank Level of Waste	04/19/03
	F-2b(2)(f)	Tank Condition Assessment for Unretrofitted Tanks	04/19/03
	F-2b(3)	Waste Pile Liner Inspection	04/19/03
	F-2b(4)	Waste Pile Inspection	04/19/03
ě	F-2b(5)	Surface Impoundment Inspection	04/19/03
	F-2b(6)	Incinerator Inspection	04/19/03
	F-2b(7)	Landfill Inspection	04/19/03
	F-2b(8)	Land Treatment Facility Inspection	04/19/03
F-3		or Documentation of Preparedness vention Requirements	
	F-3a	Equipment Requirements	
	F-3a(1)	Internal Communications	04/19/03
	F-3a(2)	External Communications	04/19/03
	F-3a(3)	Emergency Equipment	04/19/03
	F-3a(4)	Water for Fire Control	04/19/03
	F-3b	Aisle Space Requirements	04/19/03

<u>Title</u>		Latest Revision Date	
F-4	Preven	tive Procedures, Structures and Equipment	
	F-4a	Unloading Operations	04/19/03
	F-4b	Run-Off	04/19/03
	F-4c	Water Supplies	04/19/03
	F-4d	Equipment and Power Failure	04/19/03
	F-4e	Personnel Protection Equipment	04/19/03
F-5	Preven	tion of Reaction of Ignitable, Reactive or Incompatil	ble Wastes
	F-5a	Precautions to Prevent Ignition or or Reaction of Ignitable or Reactive Wastes	04/19/03
	F-5b	General Precautions for Handling Ignitable or Reactive Waste and Mixing of Incompatible Waste	01/19/95
	F-5c	Management of Ignitable or Reactive Wastes in Containers	03/15/04
	F-5d	Management of Incompatible Wastes in Containers	03/15/04
	F-5e	Management of Ignitable or Reactive Wastes in Tank Systems	01/31/04
	F-5f	Management of Incompatible Wastes in Tank Systems	01/19/95
	F-5g	Management of Ignitable or Reactive Wastes Placed in Waste Piles	01/19/95
	F-5h	Management of Incompatible Wastes Placed in Waste Piles	01/19/95

<u>Title</u>		Latest Revision Date	
• • • • • • • • • • • • • • • • • • •	F-5i	Management of Ignitable or Reactive Wastes in Surface Impoundments	01/19/95
	F-5j	Management of Incompatible Wastes Placed in Surface Impoundments	. 01/19/95
	F-5k	Management of Ignitable or Reactive Wastes in Landfills	01/19/95
	F-51	Management of Incompatible Wastes Placed in Landfills	01/19/95
	F-5m	Management of Ignitable or Reactive Wastes in Land Treatment Units	01/19/95
	F-5n	Management of Incompatible Wastes Placed in Land Treatment Units	01/19/95
SEC	CTION G	CONTINGENCY PLAN	
G-1	Genera	l Information	03/15/04
G-2	Emerg	ency Coordinators	12/23/99
G-3	Implen	nentation	12/23/99
G-4	Emerge	ency Response Procedures	
	G-4a	Notification to Federal, State, and Local Officials	. 10/14/96
	G-4b	Identification of Hazardous Materials	. 04/05/99
	G-4c	Assessment	04/05/99
	G-4d	Control Procedures	04/05/99

٠.	<u>Titl</u>	<u>e</u> <u>I</u>	atest Revision Date
	G-4d(1)	Fire and/or Explosion	07/15/94
	G-4d(2)	Release to Air, Soil, or Surface Water	10/14/96
	G-4d(3)	Equipment Failure or Power Outages	10/14/96
	G-4e	Prevention of Recurrence or Spread of Fires, Explosions or Releases	10/14/96
	G-4f	Storage and Treatment of Released Material	10/14/96
	G-4g	Incompatible Waste	10/14/96
	G-4h	Post Emergency Equipment Maintenance	10/14/96
-	G-4i	Container Spills and Leaks	10/14/96
	G-4j	Tank System Spills and Leaks	10/14/96
	G-4j(1)	Tank System Spills and Leakage	10/14/96
	G-4j(2)	Spills and Leaks from Tanks Containing Particular Chlorinated Dioxins, Dibenzofurans, and Phenols	10/14/96
	G-4k	Waste Pile Spills and Leakage	10/14/96
	G-41	Surface Impoundment Spills and Leakage	10/14/96
	G-4m	Incinerator Spills and Leakage	10/14/96
·	G-4n	Landfill Leakage	04/05/99
G-5	Emerg	ency Equipment	10/14/96
G-6	Coordi	nation Agreement Requirements	10/14/96
G-7	Evacua	ation Plan	04/05/99

	<u>Titl</u>	<u>e</u> <u>L</u> :	atest Revision Date
G-8	Requir	ed Reports	10/14/96
SEC	CTION H	PERSONNEL TRAINING	
H-1	Outlin	e of the Training Program	. 04/19/03
	H-1a	Job Title/Job Description	. 01/31/04
	H-1b	Training Content	01/31/04
	H-1c	Training Director	01/31/04
	H-1d	Relevance of Training to Job Position	. 01/31/04
	H-le	Training for Emergency Response	. 01/31/04
H-2	Impler	nentation of Training Program	04/19/03
SEC	CTION I -	- CLOSURE AND POST-CLOSURE REQUIREME	NTS
I-1	Closur	re Plans	
	I-1a	Closure Performance Standard	04/19/03
	I-1b	Partial Closure Activities	04/19/03
	I-1c	Maximum Waste Inventory	04/19/03
	I-1d	Inventory Removal, Disposal, or Decontamination of Equipment,	
		Structures, and Soils04	1/19/03
	I-1d(1)	Closure of Containers	04/19/03
	I-1d(2)	Closure of Tank Systems	04/19/03

	Title	<u> </u>	Latest Revision Date
	I-1d(3)	Closure of Waste Piles	04/19/03
	I-1d(4)	Closure of Surface Impoundments	. 04/19/03
	I-1d(5)	Closure of Incinerators	. 04/19/03
	I-1d(6)	Closure of Land Treatment Facilities	04/19/03
	I-1e	Closure of Disposal Units	04/19/03
	I-1f	Schedule for Closure	. 04/19/03
	I-1g	Extensions of Closure Time	. 04/19/03
I-2	Post-C	losure Plan	04/19/03
I-3	Notice	in Deed and Certification	04/19/03
I-4	Closure	e Cost Estimate	04/19/03
I-5	Financ	ial Assurance Mechanism for Closure	04/19/03
I-6	Post Cl	losure Cost Estimate	04/19/03
I-7	Financi	ial Assurance Mechanism for Post Closure	04/19/03
I-8	Liabilit	ty Requirements	04/19/03
I-9	State M	lechanism	04/19/03
SEC	CTION J -	- OTHER FEDERAL LAWS	04/19/03
SEC	CTION K	PART B CERTIFICATION	
K-1	Facility	Certification	04/19/03

	<u>Titl</u>	<u>le</u>	Latest Revision Date
K-2	Engine	eering Certification	04/19/03
SECT	ION L	CONTINUING RELEASES AT PERMITTED F	ACILITIES
L-1	Solid '	Waste Management Units	04/19/03
L-2	Releas	ses	04/19/03
		- RESEARCH, DEVELOPMENT, AND RATION PERMITS	04/19/03
SECT	ION N	RCRA PART B CERTIFICATION	11/11/04
	_	PRIOR CONDUCT CERTIFICATIONS ITY COMPLIANCE HISTORY	04/19/03
Sectio	n AA	Air Emissions Standards For Process Vents	. 04/19/03
Sectio	n BB	Determination of Applicability to the CHSI Facility.	01/31/04
Sectio	n CC	Air Emission Standards for Tanks, Surface Impoundments and Containers	. 04/19/03
<u>List o</u>	<u>List of Tables</u> <u>Latest Revision Date</u>		
B-1.	Map R	Requirements	07/15/94
C-1.		ry Treatment Using Chemical tion, Coagulation,	
		ation	07/15/94
C-2.	Pretre	atment Using Neutralization	07/15/94

<u>List of Tables</u>		Latest Revision Date
C-3. Pretre	eatment Using Chemical Oxidation	07/15/94
C-4. Pretre	eatment Using Chemical Reduction	07/15/94
C-5. Pretre	eatment by Other Methods	07/15/94
Č-1a.	Primary Treatment of Non-Hazardous Wastes Using Chemical Precipitation,, Coagulation, and Filtration	. 07/15/94
C-2a.	Pretreatment of Non-Hazardous Wastes Using Neutralization	07/15/94
C-3a.	Pretreatment of Non-Hazardous Wastes Using Chemical Oxidation	07/15/94
C-4a.	Pretreatment of Non-Hazardous Wastes Using Chemical Reduction	07/15/94
C-5a.	Pretreatment of Non-Hazardous Wastes By Other Methods	. 07/15/94
C-6. Pretre	eatment Using Oil Recovery	07/15/94
C-7. Listed	l Waste Treatment Process	07/15/94
	ization/Fixation Prior f-Site Disposal	04/19/03
C-9. Waste	es for Storage and Transfer	04/19/03
C-10. Hazar	dous Waste Fuel Blending	04/19/03
_	dous Characteristics of Wastes k Systems	04/19/03
C-12. Pre-a	cceptance and Conformance Testing Parameters	07/15/94

List o	f Tables	Latest Revision Date
C-13.	List of Supplemental Analyses	07/15/94
C-14.	Analytical Methods	07/15/94
C-15.	Sampling Methods	07/15/94
C-16.	Hazardous Waste Shredding/Metal Washing	04/19/03
C-17.	Hazardous Waste Lamp Crushing	03/15/04
D-1.	Container Management Areas	03/15/04
D-2.	Tank Management Areas	04/19/03
D-3.	Physical Data for Existing Tanks	01/19/95
D-4.	Operating Data for Existing Tanks	04/19/03
D-5.	Physical Data for RCRA Resulted Tanks	04/19/03
D-6.	Operating Data for Proposed Tanks	04/19/03
D-7.	General Container Information	04/19/03
D-8.	List of Reagents Used in Waste Treatment Processes	04/19/03
D-9.	Container Handling Activities and Equipment	. 04/19/03
F-1.	Inspection Schedule	04/19/03
F-2.	General Facility Inspection Key Inspection Elements	04/19/03
F-3.	Unit Specific Inspection Key Inspection Elements	04/19/03
F-4.	Protective Equipment Guide	07/15/94

List o	<u>f Tables</u>	Latest Revision Date
G-1.	List of Emergency Coordinators	11/21/03
G-2.	List Of Coordination Agreements	01/19/95
G-3.	Emergency Equipment Capabilities	10/24/01
H-1.	Training Program Outline	01/31/04
H-2.	Training Topics	07/15/94
I-1.	Capacity of Existing/Proposed Hazardous Waste Storage/Treatment Units	03/15/04
I-2.	Closure Timeline	01/31/04
I-3	Frequency of Inspections and other Post-Closure Activities	04/19/03
I-4	Estimated Annual Soil Losses from Vegetated Final cap	04/19/03
<u>List o</u>	f Appendices	_atest Revision Date
<u>List o</u> B-1.	f Appendices Legal Description and Survey, Clean Harbors of Chicago, Inc., Drawing No. N-116032, prepared by National Survey Services, Inc.	
	Legal Description and Survey, Clean Harbors of Chicago, Inc., Drawing No. N-116032, prepared by	Latest Revision Date Undated
B-1.	Legal Description and Survey, Clean Harbors of Chicago, Inc., Drawing No. N-116032, prepared by National Survey Services, Inc. City of Chicago Zoning Ordinance, Page Nos. 227B, 228B,	Latest Revision Date Undated
B-1. B-2.	Legal Description and Survey, Clean Harbors of Chicago, Inc., Drawing No. N-116032, prepared by National Survey Services, Inc. City of Chicago Zoning Ordinance, Page Nos. 227B, 228B, 234B, and 235B.	Undated 01/01/72 01/24/91
B-1. B-2.	Legal Description and Survey, Clean Harbors of Chicago, Inc., Drawing No. N-116032, prepared by National Survey Services, Inc. City of Chicago Zoning Ordinance, Page Nos. 227B, 228B, 234B, and 235B. Seismic Survey	Undated 01/01/72 01/24/91
B-1. B-2. B-3. B-4.	Legal Description and Survey, Clean Harbors of Chicago, Inc., Drawing No. N-116032, prepared by National Survey Services, Inc. City of Chicago Zoning Ordinance, Page Nos. 227B, 228B, 234B, and 235B. Seismic Survey Roadway Analysis	Undated 01/01/72 01/24/91 01/24/91

C-1.	Typical Waste Analyses	Undated
C-2.	Treatability Study Data for Oxidation of Organic Compounds	Undated
C-3.	Treatability of Organic Compounds Using Carbon Adsorption	Undated
C-4.	Treatability Study Data for Stabilization/Fixation of Wastes	05/28/92
C-5	Generator Waste Material Profile Sheet	Undated
C-6	Container Storage Compatibility Test Procedure [Revised 09/17/83]	Undated
C-7	Laboratory Capabilities	Undated
C-8	Land Disposal Restriction Forms	02/29/00
D-1	Process Description For Existing and Proposed Activities at Clean Harbors Svcs Inc	03/15/04
D-2	Container Management Guidelines	03/15/04
D-3	Manufacturer's Literature For Mobile Waste Compactor	Undated
D-4	SOP treatment of Acid Cyanides	02/09/94
D-5	SOP Wetting of Organic Peroxides	02/09/94
D-6	Sample Labels/Markings	04/19/03
D-7	P.E. Assessment and Certification of the Design of Existing and Approved/Not Yet Constructed Containers Storage Areas	12/11/92
D-8	P.E. Certification of the Construction of the Proposed/Modified Container Storage Areas	01/19/95

D-9	Subsurface Investigation Reports	06/21/90
D-10	Technical Specifications for Coating Systems	Undated
D-11	Pegasus Fuel Blending System Operations Manual	07/06/94
D-12	P.E. Assessment and Certification of the Design of Proposed/Modified Tank Storage System	07/18/94
D-13	Construction Details for Existing Waste Receiving Tanks	09/02/80
D-14	Construction Details for Existing Bulk Storage Tanks	11/18/80
D-15	Design Details – Existing Chemical Treatment Unit	04/18/81
D-16	Design Details - Existing Clarifier Internal Assembly	03/26/81
D-17	Design Details - Existing Secondary Treatment Tanks	Undated
D-18	Design Details - Existing Sludge Sump	09/02/80
D-19	Design Details - Existing Sludge Conditioning Tank	02/03/88
D-20	Existing Reactor Vessel Details	04/16/01
D-21	Modifications in Effluent Holding Tanks	09/12/88
D-22	Design Details – Waste Storage Tank	Undated
D-23	Tank Details Oily Waste Water Pretreatment	11/19/82
D-24	P.E. Certification of Assessment of the Existing RCRA – Exempt Inorganic Treatment System	06/10/91
D-25	P.E. Engineer Assessment and Certification of the Design of the Approved/Not Yet Contracted	06/03/91
D-26	P.E. Certification of Assessment of the Integrity of the Proposed/Modified Tank Containment System	07/21/94

D-27	P.E. Assessment and Certification of the Design of Pegasus System	03/12/93
D-28	Structural Design and Secondary Containment Calculations for Approved/Not Yet Constructed Tank Units	03/12/93
D-29	Structural Design and Secondary Containment Calculations for Proposed/Modified Tank Systems	07/21/94
D-30	Waste Codes and Treatment Standards of Process Waste Surface Impoundments	Undated
D-31	Surface Impoundment Closure Certification	12/30/93
D-32	IEPA Closure Certification Approval	06/30/94
D-33	Survey Plat	05/03/94
D-34	Surface Impoundment Post-Closure Notice	05/10/94
D-35	Mfg's Literature: Enpac Corporation "Poly-Spillpallet 3000" Self-Contained Pallets	Undated
D-36	Engineering Drawings and Design Specifications for Bulk Storage Tank Farm (Unit 16)	01/-/95
D-37	Engineering Certifications for Dock Extension (Unit Q) and Fire Suppression System (Unit Q1)	07/21/99
D-38	Compressed Gas SOPs for Venting and Downloading, Engineering Certifications	10/22/01
D-39	Construction Certification - Unit G1	10/29/02
D-40	Unit 25 Lab Pack Pour-Off Emission Calculations, Engineering Certification	08/26/99
D-41	Building 42 Subpart BB/CC Emission Calculations, Engineering Certification, Potential Pathways to Humans or Environmental Receptors	01/22/99

D-42	Shredding System Engineering Calculations	09/20/00
D-43	Shredder/Hydropuplar Operations Manual	05/02/96
D-44	Shredding System Subpart BB/CC Emission Calculations, Potential Pathways to Humans of Environmental Receptors	01/17/00
D-45	Engineering Certification Units 16 and 25	03/20/01
D-46	Engineering Certification Units B and E	09/01/95
D-47	Engineering Certification Unit 26	09/09/95
D-48	Engineering Certifications Units 43 and 60	09/15/95
D-49	Engineering Certifications Units 13, 15, 59, 61, 62	07/03/95
D-50	Information Concerning Stacking of Non-Metallic Containers	04/24/03
D-51	Demonstration of Stacking Heights and Pile Arrangement Meeting NFPA 30 Requirements	10/17/03
D-52	Compressed Gas Cylinder Program and Guidelines	08/-/95
D-53	Engineering Assessment for Modified Building 25 and Truck Pad	03/20/01
D-54	Engineering Assessment for Unit F1, Unit Q, Unit V and Unit R2 (new portion)	11/25/02
D-55	Internal Tank Inspection Reports for Existing Tanks	12/19/02
D-56	Containment System Calculations for Unit Q and Unit X	Undated
D-57	Evaluation Data Sheets for Lab Pack Pour-Off Hood Ventilations	10/01/04
D-58	Unit F-1 Drawing	10/04/04

D-59	Tank Thickness Testing and Corrosion Rates	Thru 03
D-60	Lamp Crushing Machine	09/09/04
D-61	SOP for the Addition of Dry Ice to Roll-offs/Intermodals	Undated
D-62	SOP for the Wetting of Black Powder	11/07/01
E-1	Borings Logs and Groundwater Monitoring Well Construction Summaries	09/28/95
E-2	Groundwater Assessment Program, Fourth Quarter 1991 Report	1994
E-2A	Groundwater Elevation Data	04/29/94
E-3	Historical Data by Sampling Location	04/03/91
E-4	WMI Manual for Groundwater Sampling	1991
E-5	Laboratory Explanation of Pesticide and Herbicide Detection in April 1987 Event	Undated
E-6	Groundwater Assessment Report	1987
E-7	Groundwater Monitoring Enhancements Work Plan Report	Undated
F-1	Confined Space Entry Procedures	Undated
F-2	25 Year, 24 Hour Rainfall Chart	Undated
F-3	Fire Control Analysis	02/13/92
F-4	Professional Fire Protection Engineer Certification of Foam Fire Protection System Upgrade	02/19/96
F-5	P.E. Assessment and Certification of the Design of Railcar Containment Basin	05/18/95
F-6	Secondary Containment Calculations for Loading/Unloading Areas	03/10/93

F-7	Personal Protective Equipment Program	03/-/90
F-8	Equipment and Procedures for Transfer of Flammable Liquids	Undated
F-9	Ultrasonic Tank Testing Procedures and Qualifications	Undated
F-10	Remedial Work Order and Reinspection Report	Undated
G-1	Site Plan Existing Approved, Modified and Proposed Facilities & Operation	04/15/03
G-2/ G-3	Hazards Evaluation Report	10/04/04
G-4	Anticipated Hazards at Clean Harbors Svcs Inc	03/15/94
G-5	Emergency and Safety Equipment Location Plan	04/18/01
G-6	Documentation of Emergency Coordination Agreements	04/15/91 and 05/03/91
G-7	Evacuation Plan	01/19/00
G-8	Products of Incomplete Combustion	Undated
H-1	Job Descriptions/Job Titles	10/-/90
H-2	Professional Resumes	Undated
H-3	CHSI Training Documentation Form	Undated
H-4	CHSI Personnel Training Summary	04/19/03
I-1	Survey Plat	05/03/94
1-2	Post-Closure Notice	05/19/94
I-3	Closure Cost Estimate	03/15/94
I-4	Closure Financial Assurance Mechanism	12/13/02

I-5	Post-Closure Cost Estimate	10/17/03
I-6	Post-Closure Financial Assurance Mechanism	01/09/03
I-7	Hazardous Waste Facility Certificate of Liability Insurance	Effective 05/01/03
J-1	Existing CHSI Air Pollution Control Permits	05/30/01
J-2	Existing CHSI Water Pollution Control Permits	01/10/03
K-1	Facility Certification	11/11/04
K-2	Certification by Professional Engineer	10/07/04
L-1	CHSI Operating Permit	06/04/01
L-2	Solid Waste Management Units and Past Releases at CWMCSI	06/29/02
L-3	CHSI Release Reports	04/10/03
O-1	Clean Harbors, Inc. Sec. 10K Form	05/05/03
O-2	Prior Conduct Certification Forms	05/15/03
O-3	Description of Violations of Federal, State or Local Laws, Regulations, Ordinances	Undated
BB-1	List of Subpart BB Regulated Equipment	as 05/07/03
BB-2	Leak Detection Monitoring	12/06/96
BB-3	Calibration Information	Undated
BB-4	Outline of Minimum Facility Compliance Record	12/06/96
BB-5	Inspection and Leak Repair Data Form	Undated
BB-6	RCRA Air Emissions Regulations Overview	Undated

Page E-23 of E-23

CC-1	Closed Vent and Carbon Absorption Systems	Undated
CC-2	Subpart CC – Compliance Requirements for Affected Facilities .	12/06/96
CC-3	Subpart CC - Regulated Equipment and Processes	12/06/96
SFN:V	VRW:bjh\051161s.doc	

Note: The portions of the approved permit application that were undated were received by the Illinois EPA on or before December 19, 2004.

ATTACHMENT F

FINANCIAL ASSURANCE REQUIREMENTS

Clean Harbors Svcs Inc

LPC 0316000051

I. FINANCIAL ASSURANCE FOR CLOSURE

The permittee shall maintain financial assurance for the closure of the units at the facility as described in the application and as identified below in accordance with 35 Ill. Adm. Code 724.242 and 724.243.

A. Description of Units

<u>Unit</u>	aprion of Omio	Financial Assurance Required for Unit (1995 dollars)
i.	Existing Units to be Operated as of the Effective Date	e of this Permit
	Container Storage Units Drum Storage Area (Unit G1) Drum Storage Area (Unit R1) Lab Pack Pouroff Area (Unit F1) Drum Storage Area Expansion (Unit R2).	\$ 40,506 \$ 254,218 \$ 7,386 \$ 183,231
	Container Storage Building (Unit 25)	\$ 169,827 \$ 70,817 \$ 44,644
	Bulk Solids Storage Units Bulk Container Storage Area (Unit Q1) Bulk Solids Storage Pad (Unit B)	\$ 28,176 \$ 63,273
	Tank Storage/Processing Units Fuels Blending Operation (Unit 43) Tank Farm (Unit 16)	\$ 12,498 \$ 490,179
	Transportation Storage/Staging Units Truck Unloading Area and Bulking Area (Unit Q) Truck Loading Dock (Unit V)	\$ 74,616 \$ 73,716
,	Truck Staging Area (Unit C)	\$ 140,981 \$ 196,595 \$ 50,024 \$ 72,857 <u>\$ 95,967</u> \$2,069,511

<u>t</u>	Financial Assurance Required for Unit (1995 dollars)
Total for Existing/proposed Units Upon Effective Da Including 10% contingency.	ste \$2,276,462
Proposed Units to be Operated in the Future	
Proposed Container Storage Units	
Drum Storage Area Expansion (Unit R2)	\$ 34,160
Lab Pack Repack and Consolidation Area (Unit U)	\$ 20,294
Proposed Bulk Solids Storage Units	
Rolloff Container for Listed Waste (Unit Z1)	\$ 12,104
Proposed Tank Storage/Processing Units	
Listed Waste Storage Tanks (Unit Y)	\$ 548,819
Process Building 3 (Unit Z)	\$ 148,146
Tank Farm Unit 22	\$ 151,428
Shredding Operation	\$ 36,007
Metal Washing Operation	\$ 24,515
Proposed Transportation Storage/Staging Units	
Truck to Truck Transfer Pad (Unit W)	\$ 97,669
Listed Waste Loading/Offloading Area (Unit X).	\$ 49,491
Unit 69	\$ 50,073
Proposed Miscellaneous Treatment Unit and Storage A	<u>Area</u>
Building 42	 \$ 17,977
West Pad	(combined)
TOTAL FOR FUTURE UNITS	\$1,190,683
TOTAL Plus 10% contingency cost	\$3,259,810 \$3,585,791

B. Conditions

1. The Permittee shall provide financial assurance for the amounts identified above plus a 10% contingency cost. The required financial assurance shall be adjusted for inflation to the current year. The permittee shall provide financial assurance for all existing units. Financial assurance for proposed units shall be submitted to the Agency 60 days prior to placing wastes in the units identified in Condition I.A.ii above. No wastes shall be placed in the proposed units until the requirements of this condition have been met.

II. FINANCIAL ASSURANCE FOR POST-CLOSURE CARE

The permittee shall maintain financial assurance for the post-closure care of the surface impoundments at the facility as described in the application in accordance with 35 Ill. Adm. Code 724.244 and 724.245.

A. Surface Impoundments

Surface Impoundments	Financial Assurance Required for Unit (2009 dollars)
Annual cost of post-closure care	\$ 215,832
TOTAL cost of post-closure care	\$3,430,422

SFN:WRW:bjh\051161s.doc

ATTACHMENT G GROUNDWATER MONITORING DIAGRAMS, REPORTS, TABLES

LPC 0316000051

Clean Harbors Svcs Inc


Attachment G.1

Monitor Well Construction Diagram

LPC 0316000051

Clean Harbors Svcs Inc

Monitoring Well Diagram

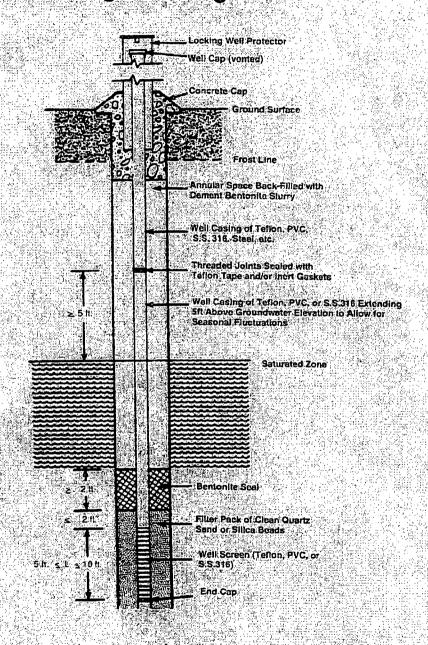

Attachment G.2

Field Boring Log

Clean Harbors Svcs Inc

LPC 0316000051

Illinois Environmental-Protection Agency

Field Boring Log

Pau	 	 33	

Site Nam Quadran UTM (or Plane) C Latitude:	gle Sec. State out I. (2)	E (Y)	Boring No. Monitor			letion Depth:					
			ar King Tara ete		SAMPLES				LES	Personnel	
Drilling	Squipment Description of Mate		Oraphe	Depth La-Feet	Sample No.	Sample Type	Sample Recovery (X)	Penetrometer	N Values (Blow Counts)	OVA or HNU Readings	G- D- H- H- REMARKS
7											

Attachment G.3

Well Completion Report

Clean Harbors Svcs Inc

LPC 0316000051

Site Number:		County:			letion Report
	그렇게 하지 않아 보다는 그렇게 되었다.	이 경험 실었다.			Well#:
Site Name: State Plane Coordinate: X Y	o '	Long	o itude:		Borebole #.
Surveyed by:	80 (1.5), 1		IL Registration	1#:	4. (1) 1) 4 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1 (1) 1
Drilling Contractor:	Mada Alianda Alianda Alianda Mada Alianda Alianda		Driller:		
Consulting Firm.			Geologist:		
Drilling Method:			المستعمل وبريا بالبراء والخاط أأثاث أنبه	The state of the state of	
Logged By:		Talendaria Talendaria Talendaria		Sand Maria and Art 100	Date Finished
Report Form		t, Middige Sanggara	Date:		
Completed By:					
ANNULAR SPACE D	ETAILS		Elevations	Depths	(.01ft.)
			(MSL)*	(BGS)	
					Top of Protective Casu
				<u> </u>	Top of Riscr Pipe
Type of Surface Seal:					Ground Surface
Type of Annular Scalant.					Top of Annular Sealan
Installation Method:	\$P\$\$P\$\$P\$1.650 \$P\$1.1 (2015) 1. (1) (1) (1) (2) (1) (1) (1) (1) (1) (1) (1) (1) (1) (1				Static Water Level
Setting Time:		¥ †			(After Completion)
Type of Bentonite Seal Granu	(Choose One)	N.			Top of Scal
Installation Method:		X			Top of Sand Pack
Setting Time:					Top of Screen
Type of Sand Pack:					Bottom of Screen
Grain Size: (Sieve S	Size)		(3 .)		Bottom of Well
Installation Method:					Bottom of Borehole
Type of Backfill Material:			• Referenced	to a National Ge	odetic Datum
(if appl Installation Method:	icable) &	CAS	ING MEASURM	IENTS	
ELL CONSTRUCTION MATE		ID of I	ter of Burchole (muh Riser Pipe (inches)	Maliyata Chisti	
	material for each area)		tive Casing Length (I		F-6511 7 11 F 10 11 11 11 11 11 11 11 11 11 11 11 11

Well Completion Form (revised 02/06/02)

Attachment G.4

IEPA Monitor Well Plugging Procedures

Clean Harbors Svcs Inc

LPC 0316000051

ILLINOIS EPA MONITOR WELL PLUGGING AND ABANDONMENT PROCEDURES

	F	Well Construction	Plugging Procedure
i. Unconsolidated Sediment Wells	I-A	if backfilled with cement grout above bentonite seal and/or sandpack;	 Cut casing off at desired depth. Mix neat cement slurry (5 gal. water per 94 lb. bag cement). Insert tremi pipe (1" i.d. pvc) into well and extend to bottom. Slowly pump slurry under low pressure through terni pipe. Slowly withdraw tremi pipe - making sure bottom of pipe remains below pure slurry. Continue slow pumping until all formation water and the watery slurry mix is displaced from top of casing.
	If backfilled with soft sediments (cuttings) above bentonite seal and/or sandpack:		 Knock out and remove thin surface concrete plug, if present. Re-auger entire length of well. Remove well casing from re-augured borehole. Mix neat cement slurry (6 get. water per 94 lb. bag cement). Insert tremi pipe (1* i.d. pvc) into augers and extend to bottom. Slowly pump slurry under low pressure through tremi pipe. Continue slow pumping until all formation water and the water slurry mix is displaced from top of casing. Slowly withdraw tremi pipe - making sure bottom of pipe remains below pure slurry. Pull a flight of augers (5" if in unstable materials and hole collapse is likely or 10" if in competent material and collapse is unlikely). Top off cement slurry after each flight is removed.
	1-C	if monitor well construction is unknown:	
il. Bedrock Wells	II-A	All bedrock monitor wells:	 Cut casing off at desired depth. Mix neat cement slurry (5 gal. water per 94 lb. bag cement). Insert tremi-pipe (1" i.d. pvc) into well and extend to bottom. Slowly pump slurry under low pressure through tremi pipe. Slowly withdraw pipe making sure bottom of pipe remains below pure slurry. Continue slow pumping until all formation water and the watery slurry mix is displaced from top of casing.

Well Plugging Procedures (revised 02/06/02)

Attachment G.5

Electronic Groundwater Submittal Forms

Clean Harbors Svcs Inc

LPC 0316000051

Formatting Requirements for the 01 Record of the Electronically Submitted Groundwater and Leachate Data (the 01 Record portion of the LPC-160 is included for example purposes)

IL 532 1213 ILLINOIS ENVIRONMENTAL PROTECTION AGENCY DIVISION OF LAND POLLUTION CONTROL Page 1 of CHEMICAL ANALYSIS FORM RECORD TRANS CODE FEDERAL ID NUMBER MONITOR POINT NUMBER SITE INVENTORY NUMBER (see Instructions) DATE COLLECTED ______ REGION _____ CO. _ FACILITY NAME TIME COLLECTED _ FOR IEPA USE ONLY BACKGROUND SAMPLE (X) (24 Hr. Clock) UNABLE TO COLLECT SAMPLE (see Instructions) DATE RECEIVED MONITOR POINT SAMPLED BY OTHER (SPECIFY) (see Instructions) SAMPLE FIELD FILTERED — INORGANICS (X) _ SAMPLE APPEARANCE COLLECTOR COMMENTS LAB COMMENTS LPC 160 01/90 This Agency is authorized to require this information under Illinois Revised Statutes, 1979, Chapter 111 1/2, Section 1004 and 1021. Disclosure of this information is required. Failure to do so may result in a civil penalty up to \$25,000 for each day the failure continues a fine up to \$1,000.00 and imprisonment up to one year. This form has been approved by the Forms Management Center. All analytical procedures must be performed in accordance with the methods contained in "Test Methods for Evaluating Solid Wastes, Physical/Chemical Methods," SW-846, 3rd Edition, September 1986 or equivalent methods approved by the Agency. Proper sample chain of custody control and quality assurance/quality control procedures must be maintained in accordance with the facility sampling and analysis plan. *Only Keypunch with Data in Column 35 or Columns 38-47

KEY:

Spaces Numbered	Description	<u>Format</u>	
Spaces 1-7	Record Code	LPCSM01	
Space 8	Trans Code	Α	
Spaces 9-18	Site ID	0000000000	
Spaces 19-22	Mon Pt ID	G000	
Spaces 23-28	Date Collected	000000	
Space 29	Lab		
Spaces 30-35	Filler		
Spaces 36-41	Report Due Date	000000	
Spaces 42-47	Date Received	000000	
Spaces 48-53	Filler 2		
Space 54	Background Sample		
Spaces 55-58	Time Collected	0000	
Space 59	Unable to Collect Sample		
Space 60	Monitoring Point Sampled By		
Space 61	Field Filtered - Inorganic	•	
Space 62	Field Filtered – Organic		
Spaces 63-102	Sample Appearance		
Spaces 103-142	Collector Comments		
Spaces 143-149	Filler 3		
Spaces 150-199	Lab Comments		

Attachment K-2Formatting Requirements for the 02 Record of the Electronically Submitted Groundwater and Leachate Data (the 02 Record portion of the LPC-160 is included for example purposes)

	RECORD CODE L P C S M 0 2 TRANS CODE A (COLUMNS 9-29 FROM ABOVE)				(COLUMNS 9-29 FROM ABOVE)		
	<u>FIELD MEASUREMENTS</u> CONSTITUENT DESCRIPTION AND REQUIRED UNIT OF MEASURE	STORET NUMBER	Remarks See Inst.	Replicate	v or >		VALUE
Q	TEMP OF WATER (unfiltered °F)	0 0 0 1 1	35	36	37	38	
Q	SPEC COND (unfiltered umhos)	00094		_	_		
Q	pH (unfilted units)	00400					
Q	ELEV OF GW SURF (ft ref MSL)	7 1 9 9 3	_		_		
Q	DEPTH OF WATER (ft below LS)	<u>72019</u>	_		_		
A	BTM WELL ELEV (ft ref MSL)	72020	_		<u></u>		
Q	DEPTH TO WATER FR MEA PT (ft)	72109	_		_		
		<u></u>			_		
			_		_		

IL 532 1213 LPC 160 01/90

This Agency is authorized to require this information under Illinois Revised Statutes, 1979, Chapter 111 ½, Section 1004 and 1021. Disclosure of this information is required. Failure to do so may result in a civil penalty up to \$25,000 for each day the failure continues a fine up to \$1,000.00 and imprisonment up to one year. This form has been approved by the Forms Management Center.

All analytical procedures must be performed in accordance with the methods contained in "Test Methods for Evaluating Solid Wastes, Physical/Chemical Methods," SW-846, 3rd Edition, September 1986 or equivalent methods approved by the Agency. Proper sample chain of custody control and quality assurance/quality control procedures must be maintained in accordance with the facility sampling and analysis plan.

Format LPCSM02

000000000

Α

*Only Keypunch with Data in Column 35 or Columns 38-47

KEY:

Spaces Numbered	Description
Spaces 1-7	Record Code
Space 8	Trans Code
Spaces 9-18	Site ID
Spaces 19-22	Mon Pt ID
Spaces 23-28	Date Collected
Space 29	Lab
Spaces 30-34	STORET Number
Space 35	Remarks
Space 36	Replicate
Space 37	< or >
Space 38-47	Value

Attachment G.6

RCRA Facility Groundwater Leachate and Gas Reporting Form (LPC 592)

Clean Harbors Svcs Inc

LPC 0316000051



 Bureau of Land 1021 North Grand Avenue East Box 19276 Springfield, IL 62794 9276

RCRA FACILITY GROUNDWATER, L'EACHATE AND GAS REPORTING FORM

This form must be used as a cover sheet for the notices and reports, identified below as required by (1) a facility's RCRA interim status closure plan, (2) the RCRA interim status regulations, or (3) a facility's RCRA permit. All reports must be submitted to the Illinois EPA's Bureau of Land Permit Section. This form is for use by Hazardous Waste facilities only. Reporting for Solid Waste facilities should be submitted on a separate form. All reports submitted to the Illinois EPA's Bureau of Land Permit Section must contain an original, plus a minimum of two copies.

Note.	This form is not to be used with a approved permit or closure plan as a report or a modification regi	will state whether the	modification requests. The facility's document you are submitting is require
Facili	y Name:		Site ID#:
	Extensional time of the control of t		Fed ID.#:
Chec Chec form.	k the appropriate heading. Only or k the appropriate sub-heading, who	ie heading may be ch ere applicable. Attach	necked for each corresponding submitt n the original and all copies behind this
	LPC-160 Forms		Leachate
	Groundwater Quarterly_Indicate one:	1 2 4 4	Quarterly – Indicate one: 1 2 3 4
	Semi-Annual		Semi-Annual
	Annual		Annual
	Biennial		Biennial ,
	Groundwater Data (without LPC-1 Quarterly = Indicate one:-1 Annual		<u></u> . Вієяліаі
	Well Construction InformationWell Construction Forms: BeWell Survey Data (e.g., Stic	oring Logs and/or Aba k-up Elevation Data)	andonment Forms
	Notice of Statistically Significant E (35 III. Adm. Code 724:198)	vidence of Groundwa	iter Contamination
	Notice of Exceedence of Grounds	vater Concentration L	imit (35 III. Adm. Code 724 199(h))
	Notice of Alternate Source or Erro (35 III. Adm. Code 724 199(I))	ır in Sampling Analysi	is or Evaluation of Groundwater
	Gas Monitoring Reports		
	Other (identify)		
- TO 19-0			表的 1000 1000 1000 1000 1000 1000 1000 10

IL 532-2675

jab\041021i.doc

ATTACHMENT H

STATUS OF CORRECTIVE ACTION AT FACILITY

Clean Harbors Svcs Inc

LPC 0316000051

ATTACHMENT H.1

INTERIM STATUS CLOSURE EFFORTS

AT THE FORMER CWM PORTION OF THE FACILITY

Clean Harbors Svcs Inc

LPC 0316000051

ATTACHMENT H.1

Interim Status Closure Effort at the Former CWM Portion of the Facility

Several units on the former CWM portion of this facility have been or are being closed in accordance with plans approved by Illinois EPA Log Nos. C-307, C-742, C-759 and C-771. A description of the closure activities and units undergoing closure for these four Log Numbers follows:

- 1. The IEPA approved a closure plan for four interim status hazardous waste surface impoundments under Log No. C-307. Eventually, these units were closed as landfills and Illinois EPA accepted certification of closure of these units on June 30, 1994. As a result of closing the impoundments as landfills, Clean Harbors is required to carry out post-closure care of these units in accordance with their RCRA permit.
- 2. A plan to complete closure of 16 former hazardous waste management units was initially approved by Illinois EPA on October 31, 1994 (Log No. C-742). A list of these units is provided in Table 1.
 - a. A substantial amount of information relative to this closure effort was approved by IEPA on September 28, 1995.
 - b. On August 20, 1996, IEPA determined that closure of all of these subject units with the exception of Unit 49 Outdoor Container Storage Areas was complete. However, this letter also indicates that the subject units as well as the Fire Suppression System may be subject to additional investigation and possible corrective measures under the corrective action provisions of the facility's RCRA permit. The Unit 49 Outdoor Container Storage Areas was subsequently closed under Log No. C-771, as described in Item 4, below.
 - c. A review of Illinois EPA files found that these units are within the area to receive an engineered barrier as part of closure of the former incinerator and associated equipment (see Item 3 below). Establishment of this engineered barrier and associated institutional control will bring closure and corrective action responsibility for these units to completion.
- 3. On January 25, 1996 IEPA approved a closure plan for several hazardous waste management units present in the former incinerator process area at the former CWM incinerator facility (Log No. C-759).

- a. A list of the units addressed in this plan is provided in Table 2.
- b. A closure plan modification request for this project was approved by IEPA letter dated January 16, 2003. This modification proposed that additional soil samples be collected and analyzed to better define the extent of soil contamination in the area; it also indicates that Clean Harbors desires to use existing structures and pavement as engineered barriers as part of the overall closure effort.
- c. The IEPA by letter dated December 21, 2004 approved a report submitted on the additional sampling required by its January 16, 2003 letter and made a No Further Action determination with respect to the former incinerator process area of the facility, subject to establishment of an engineered barrier ELUC.
- 4. On October 30, 1996, approved a combination closure plan and closure certification statement for two container storage areas (one west of the Bulk Storage Tank Farm and the other northwest of the Bulk Storage Tank Farm; the Bulk Storage Tank Farm is also referred to as Unit 49) (Log No. C-771).
 - a. Condition 1 of the October 30, 1996 approval letter indicates that these units may be subject to additional investigation and corrective measures under the corrective action portion of the facility's RCRA permit.
 - b. A review of Illinois EPA files found that these units are within the area to receive an engineered barrier as part of closure of the former incinerator and associated equipment (see Item 3 above). Establishment of this engineered barrier and associated institutional control will bring closure and corrective action responsibility for these units to completion.

Tables: Table 1 -- Units Closed Under C-742
Table 2 -- Units Closed Under C-759

ATTACHMENT H.1

Table 1

<u>Unit No.</u>	Description
1	Bulk Storage Tank T108
2	Bulk Storage Tank T-111
3	The Bulk Storage Tank Farm Piping, Pumps and Ancillary Equipment
4	The Building 43 Primary Drum Shredder
5	The Building 43 Drum Crusher Unit
6	The Building 26 Secondary Shredder
7	Ancillary Equipment Associated with Units 1 through 6
8	The Building 26 Roller Conveyor Unit
9	Bulk Storage Tanks T-101 through T-107, T-109, T110 and T-112
10	The Tank Farm Secondary Containment Structure
11	Building 25
12	Building 26
13	Building 43
14	Area 38 - the Old CWM-CS Ash Pad
15	The Conveyor Between Buildings 26 and 43
16	Unit 49 Outdoor Container Storage Areas

ATTACHMENT H.1 Table 2

The following units are addressed in the closure plan assigned Log No. C-759 by Illinois EPA:

- a. Hazardous Waste Incineration System (T03 unit):
 - (1) Rotary Kiln (Unit 19) and Ancillary Equipment;
 - (2) Secondary Combustion Chamber (Unit 20);
 - (3) Overhead Pipe Rack (Unit 18) running from:
 - (a) the Secondary Combustion Chamber to the Tank Farm and
 - (b) the Secondary Combustion Chamber to the Control Room;
 - (4) Air Pollution Control System (Unit 21);
 - (5) Stack Monitoring Building (Unit 34); and
 - (6) Concrete/Asphalt Foundation and Structures Underlying the Incineration System Units Undergoing Closure,
- b. Hazardous Waste Container Storage/Staging Areas (S01 units):
 - (1) Kiln Staging Areas (Unit 45):
 - (a) South of the Rotary Kiln and
 - (b) South of the Secondary Combustion Chamber;
 - (2) Truck Staging Area (Unit 48);
 - (3) Outdoor Container Storage Areas (Unit 49):
 - (a) North of the Air Pollution Control System and
 - (b) East of Building 43; and
 - (4) Ash Hopper Staging Area (Unit 54);
- c. Underground Stormwater Collection System; and
- d. Process Wastewater Treatment System:
 - (1) Neutralizing Area (Unit 22);
 - (2) Effluent Treatment Building (Unit 23);
 - (3) Lamella Settlers (Unit 24); and
 - (4) Filter Building (Unit 42).

ATTACHMENT H.2

1994-95 CONSTRUCTION EFFORTS AT THE FORMER

CWM PORTION OF THE FACILITY

Clean Harbors Svcs Inc

LPC 0316000051

ATTACHMENT H.2

1994-95 Construction Efforts at the Former CWM Portion of the Facility

Once Clean Harbors decided to incorporate the former CWM-CS Incinerator facility into its facility in Chicago, the company also decided that it needed to construct several new units on the former CWM-CS property. A summary of the activities associated with this construction effort which occurred in 1994 and 1995 follows:

- 1. On August 16, 1994, the Illinois EPA approved a plan to conduct a pre-construction investigation of soil contamination present at the following proposed units:
 - a. Area 13—Rail Car Unloading Area
 - b. Area 14—Truck Scale
 - c. Area 59—Truck Staging Area
 - d. Area 60-Roll-off Pad for Fuels Blending
 - e. Area 61-Container Handling Area
 - f. Area 62—Truck Pad

The letter indicated this work was being carried out in accordance with an agreement between Clean Harbors and IEPA to investigate for potential soil contamination prior to conducting any construction efforts in these areas. The results of this investigation would allow the construction efforts to be coordinated with RCRA corrective action efforts in these areas.

- 2. On November 22, 1994, the Illinois EPA granted a temporary authorization to Clean Harbors to construct the following 11 units:
 - a. Rail Car Unloading Area (Area 13);
 - b. Ignitable Liquid Tank Farm (Area 16);
 - c. Container Storage Building (Area 25);
 - d. Ignitable Container Storage Building (Area 26);

- e. Fuel Blending Area (Area 43);
- f. Truck Staging Area (Area 59);
- g. Roll-off Pad for Fuel Blending (Area 60);
- h. Container Handling Dock (Area 61);
- i. Truck Pad at the Container Handling Dock (Area 62);
- j. Fire Suppression System;
- k. Truck Staging Area (on old Clean harbors portion of the facility)

A non-regulated construction effort (Truck Scale Relocation—Area 14) was also approved in this action).

- 3. A July 7, 1995 IEPA letter responded to a report documenting the results of a preconstruction investigation conducted at the areas of the former CWM Incinerator Process Area identified in Item 1 above. The results showed that neither gross contamination nor buried drums and structures were present in any of the areas investigated. Contaminant levels were high enough that they needed to be further addressed as part of the RFI for the CWM-CS portion of the facility.
- 4. On September 20, 1995, IEPA approved a construction certification report for all the units identified in Item 1, except Area 60 (the construction certification report for Area 60 was subsequently approved on November 7, 1995). In addition, this report contained certification of construction for Unit 15—Tank Truck Loading/off-Loading Platform.
- 5. On October 5, 1995, IEPA approved a construction report of the Bulk Storage Pad (Unit B) and the Truck Staging Area (Unit C).
- 6. On November 7, 1995, IEPA approved the construction certification report for the Fuel Blending Operation (Unit 43) and the Roll-Off Pad for Fuel Blending (Unit 60). This in conjunction with the September 20, 1995 IEPA letter approving the construction completion report for the 5 units for which a pre-construction soils investigation was completed.

- 7. In a separate November 7, 1995 letter, IEPA approved the construction certification report for (2) Flammable Storage Tank Farm (Unit 16) and (2) Container Management Building (Unit 25).
- 8. In yet another separate November 7, 1995 letter, IEPA approved the construction certification report for the Ignitable Container Management Building (Unit 26), subject to the requirement that the permittee shall not place containers of waste on the ramps inside this unit.
- 9. As required by Illinois EPA's July 7, 1995 letter identified in Item 3 above, additional sampling for the units identified in Item 1 above was proposed by Clean Harbors in its Phase I Supplemental RCRA Facility Investigation Work Plan, submitted on December 4, 1995 and approved by IEPA letter dated March 20, 2002 (Log No. B-16-CA-1). The Illinois EPA deemed that Clean Harbors properly implemented this work plan by a letter dated April 9, 2003 (Log Nos. B-16-CA-1 and 3). This letter required the facility to incorporate this data into a comprehensive facility-wide TACO analysis and Phase I Soils CMP. The facility subsequently submitted the Phase I Soils CMP to the Agency on May 7, 2004 and is currently under review. This submittal contains a Tier 1 TACO analysis.

ATTACHMENT H.3 CORRECTIVE ACTION EFFORTS AT THE

ORIGINAL CLEAN HARBORS FACILITY

Clean Harbors Svcs Inc

LPC 0316000051

ATTACHMENT H.3

Corrective Action Efforts at the Original Clean Harbors Facility

- 1. A RCRA permit was issued to Clean Harbors on September 30, 1993 which required the company to carry out corrective action, as necessary, on the SWMUs of concern on the original portion of the facility (this area is approximately 26 acres in size with both portions of the Clean Harbors facility comprising a total of 56.6 acres).
- 2. An RFI Phase I workplan to investigate potential soil contamination at 18 SWMUs was approved by IEPA on November 28, 1994. The SWMUs of concern are:
 - SWMU 1 Process Sewer System
 - SWMU 2 Outside Drum Storage Area No. 1
 - SWMU 3 Outside Drum Storage Area No. 2
 - SWMU 4 Carbon Absorption System Building
 - SWMU 5 the northern portion of Process Building No. 1
 - SWMU 6 Process Building No. 1
 - SWMU 7 Chlorobenzene Contaminated Area
 - SWMU 8 Auxiliary Basin No. 3
 - SWMU 9 Landfill
 - SWMU 10 Former Temporary Pickle Liquor Basin
 - SWMU 11 Former Permanent Pickle Liquor Disposal Sites
 - SWMU 12 Former Pickle Liquor Basins
 - SWMU 13 Former Oil Basin
 - SWMU 14 Former Liner Basin
 - SWMU 15 Oil Contaminated Storage Area
 - SWMU 16 Tanks 1-4
 - SWMU 17 7,000-Gallon Concrete Receiving Tanks
 - SWMU 18 Truck Unloading Pad

The Illinois EPA and Clean Harbors agreed to group nine of these SWMUs into two Areas of Concern, as detailed below:

- AOC 1 Northern Portion of Process Building No. 1 Comprised of SWMU Nos. 2, 4, and 5.
- AOC 2 Southern Portion of Process Building No. 1 Comprised of SWMU Nos. 1, 3, 6, 14, 17, and 18.

- 3. On January 31, 1996, IEPA approved the RFI Phase I report for the original portion of the facility (Log No. B-16-CA-1). Soil contamination was encountered at several SWMUs and a Phase II RFI workplan was required to be submitted to investigate for soil and, as necessary, groundwater contamination.
- 4. On March 6, 1997, IEPA approved a combined Phase II/III work plan for the original portion of the facility (Log No. B-16-CA-2). The approval letter states that the goals of these activities will be to determine: (1) the nature and potential extent of soil contamination identified during Phase I of the RFI; and (2) the nature of releases, if any, to both on-site and off-site groundwater.
- 5. On April 9, 2003, IEPA approved the soil-related aspects of the RFI Phase II/III report for the original portion of the facility (Log Nos. B-16-CA-1 and B-16-CA-3). This letter specified a limited amount of additional investigation necessary to bring soils characterization to completion for the corrective action program for the entire facility (both the original Clean Harbors portion and former CWM portion). Further, Clean Harbors is required to submit to the Illinois EPA a facility-wide TACO analysis, including both past and present soils data in a Phase I CMP Soils Report.
- 6. On May 7, 2004, Clean Harbors submitted the comprehensive facility-wide TACO analysis in a Phase I Soils CMP, required by Item 5 above, which is currently under review by the Agency.

ATTACHMENT H.4 CORRECTIVE ACTION EFFORTS AT THE FORMER CWM PORTION OF THE FACILITY

Clean Harbors Svcs Inc

LPC 0316000051

ATTACHMENT H.4

Corrective Action Efforts at the Former CWM Portion of the Facility

The northern portion of the Clean Harbors facility was once a separately operated facility used for the incineration of hazardous waste under a state permit and interim status. Some waste treatment also previously took place in this portion of the facility. The last entity to own and operate this area prior to Clean Harbors was Chemical Waste Management Chemical Services (CWM-CS). An overview of corrective action efforts completed to date at this facility is as follows:

- 1. USEPA and CWM entered into a 3008(h) order in 1987 requiring CWM to investigate/remediate the below10 SWMUs:
 - SWMU 1 Biochemical Filter Beds
 - SWMU 2 Activated Sludge Basins
 - SWMU 3 Drum Handling Area
 - SWMU 4 High Solids Area
 - SWMU 5 Wastewater Basin #1/Vault
 - SWMU 6 Wastewater Basin #2
 - SWMU 7 Chemical Treatment Area
 - SWMU 8 Biochemical Treatment Area
 - <u>SWMU 9</u> Process Water Underground Pipe System
 - SWMU 10 Hyon Tank Farm

Please note that SWMUs 7, 8, part of 9 and 10 are located within the process area, where in the past a hazardous waste incinerator operated. This incinerator has since been shut down, decontaminated, dismantled and transported off-site as part of an interim status closure project. A substantial amount of investigation was conducted at the SWMUs of concern under this order.

2. On June 30, 1995, IEPA issued a modified permit for the Clean Harbors facility allowing the CWM-CS facility to be incorporated into the Clean Harbors facility. Among other things, this permit required that Clean Harbors submit: (1) a Corrective Measures Plan for the SWMUs on the CWM-CS property (this plan was to contain a summary of investigative efforts to date; a GMZ application to address, among other things, lead and benzene contamination detected at some of the monitoring wells; proposed soil and groundwater cleanup objectives; and a general discussion of expected corrective measures to be taken); and (2) a plan to investigate for potential contamination in the Process Area

and in the vicinity of Monitoring Well G121S associated with the 4 surface impoundments which were closed as landfills (these impoundments are receiving post-closure care in accordance with the modified permit).

- 3. A limited soil investigation plan for the Process Area was approved by IEPA on March 20, 2002 (Log No. B-16-CA-1). The incineration process area has effectively undergone RCRA closure, subject to the ELUC requirement which includes an engineered barrier per the Illinois EPA letter dated December 21, 2004 (Log No. C-759-M-2).
- 4. Illinois EPA approved by letter dated April 9, 2003 (Log Nos. B-16-CA-1 and B-16-CA-3) the soil related aspects of the Initial Corrective Measures Program Final Report for the CWM-CS portion of the facility, which was submitted to the Agency on December 4, 1995. In addition, the RFI Phase II/III report for the original Clean Harbors portion of the facility was also approved at this time.

The April 9, 2003 Illinois EPA approval letter specified a limited amount of additional investigation to bring soils characterization to completion at the entire facility (both the original Clean Harbors portion and former CWM portion). Further, Clean Harbors is required to submit to the Illinois EPA, by January 9, 2004 a facility-wide TACO analysis, including both past and present soils data in a Phase I CMP Soils Report.

- 5. Illinois EPA approved by letter dated November 3, 2003 (Log No. B-16-CA-4) a Supplemental Phase I document reporting the results of the limited soils investigation required by the IEPA Letter dated March 20, 2002.
- 6. On May 7, 2004, Clean Harbors submitted the comprehensive facility-wide TACO analysis in a Phase I Soils CMP (Log No. B-16-CA-5), which is currently under review by the Agency. Clean Harbors made their submittal in accordance with the Illinois EPA letter dated April 9, 2003.

In summary, SWMUs 7, 8, part of 9 and 10 are within the process area, shown on attached schematic which has effectively been remediated, subject to the establishment of an engineered barrier and associated institutional control required as part of the interim status closure of the former incinerator and associated units (these requirements are set forth in Illinois EPA's December 21, 2004 letter (Log No. C-759-M-2). The remainder of this portion of the facility is undergoing corrective action and the Illinois EPA is currently reviewing its May 7, 2004 Phase I Soils CMP submittal.

SFN:WRW:bjh\051161s.doc

ATTACHMENT I

RCRA CORRECTIVE MEASURES PROGRAM REQUIREMENTS CLEAN HARBORS SVCS INC

Clean Harbors Svcs Inc

LPC 0316000051

ATTACHMENT I

RCRA Corrective Measures Program Requirements Clean Harbors Svcs Inc B-16R

1.0 BRIEF OVERVIEW OF A RCRA CORRECTIVE MEASURES PROGRAM

Typically, at the end of an RFI, the concentration of contaminants present in the soil/sediments/groundwater/surface waters at a SWMU or other area of concern is compared to remediation objectives developed in accordance with 35 Ill. Adm. Code 742. If the contaminant levels are above these objectives, then some type of corrective measure must be completed to achieve these objectives. In addition, certain corrective measures may need to be carried out to support the established remediation objectives (i.e., the establishment of engineered barriers and/or institutional controls). However, at a unit where waste or high levels of contamination remains, a decision may be made to close the unit as a landfill and then provide post-closure rather than removing the material and/or achieving remediation objectives developed in accordance with 35 Ill. Adm. Code 742.

To allow for a logical and orderly progression in developing and implementing necessary corrective measures, the Corrective Measures Program (CMP) being carried out in accordance with this RCRA permit should be carried out in five phases which build on each other. It is not necessary for a corrective measures program at a given SWMU or other areas of concern to follow these five phases step-by-step; rather, phases can be combined and/or skipped, depending on the actual remedial measure selected. The overall CMP implemented must set forth a logical path for its implementation and allow for Illinois EPA oversight and approval throughout the entire process.

A brief discussion of the five phases of a CMP is as follows:

- 1. Phase I is the conceptual design of the selected corrective measure(s).
- 2. Phase II is the development of final design plans for the corrective measure, including installation and operation/maintenance plans.
- 3. Phase III is the actual construction/installation of the selected corrective measure.
- 4. Phase IV is the operation, maintenance, and monitoring of the selected corrective measure to ensure it is properly protecting human health and the environment.

5. Phase V is the final demonstration/verification that the implemented corrective measure achieved the approved remedial objectives.

Sections 2.0 through 6.0 which follow provide a more detailed discussion of each of these five phases. Section 7.0 has been developed to describe the corrective measures program which may be used in lieu of the afore-mentioned five phase procedure when soil removal is the selected remedy. It must be noted that work plans, reports, etc. must be developed to document how the Permittee carries out the required corrective measures program at each SWMU or other areas of concern. All such documents must be reviewed and approved by Illinois EPA prior to their implementation.

2.0 PHASE I OF THE CMP

Phase I of the CMP includes selection of the corrective measure to be taken and developing a basis for completing the final design of the measure. This effort should be documented in a Conceptual Design Report which describes the proposed corrective measure for each SWMU and other areas of concern and provides a conceptual design for these measures. The main criteria for Illinois EPA review is whether the proposed corrective measures are able to achieve the final cleanup objectives previously established by the Permittee and the Illinois EPA and/or provide the necessary institutional controls to prevent the migration of contaminants from the SWMU of concern. Based upon a review of the Conceptual Design Report, the Illinois EPA may approve the corrective measures, require revisions to the proposed corrective measures, or require that a totally new corrective measures proposal be submitted to the Illinois EPA.

The Conceptual Design Report should contain the following sections:

- 1. <u>Introduction/Purpose</u>. This section should contain: (1) general background information regarding the project; (2) the purpose and goals of the submittal; and (3) the scope of the project.
- 2. <u>Existing Site Conditions</u>. This section should contain a summary of the investigative activities conducted for each of the units of concern. Investigation analytical results should be provided in tabular form, and maps depicting both the horizontal and vertical extent of contamination at the site should be provided.
- 3. Evaluation for Potential Future Migration. Based on the existing site conditions, a conceptual model of the site should be developed and presented in this section. The potential for additional future migration of contamination for each of the units of concern must then be evaluated, especially those units which have been determined to

have released hazardous waste/hazardous constituents to the groundwater. It may be helpful to develop conceptual models for contaminant migration. Of special concern in this evaluation are (1) the physical properties of the contaminants (solubility, volatility, mobility, etc.); and (2) existing site conditions (types of soil present, location of contamination, hydrology, geology, etc.).

- 4. <u>Corrective Measures Objectives</u>. This section should discuss the general objectives of the proposed corrective measure to be constructed/installed, and the ability of the proposed corrective measure to achieve the established remediation objectives (unless the selected corrective measure is closure as a landfill which will require proper establishment of a final cover and proper post-closure care of the closed unit.
- 5. <u>Identification of Options Available</u>. This section should contain a brief discussion of the various options available to achieve the corrective measures objectives for each unit. This discussion should identify: (1) a general overview of each option available, including how the option will achieve the stated objective; (2) the advantages associated with each option; (3) the disadvantages associated with each option and (4) an estimate of the cost associated with choosing each remedial option.
- 6. <u>Description of Selected Corrective Measure</u>. This section should contain a qualitative discussion of the corrective measure chosen, along with the rationale which was used to select this measure from all those identified initially. This discussion should include documentation that the selected corrective measure will be effective.
- 7. <u>Identification of Design Criteria</u>. This section should identify what information must be available to design the selected corrective measure.
- 8. Review of Available Information. This section should contain an evaluation of the existing information to ensure that it is sufficient to complete the design of the selected corrective measure. If insufficient information is available, then the report should contain procedures for collecting the required additional information.
- 9. <u>Procedures for Completing the Design</u>. This section should contain a description of the procedures which will be followed to complete the design of the corrective measure. This should include as appropriate:
 - a. Identification of the references and established guidance which will be used in designing the selected corrective measure. Justification for the selection of this procedure should also be provided.

- b. A description of the procedures which will be used to complete the design of the corrective measure.
- c. Identification of assumptions to be used in the design, and the impact these assumptions have on the overall corrective measure;
- d. Significant data to be used in the design effort;
- e. Identification and discussion of the major equations to be used in the design effort (including a reference to the source of the equations);
- f. Sample calculations to be used in the design effort;
- g. Conceptual process/schematic diagrams;
- h. A site plan showing a preliminary layout of the selected corrective measure;
- i. Tables giving preliminary mass balances;
- j. Site safety and security provisions.

This information will form the technical basis for the detailed design of the remedial measure and the preparation of construction plans/specifications.

- 10. <u>Identification of Required Permits</u>. This section should identify and describe any necessary permits associated with the selected corrective measure, as well as the procedures which will be used to obtain these permits.
- 11. <u>Long-lead Procurement Considerations</u>. This section should identify any elements/components of the selected corrective measure which will require a large amount of time to obtain/install. The following issues should also be discussed: (1) the reason why it will take a large amount of time to obtain/install the item; (2) the length of time necessary for procurement and (3) recognized sources of such items.
- 12. <u>Project Management</u>. This section should contain information regarding the procedures and personnel which will be involved in completing the design of the selected corrective measure. A schedule for completing the design should also be provided.

3.0 PHASE II OF THE CMP

Once the Illinois EPA approves the Conceptual Design Report, the facility should complete the design of the approved corrective action (Phase II of the CMP). Upon final completion of the design, a Final Design Report, consisting of final plans, specifications, construction work plan, etc., must be submitted to the Illinois EPA for review and approval.

Several documents must be submitted to the Illinois EPA as part of Phase II of the CMP. The following text describes the expected contents of the various documents which should be developed and submitted to the Illinois EPA as part of Phase II of the CMP.

- 1. Final Design Report and Construction Work Plan. The Final Design Report and Construction Work Plan must contain the detailed plans, specifications and drawings needed to construct the corrective measure. In addition, this document must contain (1) calculations, data etc., in support of the final design; and (2) a detailed description of the overall management strategy, construction quality assurance procedures and schedule for constructing the corrective measure. It must be noted that the approved Conceptual Design Report forms the basis for this final report. The information which should be provided in this document includes:
 - a. <u>Introduction/Purpose</u>. This portion of the document should: (1) provide background information regarding the project, (2) describe the purpose and goals of the project, and (3) describe the scope of the project.
 - b. Detailed Plans of the Design System, including the following:
 - 1. Plan views;
 - 2. Section and supplementary views which, together with the specifications and general layouts, facilitate construction of the designed system;
 - 3. Dimensions and relative elevations of structures:
 - 4. Location and outline form of the equipment;
 - 5. Ground elevations; and
 - 6. Descriptive notations, as necessary, for clarity.
 - c. <u>Technical Specifications</u>. Complete technical specifications for the construction of the system, including, but are not limited to, the following:

- 1. All construction information, not shown in the drawings, which is necessary to inform the contractor in detail as to the required quality of materials, workmanship, and fabrication of the project;
- 2. The type, size, strength, and operating characteristics of the equipment;
- 3. The complete requirements for all mechanical and electrical equipment, including machinery, valves, piping and jointing of pipe;
- 4. Electrical apparatus, wiring and meters;
- 5. Construction materials;
- 6. Chemicals, when used;
- 7. Miscellaneous appurtenances;
- 8. Instruction for testing materials and equipment as necessary; and
- 9. Availability of soil boring information.
- d. <u>Project Management</u>. A description of the construction management approach, including the levels of authority and responsibility, lines of communication and qualifications if key personnel who will direct corrective measures construction/installation must be provided in the work plan.
- e. <u>Construction Quality Assurance/Quality Control</u>. A construction quality assurance/quality control plan describing the procedures which will be followed to ensure the corrective measure is constructed/installed in accordance with the approved plans and specifications.
- f. <u>Schedule</u>. The work plan must contain a schedule for completion of all major activities associated with construction/installation of the selected corrective measures. All major points of the construction/installation should be highlighted.
- g. <u>Waste Management Practices</u>. This portion of the document should identify the wastes anticipated to be generated during the construction/installation of the corrective measures, and provide a description of the procedures for appropriate characterization and management of these wastes.

- h. Required Permits. Copies of permit applications submitted to other Bureaus of the Illinois EPA for the selected corrective measure must be provided in the report. If it is determined that no permit is required for construction/installation and implementation of the corrective measures, rationale and justification must be provided to support this contention.
- i. <u>Cleanup Verification</u>. The report must contain the procedures which will be followed that the approved remediation objectives have been achieved when operation of the system is completed.
- 2. Operation and Maintenance Plan. An Operation and Maintenance Plan must be developed and submitted as part of Phase II of the CMP. This plan should outline the procedures for performing operations, long term maintenance, and monitoring of the corrective measure.
 - a. <u>Introduction and Purpose</u>. This portion of the document should provide a brief description of the facility operations, scope of the corrective measures project, and summary of the project objectives.
 - b. <u>System Description</u>. This portion of the document should provide a description of the corrective measure and significant equipment, including manufacturer's specifications. This portion of the permit should also include a narrative of how the selected system equipment is capable of complying with the final engineered design of the corrective measure.
 - c. <u>Operation and Maintenance Procedures</u>. This portion of the document should provide a description of the normal operation and maintenance procedures for the corrective measures system, including:
 - 1. Description of tasks for operation;
 - 2. Description of tasks for maintenance;
 - 3. Description of prescribed treatment or operation conditions; and
 - 4. Schedule showing the frequency of each operation and maintenance task.
 - d. <u>Inspection Schedule</u>. This portion of the document should provide a description of the procedures for inspection of the corrective measures system, including problems to look for during the inspection procedure, specific inspection items, and frequency of the inspections.

- e. <u>Waste Management Practices</u>. This portion of the document should provide a description of the wastes generated by the corrective measure, and the appropriate procedures for proper characterization/management of these wastes.
- f. <u>Contingency Procedures</u>. This portion of the document should provide a description of the procedures which will address the following items:
 - 1. System breakdowns and operational problems including a list of redundant and emergency backup equipment and procedures;
 - 2. Alternative procedures (i.e., stabilization) which are to be implemented in the event that the corrective measure fails. The alternative procedures must be able to prevent release or threatened releases of hazardous wastes/hazardous constituents which may endanger human health and the environment, or exceed cleanup standards.
 - 3. Notification of facility and regulatory personnel in the event of a breakdown in the corrective measures, including written notification identifying what occurred, what response action is being taken and any potential impacts on human health and the environment.

4.0 PHASE III OF THE CMP

Once the final design report is approved by the Illinois EPA, construction/installation of the approved corrective measure must commence. During this period, quarterly reports should be submitted which contain the following information:

- 1. Summary of activities completed during the reporting period;
- 2. An estimate of the percentage of the work completed;
- 3. Summaries of all actual or proposed changes to the approved plans and specifications or its implementation;
- 4. Summaries of all actual or potential problems encountered during the reporting period;
- 5. Proposal for correcting any problems; and
- 6. Projected work for the next reporting period.

Upon completion of construction/installation of the approved corrective measure, a Construction Completion Report must be submitted to the Illinois EPA documenting that these efforts were carried out in accordance with the Illinois EPA approved plans and specifications. This report should contain a thorough description of the efforts that went into constructing/installing the corrective measure and demonstrate that the procedures in the Illinois EPA-approved Final Design Report were followed during this effort. Such a report should be formatted in a logical and orderly manner and contain the following information:

- 1. An introduction discussing the background of the project and the purpose and scope of the corrective measure described in the report.
- 2. Identification of the plans, technical specifications and drawings which were used in constructing/installing the corrective measure. These specifications and drawings should have been approved by the Illinois EPA during Phase II.
- 3. Identification of any variations from the Illinois EPA approved plans, technical specifications and drawings used in construction/installing the corrective measure. Justification regarding the need to vary from the approved plans and specifications must also be provided.
- 4. A description of the procedures used to construct/install the corrective measure, including the procedures used for quality assurance and quality control.
- 5. As-built drawings, including identification of any variations from the approved plans, technical specifications and drawings.
- 6. A summary of all test results from the construction/installation effort, including quality assurance/quality control testing.
- 7. Actual test results, including quality assurance/quality control test results. These results should be located in an attachment/appendix and be well organized.
- 8. Identification of any test results which did not meet the specified value and a description of the action taken in response to this failure, including re-testing efforts.
- 9. Photographs documenting the various phases of construction.
- 10. A detailed discussion of how the construction/installation effort met the requirements of the approved Final Design Report.

11. A certification meeting the requirements of 35 Ill. Adm. Code 702.126 by an independent qualified, licensed professional engineer and by an authorized representative of the owner/operator.

5.0 PHASE IV OF THE CMP

Once the corrective measure has been constructed/installed, it must be operated, maintained and monitored in accordance with the approved plans and specifications (this is Phase IV of the CMP). During this period, quarterly reports must be submitted to the Illinois EPA documenting the results of these efforts. These reports include the following:

- 1. <u>Introduction</u>. -- A brief description of the facility operations, scope of the corrective measures project, and summary of the project objectives.
- 2. <u>System Description</u>. -- A description of the corrective measures constructed/installed at the site, and identify significant equipment. Describe the corrective measure and identify significant equipment.
- 3. Monitoring Results. -- A description of the monitoring and inspection procedures to be performed on the corrective measures. A summary of the monitoring results for the corrective measures, including copies of any laboratory analyses which document system effectiveness, provide a description of the monitoring procedures and inspections performed, and include a summary of the monitoring results for the corrective measure. Copies of all laboratory analytical results which document system monitoring must be provided.
- 4. <u>Effectiveness Determination</u>. Calculations and other relevant documentation which demonstrates the effectiveness of the selected corrective measure in remediating/stabilizing contamination to the extent anticipated by the corrective measures final design. Copies of relevant analytical data should be provided to substantiate this determination.
- 5. System Effectiveness Recommendation. -- Based upon the results of the effectiveness determination required under Item 4 above, recommendations on continued operation of the corrective measure must be provided. If the corrective measure is not performing in accordance with the final design, a recommendation on revisions or expansion of the system should be provided.

6.0 PHASE V OF THE CMP

Once all corrective measures have been completed, a report must be developed documenting all the efforts which were carried out as part of implementing the corrective measure and demonstrating, as appropriate, that the approved remediation objectives have been achieved. This report should contain a compilation of all previous reports and also contain sufficient information to demonstrate that the approved remediation objectives have been achieved. It must be noted that such a report will not be developed for a unit closed as a landfill until the post-closure care period has been completed.

7.0 PROCEDURES WHICH SHOULD BE FOLLOWED WHEN SOIL REMOVAL IS THE SELECTED CORRECTIVE MEASURE

Sections 2.0 through 6.0 above describe the procedures which should be followed when it is necessary to design some type of physical corrective measure (e.g., a final cover system, some type of treatment system, etc.). However such detail is not necessary if excavation/removal is selected as the remedial action for the contaminated soil encountered at the site. In general, a work plan should be developed for this effort (for Illinois EPA review and approval) which fully describes each step to be used in removing the contaminated soil from the property. This includes a description of (1) the equipment utilized in the removal effort, (2) the pattern followed in removing the soil; (3) the depth to which the soil will be removed; (4) management of the soil on-site after it is removed from the ground; (5) loading areas; (6) the ultimate destination of the soil; and (7) any other steps critical to the removal effort.

One way to conduct a soil removal effort is to collect and analyze a sufficient number of soil samples to clearly determine the horizontal and vertical extent of soil contamination <u>prior</u> to conducting the soil removal effort. The boundaries of soil which must be removed are defined by the Illinois EPA established cleanup objectives for the project. Soil excavation must extend to sample locations where soil test results indicate that the remediation objectives are met. Closure verification sampling is not necessary in such cases, if a registered professional engineer oversees the soil removal effort and certifies that the remediation limits extend to these boundaries.

Another way to conduct a soil removal effort is to collect and analyze a limited number of soil samples <u>prior</u> to the soil removal effort and to rely mainly on field observation to determine the extent of the soil removal. In such cases closure verification sampling is necessary. Soil samples must be collected for analysis from the bottom and sidewalls of the final excavation. The following sampling/analysis effort is necessary to demonstrate that the remaining soil meets the established cleanup objectives:

- 1. A grid system should be established over the excavation.
- 2. Samples should be collected from the floor of the excavation at each grid intersection, including intersections along the perimeter of the excavation.
- 3. Samples should be collected at 6"-12" below the ground surface (bgs) along the excavation sidewalls at each grid intersection around the excavation perimeter. Samples must also be collected at the midpoint of the excavation wall at each grid intersection along the excavation perimeter.
- 4. Collection/analysis of all required samples must be in accordance with the procedures set forth in the approved plan.
- 5. Soil samples which must be analyzed for volatile organic compounds (VOCs) must be collected in accordance with the procedures set forth in Method 5035 of SW-846. In addition, such samples must be collected 6"-12" beneath the floor/sidewalls of the excavation to minimize the possibility of volatilization of the contaminants prior to the collection of the samples.
- 6. No random sampling may be conducted to verify achievement of cleanup objectives have been met.
- 7. Additional soil must be removed, as necessary, until it can be demonstrated that the remaining soil in and around the area of concern meets the established cleanup objectives. Additional samples must be collected and analyzed in accordance with the procedures described above from areas where additional soil has been removed.

SFN:JF:bjh\051161s.doc

ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

1021 NORTH GRAND AVENUE EAST, P.O. BOX 19276, SPRINGFIELD, ILLINOIS 62794-9276 – (217) 782-3397 JAMES R. THOMPSON CENTER, 100 WEST RANDOLPH, SUITE 11-300, CHICAGO, IL 60601 – (312) 814-6026

ROD R. BLAGOJEVICH, GOVERNOR

DOUGLAS P. SCOTT, DIRECTOR

217/524-3300 August 28, 2007

Certified Mail 7004 2510 0001 8617 3643 7004 2510 0001 8617 3650

Illinois International Port District 3600 East 95th Street 95th & The Lakefront Chicago, Illinois 60617-5193

Clean Harbors Svcs Inc 11800 South Stony Island Avenue Chicago, Illinois 60607

Re: 0316000051 -- Cook County Clean Harbors Svcs, Inc. ILD000608471 Log No. B-16R-M-8 RCRA Permit File



Dear Mr. Laubsted:

This letter is in response to your Class I modification requested dated May 23, 2007 to modify the contingency plan. The Illinois EPA has approved your modification request to change the primary emergency coordinator.

This determination is based upon our review of (1) the RCRA Part B Permit issued to CHSI, (2) regulations [35 Ill. Adm. Code, Subtitle G] and (3) the information contained in your submittals. Operations must be conducted in accordance with the approved RCRA Part B Permit originally issued to CHSI and all subsequent modifications to the Part B Permit.

Since this modification did not result in any changes to the language of the Permit, only the cover page reflecting the approval of this modification is being sent to you. This letter and the enclosed cover page should be attached to the front of your Part B Permit. Operations must be conducted in accordance with the approved RCRA Part B Permit issued to Clean Harbors Svcs, Inc., and all subsequent modifications to the Part B Permit.

Work required by this permit, your application or the regulations may also be subject to other laws governing professional services, such as the Illinois Professional Land Surveyor Act of 1989, the Professional Engineering Practice Act of 1989, the Professional Geologist Licensing Act, and the Structural Engineering Licensing Act of 1989. This permit does not relieve anyone from compliance with these laws and the regulations adopted pursuant to these laws. All work that falls within the scope and definitions of these laws must be performed in compliance with them. The Illinois EPA may refer any discovered violation of these laws to the appropriate regulating authority.



ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

1021 NORTH GRAND AVENUE EAST, P.O. BOX 19276, SPRINGFIELD, ILLINOIS 62794-9276 – (217) 782-3397 JAMES R. THOMPSON CENTER, 100 WEST RANDOLPH, SUITE 11-300, CHICAGO, IL 60601 – (312) 814-6026

ROD R. BLAGOJEVICH, GOVERNOR

DOUGLAS P. SCOTT, DIRECTOR

ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

HAZARDOUS WASTE MANAGEMENT RCRA PART B PERMIT

IEPA 0316000051 -- Cook County USEPA ILD000608471 Clean Harbors Svcs Inc Permit Log No. B-16R-M-8 RCRA -- Part B – Permit File Issue Date: November 4, 2005 Effective Date: December 9, 2005 Expiration Date: December 9, 2016

Modification Effective Date: May 23, 2007

Illinois International Port District 3600 East 95th Street 95th & the Lakefront Chicago, Illinois 60617-5193 Clean Harbors Svcs Inc 11800 South Stony Island Avenue Chicago, Illinois 60617

A Part B permit is hereby approved pursuant to the Resource Conservation and Recovery Act, Illinois Environmental Protection Act, and Title 35 Illinois Administrative Code (I.A.C.) parts 702, 703, 705, and 720 through 729 to Clean Harbors Svcs Inc and the Illinois International Port District (herein known as the Permittee(s)), to construct, maintain and operate a waste management facility involved in the treatment and storage of hazardous waste. The site is located at 11800 South Stony Island Avenue in Chicago, Illinois.

This permit consists of the conditions contained herein (including those in any attachments and appendices) and applicable regulations contained in the Illinois Environmental Protection Act and Title 35 I.A.C. Parts 702, 703, 705 and 720 through 729 in effect on the effective date of this permit. The Environmental Protection Act (Ill. Rev. Stat., Chapter 111 1/2, Section 1039) grants the Illinois Environmental Protection Agency the authority to impose conditions on permits which are issued. This Permit contains 225 pages including Attachments A through I.

If you have any questions regarding this final permit, please contact Amy Boley at 217/558-4716.

Stephen F. Nightingale, P.É Manager, Permit Section

Bureau of Land

SFN:MAS:bjh\051161s.doc

cc: USEPA Region V



11800 South Stony Island Avenue Chicago, IL 60617 773.646.6202 Fax 773-646-6381 www.cleanharbors.com RECEIVED

AUG 0 9 2007

OFFICE OF REGIONAL ADMINISTRATOR

NOTICE

August 7, 2007

To: Facility Mailing List Addresses

Re: Clean Harbors Services, Inc.

Notification of RCRA Class 1 & 1* Permit Modifications

Clean Harbors Services, Inc. (CHSI) is a permitted hazardous waste treatment, storage and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHSI currently operates under a RCRA Part B permit issued by the IEPA on November 4, 2005.

On May 23, 2007 CHSI requested a Class 1 permit modification to the facility's Contingency Plan including a new primary emergency coordinator. This Class 1 modification does not require prior approval by IEPA.

On October 6, 2006 CHSI requested a Class 1* permit modification requesting addition of several parameters to the groundwater monitoring program. On March 26, 2007 CHSI requested modification to the permit requirement for addition of parameters to groundwater monitoring following 35 Ill. Adm. Code, 620.420(a)(2). This Class 1* modification was approved by IEPA on May 9, 2007.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations in 35 IAC 703.281(a)(2) which require a notice of the modification be sent to all persons on the facility mailing list within 90 days after the change is put into effect or within 90 days of IEPA approval.

If you have any further questions regarding this notice, please contact me at (773) 646-6202, x233.

Sincerely,

Yames R. Laubsted

Facility Compliance Manager



ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

1021 NORTH GRAND AVENUE EAST, P.O. BOX 19276, SPRINGFIELD, ILLINOIS 62794-9276 – (217) 782-3397, JAMES R. THOMPSON CENTER, 100 WEST RANDOLPH, SUITE 11-300, CHICAGO, IL 60601 – (31/27-814/6026);

ROD R. BLAGOJÉVICH, GOVERNOR

DOUGLAS P. SCOTT, DIRECTO

217/524-3300

May 9, 2007

Certified Mail 7004 2510 0001 8616 Waste, Pestinided 5 Trains Civilian
U.S. EPA - KEGION 5

Clean Harbors Services, Inc. Attn: Jim Laubsted 11800 South Stony Island Avenue Chicago, Illinois 60617

Re:

0316000051 -- Cook County Clean Harbors Services, Inc. ILD000608471

Log No. B-16R-M-6

Received: October 10, 2006

RCRA Permit

Dear Mr. Laubsted:

This letter is in response to your submittal entitled, "Class 1* Permit Modification Request", dated October 6, 2006, requesting modification to the RCRA Part B Permit (Permit) for Clean Harbors Services, Inc. (Clean Harbors) Chicago facility. Specifically, the modification requested to add several parameters to the list of quarterly monitored groundwater parameters in Condition II.E.1 of the Permit. The additional information submitted to the October 10, 2006 submittal was dated March 26, 2007 and received by the Illinois EPA on March 28, 2007. The Additional Information requests modified language to Condition III.F.3.

The subject submittals were reviewed as a Class 1* permit modification request in accordance with 35 Ill. Adm. Code 703, Subpart G, and are hereby approved. This determination is based upon our review of (1) the Permit issued to CHSI, (2) the regulations [35 Ill. Adm. Code, Subtitle G] and (3) the information contained in your submittals. Operations must be conducted in accordance with the approved Permit originally issued to CHSI and all subsequent modifications to the Permit. Condition III.F.3 of the Permit has been modified to reflect this change. Only the revised Illinois EPA Permit is enclosed, since no modification to the USEPA portion of the permit was made. Attachment 1 to this letter provides the modified Condition III.F.3.

Work required by this permit, your application or the regulations may also be subject to other laws governing professional services, such as the Illinois Professional Land Surveyor Act of 1989, the Professional Engineering Practice Act of 1989, the Professional Geologist Licensing Act, and the Structural Engineering Licensing Act of 1989. This permit does not relieve anyone from compliance with these laws and regulations adopted pursuant to these laws. All work that falls within the scope and definitions of these laws must be performed in compliance with them.

The Illinois EPA may refer any discovered violation of these laws to the appropriate regulating authority.

Should you have any questions or comments regarding groundwater, please contact Amy Boley of my staff at 217/558-4716. Should you have any other questions regarding other portions of the Permit, please contact Mark A. Schollenberger of my staff at 217/524-3307.

Sincerely,

Stephen F. Nightingale, P.E. Manager, Permit Section

Bureau of Land

SFN:AB:bjh\072525s.doc

AMB -OM

cc: Harriet Croke, USEPA Region 5
Illinois International Port District

Attachment 1

Condition III.F.3 has been modified as follows:

"3. The Permittee, after following the requirements of 35 Ill. Adm. Code 724.199(g), shall add to the constituent list of quarterly monitoring parameters identified in Condition III.E.1, except those identified in 35 Ill. Adm. Code, 620.420(a)(2), any constituent which has been found at a concentration above its respective PQL at any monitoring well at the point of compliance subsequent to the analyses required by Condition III.F.1.b."

SFN:AB:bjh\072525s.doc



ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

1021 NORTH GRAND AVENUE EAST, P.O. BOX 19276, SPRINGFIELD, ILLINOIS 62794-9276 – (217) 782-3397 JAMES R. THOMPSON CENTER, 100 WEST RANDOLPH, SUITE 11-300, CHICAGO, IL 60601 – (312) 814-6026

ROD R. BLAGOJEVICH, GOVERNOR

DOUGLAS P. SCOTT, DIRECTOR

ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

HAZARDOUS WASTE MANAGEMENT RCRA PART B PERMIT

IEPA 0316000051 -- Cook County USEPA ILD000608471 Clean Harbors Svcs Inc Permit Log No. B-16R-M-6 RCRA -- Part B – Permit File Issue Date: November 4, 2005 Effective Date: December 9, 2005 Expiration Date: December 9, 2016 Modification Effective Date: May 9, 2007

Illinois International Port District 3600 East 95th Street 95th & the Lakefront Chicago, Illinois 60617-5193 Clean Harbors Svcs Inc 11800 South Stony Island Avenue Chicago, Illinois 60617

A Part B permit is hereby approved pursuant to the Resource Conservation and Recovery Act, Illinois Environmental Protection Act, and Title 35 Illinois Administrative Code (I.A.C.) parts 702, 703, 705, and 720 through 729 to Clean Harbors Svcs Inc and the Illinois International Port District (herein known as the Permittee(s)), to construct, maintain and operate a waste management facility involved in the treatment and storage of hazardous waste. The site is located at 11800 South Stony Island Avenue in Chicago, Illinois.

This permit consists of the conditions contained herein (including those in any attachments and appendices) and applicable regulations contained in the Illinois Environmental Protection Act and Title 35 I.A.C. Parts 702, 703, 705 and 720 through 729 in effect on the effective date of this permit. The Environmental Protection Act (Ill. Rev. Stat., Chapter 111 1/2, Section 1039) grants the Illinois Environmental Protection Agency the authority to impose conditions on permits which are issued. This Permit contains 225 pages including Attachments A through I.

If you have any questions regarding this final permit, please contact Amy Boley at 217/558-4716.

Stephen F. Nightingale, P.E.

Manager, Permit Section

Bureau of Land

SFN:MAS:bjh\051161s.doc

cc: USEPA: Region V

RCRA HAZARDOUS WASTE MANAGEMENT PERMIT CLEAN HARBORS SVCS INC

LPC 000608471

TABLE OF CONTENTS

	<u>ITEM</u>	PAGE(S)
Gen	eral Facility Description	i
	of Plans and Documents Contained ne Approved Permit Application	ii ·
I.	Containers	I-1 - I-20
II.	Tank Systems	II-1 - II-14
III.	Groundwater Monitoring	III-1 - III-13
IV.	Reporting and Notification Requirements	IV-1 - IV-9
V.	Corrective Action	V-1 - V-9
VI.	Standard Conditions	VI-1 - VI-13
VII.	Miscellaneous Units	VII-1 - VII-11
VIII	Special Conditions	VIII-1 – VIII-12
IX.	Air Emission Standards for Equipment Leaks	IX-1 – IX-8
X.	Air Emission Standards for Tanks, Surface Impoundments	V 1 V A

LIST OF ATTACHMENTS

	<u>PAGES</u>
Attachment A - List of Wastes that can be Accepted at this Facility	A-1 - A-40
Attachment B - Inspection Schedule	B-1 - B-10
Attachment C - Construction Certification Form and Instructions	C-1 - C-2
Attachment D - Closure Certification Form	D-1
Attachment E - Approved Permit Section Identification	E-1 - E-23
Attachment F - Financial Assurance Requirements	F-1 - F-3
Attachment G - Groundwater Monitoring Diagram, Log Report, Procedures	
Attachment G.1 - Monitoring Well Construction Diagram	G-1
Attachment G.2 - Field Boring Log	G-2
Attachment G.3 - Well Completion Report	G-3
Attachment G.4 - IEPA Monitor Well Plugging Procedures	G-4
Attachment G.5 – Electronic Groundwater Submittal Forms	G-5 – G-7
Attachment G.6 – RCRA Facility Groundwater, Leachate and Gas Reporting Form (LPC-592)	G-8
Attachment H – Status of Corrective Action at Facility	
Attachment H.1 – Interim Status Closure Effort at the Former CWM Portion of the Facility	H.1-1 – H.1-4
Attachment H.2 – 1994-95 Construction Efforts at the Former CWM Portion of the Facility	H.2-1 – H.2.3

Attachment H.3 – Corrective Action Efforts at the Original
Clean Harbors Facility

Attachment H.4 – Corrective Action Efforts at the Former
CWM Portion of the Facility

Attachment I - RCRA Corrective Measures Program Requirements

I-1 – I-12

SFN:MAS:bjh\051161s.doc

DESCRIPTION OF THE FACILITY

The Clean Harbors Svcs Inc (CHSI) facility has been a RCRA regulated hazardous waste management facility since 1980. The facility receives containers of wastes in trucks. Bulk liquids are received in both tank truck and rail cars. Its present activities include the storage and treatment of aqueous based waste streams, fuel blending, venting of gas cylinders, treatment of black powder through the addition of water, treatment of containers containing FB5 (high BTU containing) wastes with dry ice, treatment of cyanide wastes in containers, treatment of peroxide wastes in containers, stabilization of wastes in containers, and the storage, consolidation, and transfer of containerized hazardous and nonhazardous wastes, including lab packs. The CHSI facility is located on approximately 56.6 acres in the City Services, Cook County, Illinois, at 11800 South Stony Island Avenue.

Modification Log No. B-16-M-2 to the facility's RCRA permit incorporated the adjacent CWM facility into the CHSI permit. Before it was shut down in 1991, CWM managed RCRA and TSCA (PCBs) wastes in containers, tanks, an incinerator and surface impoundments.

Pre-1980 activities at the CHSI facility included landfilling, injection of wastewaters into a well and neutralization of wastewaters in impoundments. Pre-1980 activities at the CWM facility included landfilling, biological treatment in piles, treatment in surface impoundments, incineration, and storage in tanks and containers.

SFN:MAS:bjh\051161s.doc

List of Plans and Documents Contained in the Approved Permit Applications

Under Illinois solid and hazardous waste regulations, the Permittee(s) has prepared the following formal plans and documents covering various facets of the design, operation and monitoring of hazardous waste management units. The location of each plan or document in the Approved Permit Application is also identified below.

	Plan or Document	Location in the Approved Permit Application
1.	Waste Analysis Plan	Section C-2
2.	Inspection Plan	Section F-2
3.	Contingency Plan	Section G
4.	Closure Plan	Section I
5.	Training Program	Section H
6.	Design Plans and Operating Specifications For Containers	Section D-1, Table D-7
7.	Design Plans and Operating Specifications For Tank Systems	Section D-2, Table D-3 through D-6

SFN:MAS:bjh\051161s.doc

SECTION I: CONTAINER STORAGE

A. Summary

Containers of hazardous waste received at the facility will arrive in a variety of containers but typically in 55 gallon steel or plastic drums, 30 cubic yard roll-off boxes, or tanker trucks. Other containers may be accepted provided they are Department of Transportation ("DOT") approved, in good condition, compatible with the waste they contain and can be safely managed by facility. These containers shall only be stored in the areas designated in Condition I(B)(1).

B. Waste Identification

1. The storage of all hazardous waste containers shall be in the areas identified below:

a. Existing Units - Drums

i. Outside Storage Area (Unit R1)

Bay	Containment Volume	Maximum Number of 55 Gallon Drums Or Equivalents
Staging area	2,500 gallons	160 drums
Flammable Storage #1	4,693 gallons	160 drums
Flammable Storage #2	4,693 gallons	160 drums
Oxidizers Storage #1	2,767 gallons	96 drums
Reactives Storage #1	2,767 gallons	96 drums
Poisons Storage #1 TOTAL	2,767 gallons	96 drums 768 drums (42,240 gallons)

Or Equivalents

192 drums

, 96 drums

192 drums

72 drums

552 drums (30,360 gallons)

0316000051 Clean Harbors Svcs Inc RCRA Log No. B-16R-M-6

Bay

Acidic-1

Acidic-2

Alkaline

Staging

TOTAL

	•
Containment Volume	Maximum Number of 55 Gallon Drums Or Equivalents
17,166 gallons	8 drums (440 gallons)
xpansion (Unit R2)	
Containment Volume	Maximum Number of 55 Gallon Drums Or Equivalents
2,767 gallons	96 drums
2,767 gallons	96 drums
2,767 gallons	96 drums
	TAL 368 drums (20,240 gallons)
unit G1)	
Containment	Maximum Number of 55 Gallon Drums

Volume

1,305 gallons

558 gallons

1,084 gallons

860 gallons

v. Container Storage Building (Unit 25)

Bay	Containment Volume	Maximum Number of 55 Gallon Drums Or Equivalents
Alkaline/Poisons/PCBs Acids	7,189 gallons 4,322 gallons	248 drums 136 drums
Flammabl	e 7,302 gallons	184 drums
Truck Pad	5,447 gallons	88 drums
TOTAL		656 drums
		(36,080 gallons)

Non-RCRA hazardous, atmospheric gases may be vented to the atmosphere in this area as described in the application identified as Log No. B-16R, Appendix D-38.

RCRA regulated oxygen may be vented to the atmosphere in Unit 25 as described in the application identified as Log No. B-16R, Appendix D-38. Operations shall cease if the oxygen concentration rises above 23.5%. Operations may continue once the concentration falls below 23.5%. Oxygen shall not be vented when flammable containers are open or in the process of being moved, consolidated or sampled.

The maximum amount of drums that may be in the alkaline bay is limited to 4,015 gallons (73 55-gallon drums) when the lamp crusher is in the unit.

	•		Maximum Number of 55 Gallon
		Containment Volume	Drums Or Equivalents
vi.	Ignitable Container Management Building (Unit 26)	12,415 gallons	192 drums (10,560 gallons)

	vii.	Container Handling Dock (Unit 61)	Containment Volume 8,620 gallons	Maximum Number of 55 Gallon Drums Or Equivalents 160 drums (8,800 gallons)
		Dock (Ont of)	•	(0,000 ganons)
b.	<u>Exis</u>	ting Units - Bulk Solids		
•			Containment Volume	Maximum No. of 30 Cubic Yard Roll-Off Boxes
	i.	Bulk Container Storage Area (Unit Q1)	26,391 gallons	3 Roll-off Boxes (90 cubic yards)
٠.	ii.	Bulk Solids Storage Pad (Unit B)	2,929 gallons per bay	8 Roll-Off Boxes (240 cu. yds.)
c.	Exis	<u>ting Units - Transporter Sto</u>	rage/Staging	
		<u>Unit</u>	Containment Volume	Maximum No. of 7200 Gallon Tank Trucks
	i.	Truck Unloading Area And Bulking Area (Unit Q)	26,391 gallons	3 Trucks (21,600 gallons)
	ii.	Truck Unloading Dock (Unit V)	35,311 gallons	3 trucks
	iii.	Truck Staging Area (Unit C)[2 containment systems]	12,583 gallons each	3 trucks 3 trucks

iv.	Truck Staging Area (Unit 59)	17,185 gallons	3 trucks
v.	Truck Unloading Platform (Unit 15)	13,054 gallons	2 trucks
vi.	Truck Pad (Unit 62)	22,665 gallons	4 trucks
vii.	Rail Car Unloading Area (Unit 13)	33,151 gallons	2 rail cars (60,000 gallons)

d. Proposed Areas - Drums

i. Drum Storage Area Expansion (Unit R2)

		Maximum Number of 55 Gallon
	Containment	Drums
Bay	Volume	Or Equivalents
Flammable Storage #3	4,693 gallons	160 drums
TOTAL		160 drums
		(8,800 gallons)

ii. The Lab Pack Repack and Consolidation Area (Unit U)

	Containment	Maximum Number of 55 Gallon Drums
Bay	Volume	Or Equivalents
Acids Storage Area	63 gallons	5 drums
Bases Storage Area	63 gallons	5 drums
Organics Storage Area	63 gallons	5 drums
Oxidizers Storage Area	63 gallons	5 drums
Pesticides Storage Area	63 gallons	5 drums
Organics pour-off area	71 gallons	4 drums

Flammables Storage Area

83 gallons

6 drums

TOTAL

35 drums

(1,925 gallons)

iii. The Paint and Paint Related Processing Area (Building 42)

Maximum Number

of 55 Gallon

Containment

Drums

<u>Bay</u>

Volume

Or Equivalents

Westside Pad

776 gallons

24 drums

Building Hopper (405) 1378 gallons

28 drums 1 64 cu. ft. hopper

Total 52 drums

(2860 gallons) - plus one 64 cu. ft. hopper

iv Shredder Process Building - Unit 24/ Runway Between West Side Pad and Truck Pad - Unit 70

Conveyor to Shredder

5834 gallons (Area 24)

16 drums

Drum (412)

548 gallons (Area 70)

1 drum

Tote (407)

1 64 cu. ft. hoper

v. Metal Wash Pad - Unit 68

Drum (434)

5278 gallons

1 drum

e. Proposed Units - Bulk Solids

Maximum Number

30 Cubic Yard

Containment

Comaninen

Roll-Off Drums

Unit

Volume

Or Equivalents

i. Listed Waste Roll-off

(Unit Z1)

14,697 gallons

1 Roll-Off Box (30 cu. yds.)

f. Proposed Units - Transporter Storage/Staging

	<u>Unit</u>	Containment Volume	Maximum Number of 7200 Gallon Trucks
i.	Truck Loading/ Unloading Pad (Unit)	6,600 gallons X)	2 trucks
ii.	Truck to Truck Transfer Pad (Unit W	45,708 gallons	4 trucks
iii.	Truck Loading/Unloading Pa	14,740 gallons ad (Unit 69)	2 trucks

- 2. The Permittee(s) may receive and store containerized hazardous waste identified in Attachment A and/or any nonhazardous waste which has been approved by the Illinois EPA. All waste must be evaluated through the waste analysis plan for compatibility.
- 3. The Permittee(s) is prohibited from storing a hazardous waste that has not been identified in Attachment A.
- 4. The Permittee(s) is prohibited from storing containers of waste in areas other than those specified in Condition I(B)(1) above without the appropriate permit modification in accordance with 35 Ill. Adm. Code 703 Appendix A.
- 5. The Permittee may store one 30 ft. van trailer in each individual bay in Unit B. The Permittee may also store two 20 ft. tandem trailers in Bay 5 and Bay 6 in lieu of a 30 ft. van trailer. No more than 80 55 gallon drums (4400 gallons) shall be placed in each truck.
- 6. Each tanker truck in Unit 69 may be substituted with a roll-off container, van trailer or other transportation vehicle. Containers may also be placed in this unit if the contents will be pumped to the proposed tank farm (Unit 22). The substitute unit may be placed in the unit in lieu of a 7200 gallon truck provided the total gallons does not exceed 7200.

C. Condition of Containers

If a container holding waste is not in good condition (e.g., severe rusting, apparent structural defect, etc.) or if it begins to leak (this includes waste which appears on the outside of the drum/box but has not spread to the containment base or other containers), the Permittee(s)

must immediately transfer the waste from this container to a container that is in good condition or manage the waste in accordance with the Approved Permit Application.

- 2. Any transfer of waste which was required to comply with I(C)(1), must be recorded in a separate log and maintained as part of the facilities operating record.
- 3. Packaging of all wastes accepted for storage in the container storage area shall meet the requirements of 49 CFR 172, 178 and 179 and all applicable D.O.T. and N.F.P.A. regulations. All containers must be marked and labeled in accordance with 49 CFR 172.
- 4. The contents of each container shall be clearly identified on the side of the container in accordance with 49 CFR 172 prior to being placed in the container storage area.

D. Compatibility of Waste With Containers

The Permittee(s) must use a container made of or lined with material which will not react with and is otherwise compatible with the waste to be stored so that the ability of the container to contain the waste is not impaired.

E. Management of Containers

The Permittee(s) shall comply with the following management practices:

- 1. A container holding waste must always be closed during storage, except when it is necessary to add or remove or sample waste.
- 2. A container holding waste must not be opened, handled, or stored in a manner that may rupture the container or cause it to leak.
- 3. All aisles between each row of pallets and between pallets and a wall in a pile must be a minimum of two feet wide. This is necessary to provide adequate access for the inspection of each container.
- 4. Containers may be stacked provided that:
 - a. Only the same size or smaller containers are stacked on top of the containers beneath.

- b. 55-gallon or larger containers are separated by a pallet or other dunnage to provide stability.
- c. A pallet for stability for smaller size containers shall be used when the height of the stack exceeds 42 inches unless the containers are shrink wrapped. 55-gallon or larger containers may be stacked 2-high with a pallet under each container. Smaller containers may be stacked as long as the height of the stack does not exceed the height of two 55 gallon containers on pallets (i.e. 84 inches).
- d. 55-gallon or larger containers may not be stacked in the flammable storage areas. Smaller containers may be stacked so long as the height of the stack does not exceed the height of one 55-gallon drum on a pallet (i.e. 42 inches).
- 5. The containers shall be clearly marked with the date received prior to being placed into storage.
- 6. Containers shall be positioned such that the markings and labels are readable during inspections.
- 7. The following management practices apply to arrangements of containers that contain one or more containers of flammable or combustible liquids as defined in NFPA 30.
 - Each arrangement of containers (pile) as defined below shall be separated from other arrangements by a five foot aisle. The maximum volume of containers in each arrangement shall not exceed the following:
 - i. 1,100 gallons for arrangements with one or more containers of waste which have a flash point below 73°F and a boiling point below 100°F.
 - ii. 2,200 gallons for arrangements with one or more containers of waste having a flash point below 73°F and a boiling point above 100°F.
 - iii. 4,400 gallons for arrangements with one or more containers of waste having a flash point at or above 73°F and below 100°F.
 - iv. 8,800 gallons for arrangements with one or more containers of waste having a flash point at or above 100°F and below 140°F.
 - v. 22,000 gallons for arrangements which do not contain one or more containers of waste having a flash point below 140°F.

- b. An aisle that is a minimum of two feet wide must be maintained within the arrangement between each row of pallets and between pallets and a wall in a pile. This is necessary to provide adequate access for the inspection of each container.
- The permittee shall not stack drums higher than the height of a 55-gallon drum (3 ft.) in the following areas: Building 61, Building 26, Building U, Building 42 including the West Side Pad and Unit 24.
- 9. The permittee may only store bulk solids in Building 26 if the bottom dimensions of the DOT approved bulk container (ie. box, tote tank, flex bin, etc.) do not exceed 4 feet by 4 feet. The arrangement of pallets or bulk containers in Building 26 shall comply with drawing 4210 sheet 2 of 3. Tote tanks shall not be stacked. The permittee is prohibited from staging or storing roll off boxes in Building 26.

F. Inspection

The Permittee(s) shall inspect the container storage area in accordance with the inspection schedule specified in Attachment B to this Permit and Section F of the approved permit application. The inspection must be adequate to detect leaks and deterioration of containers and the containment system caused by corrosion or other factors. The procedures described in the approved permit application must be used with the following modifications:

- 1. Action shall be taken to immediately overpack a leaking or deteriorating drum or to transfer the waste to a container in good condition. Appropriate action to clean up any release of waste from a leaking or deteriorated drum shall be carried out immediately after the drum has been overpacked or the waste transferred to a container in good condition.
- 2. If a portion of the containment system is found to be in a deteriorated condition (cracks, gaps, spalling, failure of the coating, etc.) the Permittee(s) shall immediately remove all waste containers from the deteriorated area until the containment system has been repaired.
- 3. The container storage, staging and loading/unloading areas shall be inspected daily for spills and releases. If spills and releases are observed, such releases shall immediately be remediated in accordance with all applicable regulations and special conditions found herein. Results of this inspection and a description of the corrective action taken, if necessary, shall be documented in the inspection log.
- 4. The inspection shall include checking aisle space, height of stacks, proper labeling and marking of containers, and remaining capacity.

5. Results of all inspections and the activities undertaken to correct deficiencies shall be documented in the operating record for the facility.

G. Containment

The Permittee(s) shall construct, operate and maintain the containment system according to the design plans and operating specifications contained in the Approved Permit Application, subject to the following modifications.

- 1. Clean Harbors shall perform a complete inspection of the surface coating yearly and perform annual maintenance to insure the integrity of the coating. Clean Harbors shall document the date of the surface coating inspection and any maintenance of the surface coating. These inspections must be performed no later than August 31, of each year.
- 2. It shall not be an act of non-compliance if the coating has been installed properly but does not live up to the manufacturer's printed performance standards and fails due to excessive wear or chemical breakdown. The Permittee(s) shall notify the Illinois EPA within thirty days of becoming aware of the failure. The Permittee(s) shall reapply a different coating specified in the approved permit application or submit a modification of its permit to install a new coating within 180 days of the failure of the coating.

H. Special Requirements for Ignitable or Reactive Waste

- 1. a. The Permittee(s) shall not locate containers which hold ignitable or reactive waste within 50 feet of the facility's property line.
 - b. Tank trucks containing ignitable liquids shall not be placed in Unit C.
- 2. The Permittee(s) shall take precautions to prevent accidental ignition or reaction of ignitable waste.
- 3. Ignitable wastes must be separated and protected from sources of ignition or reaction including but not limited to:
 - a. Open flames, smoking, cutting and welding, hot surfaces, frictional heat, sparks (e.g., static, electrical, or mechanical), spontaneous ignition (e.g., from heat producing chemical reactions), and radiant heat.
 - b. While ignitable waste is being handled, the Permittee(s) must confine smoking and open flame to specially designated locations.

- c. "No Smoking" signs must be conspicuously placed wherever there is a hazard from ignitable waste.
- 4. The following are allowed to be utilized for the container storage of flammable and combustible materials as defined by NFPA: Section VIII, Unit Storage Areas 61, Unit 26, Unit 25, Units R1/R2, Unit U, Unit 42, Unit 24/Unit 70, Unit 59, Unit 62, Unit 69, Unit B, Unit C, Unit Q, Unit V, Unit 13, Unit 15 and Unit W.

I. Special Requirements for Incompatible Waste

1. The Permittee(s) shall not store containers holding a material that is incompatible with any waste or other materials stored nearby, unless separated from other waste/materials or protected from them by means of a dike, berm or other devices. Incompatible materials are defined in Section VIII.(A)(4) to this permit.

J. General Operating Requirements

The Permittee(s) shall operate the container storage areas identified in Section B in accordance with the approved permit application, subject to the following modifications:

- 1. The Permittee(s) may receive hazardous waste for storage in containers provided the following requirements are met.
 - a. The material must be a waste which has been identified in Attachment A to this permit.
 - b. The waste must be analyzed in accordance with all applicable regulations, the approved waste analysis plan, and Conditions A.1 through A.8 in Section VIII of this Permit.
 - c. The waste must be accompanied by a properly completed Illinois manifest.
- 2. Cleanup of all spills inside the secondary containment areas must begin immediately upon discovery and be completed within 24 hours. Secondary containment must be inspected immediately after cleanup for cracks, gaps or other defects (failure of the coating) which would allow waste to migrate to the underlying soil. If any deterioration is discovered, the permittee shall immediately remove all waste from the deteriorated area. All cleanup operations shall be documented in the facility's operating record.

- 3. The Permittee(s) shall remove any precipitation which accumulates in the secondary containment system within 24 hours of the time such accumulation is discovered, or before the area overflows, whichever comes first.
- 4. All hazardous and nonhazardous special wastes stored or generated by this facility which require further treatment or disposal off-site must be transported to the receiving facility in accordance with the applicable regulations in 35 Ill. Adm. Code Parts 709, 702, 723, 307 and 309, and the Illinois EPA's Manifest System.
- 5. Shipments of containers from off-site that are held in a truck for more than ten (10) days must be stored in accordance with the conditions of this permit (eg. they must meet the same aisle space and compatibility requirements as the other container storage units). Trucks loaded within ten days are only subject to the requirements of condition I.J.9 below when containers of waste are present in the truck.
- 6. The arrangement of the containers in a truck that is in storage at the site must meet the aisle space requirements of 35 IAC 724.135 and those specified in Sections I.E.3 and I.E.7 of this permit.
- 7. Lab packs shall not be opened, repackaged, poured-off or consolidated in the storage bays or staging areas except as specified below.

The consolidation of lab packs can only occur under operating fume hoods in the following areas:

the three fume hoods along the west wall in Building 25,

the fume hood in the northeast corner of Building 26,

the four fume hoods in the Lab Pack Repack and Consolidation Area in Unit U,

the fume hood in the staging area in Unit G1, and

the fume hoods in the staging area in Unit R1.

The pouring-off of the containers that were in a lab pack can only occur under operating fume hoods in the following areas:

the fume hood in the drum pumping enclosure along the north wall in Building 26,

the fume hood at the Lab Pack Pour-Off Station in Unit F1, and

the four fume hoods in Building #25.

- 8. Wastes which are considered incompatible under US Department of Transportation (DOT) segregation requirements at 49 CFR Parts 171 179 shall not be managed in a container unloading dock at the same time.
- 9. a. Containers that are held in a truck for less than 10 days in area that has a common secondary containment system or drains to a single sump shall meet the DOT segregation and compatibility requirements at 49 CFR Parts 171 179. This condition applies to both the containers of wastes on a truck from either on-site or off-site as well as the area in which the trucks are parked.
 - b. Containers that are held in a truck for greater than 10 days in area that has a common secondary containment system or drains to a single sump must be stored pursuant to Condition J.5 and shall meet the compatibility requirements of Condition A.4 in Section VIII. This condition applies to both the containers of wastes on a truck from either on-site or off-site as well as the area in which the trucks are parked.
 - c. Vehicles (e.g., tank trucks or roll-of boxes) of bulk liquid, solid or sludge wastes that are parked in area that has a common secondary containment system or drains to a single sump shall meet the compatibility requirements of Condition A.4 in Section VIII, regardless of whether they are in storage as defined in Condition J.5 above.
- 10. The permittee shall inspect the containers from the Pegasus System according to the following schedule to insure that containers are RCRA empty before they are crushed. The permittee shall not crush containers that are not RCRA empty.

The inspections shall be performed prior to the containers being crushed. If the Pegasus System fails an inspection, the permittee shall not crush containers in the Pegasus System until the source of the problem(s) is investigated and the problem(s) resolved.

Inspection Schedule for containers to be crushed in the Pegasus System:

<u>Phase 1.</u> Visually inspect 10 drums in a row, once per operating day, for four (4) consecutive weeks. If successful without exception (i.e., all drums are "RCRA empty" and/or all "non-RCRA empty" drums are automatically rejected by the system), the permittee shall follow the procedures in Phase 2. If unsuccessful, the permittee shall continue to follow the procedures in Phase 1 until successful.

<u>Phase 2</u>. Visually inspect 10 drums in a row, once per week, for four (4) consecutive weeks. If successful without exception (i.e., all drums are "RCRA empty" and/or all "non-RCRA empty" drums are automatically rejected by the system), the permittee shall use the procedures in Phase 3. If unsuccessful, the permittee shall use the procedures in Phase 1.

<u>Phase 3</u>. Visually inspect 10 drums in a row, once per week, for two (2) consecutive weeks. If successful without exception (i.e., all drums are "RCRA empty" and/or all "non-RCRA empty" drums are automatically rejected by the system), the permittee shall use the procedures in Phase 4. If unsuccessful, the permittee shall use the procedures in Phase 2.

<u>Phase 4</u>. Visually inspect 10 drums in a row, once per month. If successful without exception (i.e., all drums are "RCRA empty" and/or all "non-RCRA empty" drums are automatically rejected by the system), continue with monthly inspection schedule. If unsuccessful, the permittee shall use the procedures in Phase 3.

- 11. Hazardous waste transfer facility activities are limited to the areas identified on CHSI Drawing 4254, Revision A. The use of other areas as discussed in Note No. 4 on the drawing is limited to in-transit RCRA hazardous wastes only (eg. the transportation of wastes to a facility other than the Clean Harbors Svcs Inc facility). In-transit activities involving non-RCRA wastes is not permitted unless the permittee requests and is issued a solid waste transfer facility permit pursuant to 35 IAC 807 requirements.
- 12. The mobile waste compactor shall only be used in the staging area of unit R1.
- 13. The permittee may only treat Fuming Acids under the operating fume hood in the Outdoor Staging Area (Unit R1).
- 14. The treatment of cyanide wastes in containers shall only be conducted under the operating fume hood in the Outdoor Storage Area (Unit R1). The exhaust from the fume hood shall be bubbled through a 55 gallon drum containing a caustic solution as outlined in the approved permit application. Treatment of cyanide wastes in tank trucks shall be in accordance with the approved application as outlined on page D-15.
- 15. The treatment of peroxides in containers shall only be conducted under the operating fume hood in the Unit G1 or Unit F1. The exhaust from the fume hood shall be fed through a carbon absorption unit.
- 16. Phase separation of two or more liquid layers, as outlined in the application, is not permitted as a container management activity. The contents of a container may be pumped into the tank system for phase separation.

- 17. Stabilization of wastes in containers (e.g., a roll-off box) may be conducted in Process Building No. 3 (Unit Z). This is the only area currently permitted for this activity.
- 18. The permittee is prohibited from rinsing Non-bulk containers (e.g., drums) that contained acutely toxic wastes (P-codes).
- 19. The removal of residues from non RCRA-empty tank trucks shall only occur in the following transporter storage/staging units as identified in Section I.B.1 of this permit: Q, V, X, C, 59, 15, 62, and W. The removal of residues from trucks during off-loading into the RCRA-exempt Clean Water Act waste water treatment system in Units J1 and J2 are not subject to this condition.
- 20. The placement of dry ice into roll-off/intermodel containers of wastes to lower temperatures (to prevent spontaneous combustion) shall be conducted in Units B and Q1 in accordance with Appendix D 61 of the approved renewal application subject to the following modifications:
 - a. The requirement to add dry ice to containers applies only to those containers with waste identified by the permittee as FB5. That is, those solids that contain at least 5000 BTUs/lb but are not processable in the existing fuel blending system because they are either non-dispensable monolithic solids or contain non-processable debris. The dry ice must be added when:
 - 1. The expected high daytime temperature is at or above 90 degree Fahrenheit;
 - 2. The expected low nighttime temperature is at or above 70 degrees Fahrenheit; and
 - 3. The expected high dew point is at or above 70 degrees Fahrenheit.
 - b. When dry ice is required by 20(a) above, the permittee shall visually inspect containers daily to ensure that there is at least 25 lbs. of dry ice present.
 - c. The permittee shall monitor the temperature inside the containers required by 20(a) above to contain dry ice. If the temperature is above 150 degrees Fahrenheit within the container, additional dry ice shall be added to reduce the temperature below this level even if 25 lbs. or dry ice is present in the container.
- 21. The wetting of black powder in containers to prevent explosions prior to transportation may be conducted in area R1 only, and shall comply with the procedures in Appendix D 62 of the approved renewal permit application as modified below:

- a. The permittee shall wet all black powder received at this facility with an amount of water equal to 20% by weight of the black powder.
- b. Where black powder is being treated as described above, a polyethylene cover must be placed under the container to collect spillage.
- c. The cover shall be decontaminated after treatment is complete and disposed of as special waste.
- d. The permittee is allowed to add virgin ethylene glycol based antifreeze to the water used to wet the black powder when outdoor temperatures are expected to go below 32 degrees Fahrenheit.
- 22. All containers managed in the designated bulk solids storage areas (e.g., Unit Q1 and Unit Z1) shall be tested for the presence of free liquids using EPA Method 9095 (Paint Filter Liquids Test) as described in Test Methods for Evaluating Solid Wastes, Physical/Chemical Methods (SW-846). No wastes containing free liquids shall be stored in these areas.

K. General Construction Requirements

- 1. The Permittee(s) is authorized to construct the proposed Container Management Units identified in Sections I.B.1.d., I.B.1,e. and I.B.1.f. of this permit. The container storage areas may only be constructed in accordance with the approved Permit Application, subject to the following modifications:
 - a. Within thirty days after completing construction and prior to any container of waste being placed or stored in the container storage areas, the Permittee(s) shall submit to the Illinois EPA a Construction Certification Report from a qualified, registered professional engineer, demonstrating that the container storage area meets the requirements of 35 Ill. Adm. Code 724.275(b). This report shall contain the information required in Attachment C to this permit and a statement that the base slab is free of cracks or gaps.
 - b. The Permittee(s) may not store wastes in these areas until the Construction Certification Report is approved.

L. Closure

At closure, all waste and waste residues must be removed from the containment system. Remaining containers, liners, bases, and soil containing or contaminated with waste or waste

residue must be decontaminated or removed. Closure of the container storage areas shall be carried out in accordance with the closure plan in the approved renewal Permit Application, as modified below:

- 1. The Permittee(s) shall notify the Illinois EPA's Bureau of Land in writing of its intent to close the container storage areas at least 45 days prior to the date closure is expected to begin. Along with this notification, the Permittee(s) shall submit the sampling and analysis plan to be used in demonstrating a storage area has been properly decontaminated. Closure shall not begin without written approval from the Illinois EPA's Bureau of Land. Illinois EPA review of this plan will be subject to the permit appeal provisions contained in Section 39(a) and Section 40(a) of the Act. The response from the Illinois EPA shall approve and establish:
 - a. The sampling plan;
 - b. What contaminants must be analyzed for; and
 - c. The level at which decontamination is considered complete.
- 2. The concrete surfaces shall be visually inspected, photographed and any residue adhering to the surface must be removed by scraping and/or brushing. Following this, the concrete surfaces must be steam cleaned and triple rinsed. All wash and rinse water shall be collected and managed as a hazardous waste, unless the Permittee(s) can document that the waste is not hazardous as defined in 35 Ill. Adm. Code 721.103. An independent, registered, professional engineer must certify that the surface has no cracks, gaps or other defects which would allow waste to migrate through to the underlying soil. Otherwise, sampling in accordance with an approved sampling plan, shall be conducted to verify the underlying soil is uncontaminated.
- 3. Sweepings, washwaters and rinsates collected during closure of the container storage area shall be managed as a hazardous waste, unless the Permittee(s) can document that the waste is not hazardous as defined in 35 Ill. Adm. Code 721.103.
- 4. The Permittee(s) shall provide post-closure care in accordance with 35 Ill. Adm. Code Part 724, Subpart G for the container storage areas in the event all of the hazardous wastes or contaminated soils cannot be practicably removed or decontaminated in accordance with the approved closure plan identified in Condition I(L)(1). If it is determined that the closure requirements cannot be met and post-closure care is required, this Permit must be modified to require post-closure care for the container storage areas, in accordance with 35 Ill. Adm. Code Subtitle G, Part 724, Subparts G and H.

- 5. Should post-closure care, as described in Condition I(L)(4) above, become necessary, the Permittee(s) shall submit an application for modification to this permit, including an amended closure and post-closure care plan for this unit. The application must be submitted within thirty (30) days following discovery that clean closure cannot be accomplished. If a determination is made to not pursue clean closure prior to the implementation of the closure plan for the container storage area, the modification request shall be made no later than sixty (60) days after the determination is made.
- 6. Financial assurance for closure and post-closure of the container storage areas, if required in accordance with Condition I(L)(4) and I(L)(5) above, shall be provided within thirty (30) days following modification of the permit.
- 7. Within sixty (60) days after closure of the container storage areas has been completed, the Permittee(s) shall submit certification to the Illinois EPA that the unit has been closed in accordance with the approved closure plan. The closure certification form in Attachment E to this permit or a certification with identical wording must be used. Signatures must meet the requirements of 35 Ill. Adm. Code Section 702.126. The independent engineer (registered in the State of Illinois) should be present at all critical, major points (activities) during the closure. These might include soil sampling, soil removal, backfilling, final cover placement, etc. The frequency of inspections by the independent engineer must be sufficient to determine the adequacy of each critical activity. Financial assurance must be maintained for the area(s) until the Illinois EPA approves the closure certification for the unit. The Illinois EPA's review of closure certification for partial or final closure will be conducted in accordance with 35 Ill. Adm. Code 724.243.

A Closure Documentation Report must be submitted with the closure certification which includes the following items, if applicable:

- a. The volume of waste and waste residue removed, including wastes resulting from decontamination activities;
- b. A description of the method of waste handling and transport;
- c. Copies of the waste manifests;
- d. A description of the sampling and analytical methods used including sample preservation methods and chain-of-custody information;
- e. A chronological summary of closure activities and the cost involved;
- f. Tests performed, methods and results;

- g. Color photographs of closure activities which document conditions before, during and after closure; and
- h. A scale drawing of all excavated or decontaminated areas and sample locations.
- 8. To avoid creating another regulated storage unit during closure, it is recommended that you obtain any necessary permits for waste disposal prior to initiating excavation activities. If it is necessary to store excavated hazardous waste on-site prior to off-site disposal, do so only in containers or tanks for less than ninety (90) days. Do not create regulated waste pile units by storing the excavated hazardous waste in piles. The permit exemption (35 III. Adm. Code 722.134) only applies to containers and tanks.
- 9. Under the provisions of 29 CFR 1910 (51 FR 15,654, December 19, 1986), cleanup operations must meet the applicable requirements of OSHA's Hazardous Waste Operations and Emergency Response standard. These requirements include hazard communication, medical surveillance, health and safety programs, air monitoring, decontamination and training. General site workers engaged in activities that expose or potentially expose them to hazardous substances must receive a minimum of 40 hours of safety and health training off site plus a minimum of three days of actual field experience under the direct supervision of a trained experienced supervisor. Managers and supervisors at the cleanup site must have at least an additional eight hours of specialized training on managing hazardous waste operations.
- 10. If the Illinois EPA determines that implementation of this closure plan fails to satisfy the requirements of 35 Ill. Adm. Code, Section 724.211, the Illinois EPA reserves the right to amend the closure plan. Revisions of closure plans are subject to the appeal provisions of Section 40 of the Act.
- 11. The Permittee shall analyze all samples individually (i.e., no compositing). Sampling and analytical procedures shall be conducted in accordance with the latest edition of SW-846 and Attachment G to the Illinois EPA's closure plan instruction package. Sample size per interval shall be minimized to prevent dilution of any contamination. Apparent visually contaminated material within a sampling interval shall be included in the sample portion of the interval to be analyzed. To demonstrate a parameter is not present in a sample, analysis results must show a detection limit at least as low as the PQL for that parameter as identified in the latest edition of SW-846.

SFN:WRW:bjh\051161s.doc

SECTION II: TANK SYSTEMS

A. Summary

The tanks at the Clean Harbors Svcs Inc facility are used for a variety of purposes, including wastewater treatment units (pursuant to 35 Ill. Adm. Code 310), and hazardous waste storage and treatment units (pursuant to 35 Ill. Adm. Code 724). Of these uses, the storage and treatment of hazardous waste are the only uses that are regulated under RCRA. Associated with these activities are twenty seven proposed above-ground tanks. All above-ground tanks will have secondary containment consisting of a concrete vault and an impermeable membrane or coating which has been applied to the concrete.

B. Waste Identification

- 1. The Permittee(s) may store a total volume (in gallons) of waste in the tanks listed below subject to the terms of this permit.
 - i. Listed Waste Storage Tanks (Unit Y) Proposed

Tank Numbers	No. of <u>Units</u>	<u>Description</u>	Maximum Capacity <u>In Gallons</u>	Minimum Shell Thickness of Tank (inches)	Material of Construction
121	(6)	Storage Tanks	11025	3/16	Carbon Steel
155	(2)	Storage Tanks	11025	3/16	Carbon Steel

ii. Listed Waste Treatment Tanks (Unit Z) Proposed

Tank Numbers	No. of <u>Units</u>	Description	Maximum Capacity In Gallons	Minimum Shell Thickness of Tank (inches)	Material of Construction
123	(1)	Reactor vessel	13,570	1/4	FRP
137	(1)	Lamella clarifier	1,200	1/4	Carbon Steel
138	(1)	Clarifier Waste Collection Tank	4,100	3/16	Carbon Steel

0316000051
Clean Harbors Svcs Inc
RCRA Log No. B-16R-M-6

142	(1)	Sludge Conditioning Tank	1,270	3/16	Carbon Steel
149	(2)	Sand Filter	750	3/32	Carbon Steel
150	(1)	Backwash Collection Tank	3,770	3/16	Carbon Steel
152	(2)	Carbon Adsorption Unit	1,300	3/16	Carbon Steel
153	(1)	Treated Effluent Tank	2,640	3/16	Carbon Steel

iii. Hazardous Waste Fuel Blending Operation (Unit 43) Existing

Tank <u>Numbers</u>	No. of <u>Units</u>	<u>Description</u>	Maximum Capacity In Gallons	Minimum Shell Thickness of Tank (inches)	Material of Construction
161-21	(1).	Dispersion Tank	1,225	3/16	Carbon Steel
161-22	(1)	Overflow Tank	275	3/16	Carbon Steel

iv. Flammable Storage Tank Farm (Unit 16) Existing

Tank Numbers	No. of <u>Units</u>	<u>Description</u>	Maximum Capacity <u>In Gallons</u>	Minimum Shel Thickness of Tank (inches)	Material of Construction
158	(5)	Tanks TK-103, TK-104, TK-105, TK-106, TK-108. Hazardous Waste Fuel Storage Tanks	12,800	0.167	Carbon Steel
159	(1)	Tank TK-112. Neutral pH waters, lean waters and/or hazardous waste fuel storage tank.	19,600	0.167	Carbon Steel

177	(2)	Tanks TK-101 and TK-107. Mild acidic waters, lean waters, and/or hazardous waste fuel storage tanks.	12,800	.0.158	Stainless Steel
180	(1)	Tank TK-102. Hazardous Waste Fuel and PCB Storage Tank.	12,800	0.167	Carbon Steel
183	(1)	Tank TK-110. Hazardous Waste Fuel and PCB Storage Tank.	12,800	0.167	Carbon Steel

v. Flammable Storage Tank Farm (Unit 22) Proposed

Tank <u>Numbers</u>	No. of <u>Units</u>	Description	Maximum Capacity In Gallons	Minimum Shell Thickness of Tank (inches)	Material of Construction
414	(1)	Hydropulpar	3490	0.05	carbon steel
415, 416	$^{-}(2)$	Blended Liquid Storage Tank	10,558	0.105	carbon steel
417	(1)	Diluent Feed Tank	15,547	0.167	carbon steel
418	(1)	Metalwash Solvent Storage Tank	6,136	0.054	carbon steel
424	(1)	Metal Wash Tank	3730	0.5	carbon steel
427	(1)	Rinse Tank	987	0.5	carbon steel

- 2. The Permittee(s) may store the wastes identified in Attachment A to this permit in the tanks specified above and any nonhazardous waste. All nonhazardous waste must be evaluated through the waste analysis plan for compatibility.
- 3. Storage of hazardous waste in tanks other than those specifically identified in II(B)(1) is prohibited.

C. Containment and Detection of Releases

- 1. The Permittee(s) shall provide secondary containment which meets the requirements of 35 Ill. Adm. Code 724.293 (as amended 7/16/87) for each tank identified above.
- 2. The Permittee(s) shall construct, operate, and maintain the tank system according to the detailed plans and reports contained in the approved permit application.

- 3. The Permittee shall perform a complete inspection of each secondary containment coating system yearly and perform annual maintenance to insure the integrity of the coating. It shall not be an act of non-compliance if the coating has been installed properly but does not live up to the manufacturer's printed performance standards and fails due to excessive wear or chemical breakdown. The Permittee(s) shall notify the Illinois EPA within thirty days of becoming aware of the failure. The Permittee(s) shall reapply a different coating specified in the approved permit application or submit a modification of its permit to install a new coating within 180 days of the failure of the coating. The Permittee shall document the date of the surface coating inspection and any maintenance of the surface coating. These inspections must be performed no later than August 31, of each year.
- 4. The Permittee(s) shall inspect all secondary containment sumps daily and remove all liquids contained in the sumps within 24 hours.

D. General Construction Requirements

- 1. The Permittee(s) are authorized to construct the listed waste storage tanks (Unit Y), the listed waste treatment tanks (Unit Z), and the flammable storage tank farm (Unit 22) as identified in Condition II(B)(1). Each unit includes all tanks, ancillary equipment and secondary containment. These tank farms may only be constructed in accordance with the approved permit application, subject to the following modifications:
 - a. Within thirty days after completing construction and prior to any waste being placed or stored in a tank or its corresponding ancillary equipment, the Permittee(s) shall submit to the Illinois EPA's Bureau of Land, a Construction Certification Report from an independent qualified, registered professional engineer. The certification must demonstrate that the tank system meets the requirements of 35 Ill. Adm. Codes 724.292 and 724.293. The certification shall contain the information described in Attachment C and the additional information listed below:
 - i. Documentation that the new tank systems were inspected for the presence of the following items:
 - a) weld breaks;
 - b) punctures;

- c) scrapes of the protective coatings on the tank or secondary containment system;
- d) cracks;
- e) corrosion;
- f) other structural damage or inadequate construction/installation; and
- g) cracks or gaps in the base slab.

All defects noted during this inspection must be remedied prior to covering, enclosing or placing the tank system in use.

- ii. A copy of the leak test performed on all of the new tanks and ancillary equipment, including a description of any repairs performed on the system to remedy the leak(s).
- iii. Certification that the tanks and ancillary equipment were designed and installed in a manner that is supported and protected against physical damage and excessive stress due to settlement, vibration, expansion or contraction.
- b. All tanks, pumps, piping, hoses, and manifolds used for PCBs wastes regulated under TSCA shall be physically separate from those tanks which only handle RCRA regulated wastes.
- c. The Permittee(s) shall not store wastes in these areas until the Construction Certification Report is approved. The Agency shall review the Report described above to ensure the tank systems and their secondary containment meets the requirements of 35 Ill. Adm. Codes 724.292 and 724.293.

E. General Operating Requirements

- 1. The Permittee(s) shall not place hazardous wastes in a tank system if they could cause the tank, its ancillary equipment, or the containment system to rupture, leak, corrode, or otherwise fail.
- 2. The Permittee(s) shall use appropriate controls and practices to prevent spills and overflows from tank or containment systems using the methods specified in the Approved Permit Application.

- 3. In the event of a leak or a spill in the tank system, the Permittee(s) shall comply with the practices and procedures described in the approved permit application and notify the Agency's Bureau of Land in according with Condition $\Pi(I)(1)$. All reported leaks or spills must be recorded in the Facility's Operating Record.
- 4. All hazardous wastes to be received at the tank storage area must be identified in Attachment A to this permit and have been analyzed per all applicable regulations and the requirements identified in the waste analysis plan. In addition, all hazardous and nonhazardous special wastes received at the facility must be accompanied by a properly completed Illinois manifest.
- 5. An employee of the facility shall be present and observe the transfer operation at all times when waste is being transferred between containers, tank trucks, rail cars and tanks.
- 6. Precipitation accumulating within the tank farm shall be removed within 24 hours after the precipitation event has ended.
- 7. Incoming waste, not subject to 35 Ill. Adm. Code 723.112 (e.g., CHSI at Chicago is the designated facility) must be placed in a permitted storage unit within 24 hours upon receipt of the waste.

F. Tank System Certification

- 1. The Permittee(s) shall obtain and keep on file at the facility written statements by those persons required to certify the design of the tank system and supervise the installation of the tank system as required by 35 Ill. Adm. Code 724.292(g).
- 2. The Permittee(s) shall obtain and keep on file at the facility a written assessment of the new tank system's integrity (35 Ill. Adm. Code 724.292(a)). The assessment shall be certified by an independent, qualified Illinois registered professional engineer.

G. Response to Leaks or Spills

In the event of a leak or a spill from a tank system, from a secondary containment system, or if a system becomes unfit (i.e., failure of the coating) for continued use, the Permittee(s) shall remove the system from service immediately and complete the following actions: (35 Ill. Adm. Code 724.296(a)-(f)).

- 1. Stop the flow of hazardous waste into the system and inspect the system to determine the cause of the release.
- 2. Remove all waste as necessary from the system within 24 hours of the detection of the leak to prevent further release and to allow inspection and repair of the system. If the Permittee(s) finds that it will be impossible to meet this time period, the Permittee(s) shall notify the Agency and demonstrate that the longer time period is required.
 - If the collected material is a RCRA hazardous waste, it must be managed in accordance with all applicable requirements of 35 Ill. Adm. Code Parts 722-724.
- 3. Contain visible releases to the environment. The Permittee(s) shall immediately conduct a visual inspection of all releases to the environment and based on that inspection: (1) prevent further migration of the leak of spill to soils or surface water and (2) remove and properly dispose of any visible contamination of the soil or surface water.
- 4. Close the system in accordance with the Closure Plan, contained in the approved Permit Application, unless the following actions are taken:
 - a. For a release caused by a spill that has not damaged the integrity of the system, the Permittee(s) shall remove the released waste and make any necessary repairs to fully restore the integrity of the system before returning the tank system to the service.
 - b. For a release caused by a leak from the primary tank system to the secondary containment system, the Permittee(s) shall repair the primary system prior to returning it to service.

H. Inspections

- 1. The permittee shall inspect the tank systems in accordance with the inspection schedule in Attachment B to this Permit and Section F of the approved permit.
- 2. If a leak or spill is observed during the daily inspections, the Permittee(s) shall immediately remove the tank system in question from service and follow the procedures set forth in 35 Ill. Adm. Code 724.296.
- 3. Precipitation accumulating in the sumps of the secondary containment system at the loading dock shall be removed within 24 hours after the precipitation event has ended.

- 4. Releases of hazardous waste from spills and leaks which are observed in the secondary containment system shall also be removed within 24 hours and managed as a hazardous waste.
- 5. The bulk liquid unloading area shall be inspected in the following manner:
 - a. The area shall be inspected for the presence of spills and releases after each truck has been unloaded. If observed, such releases shall be cleaned up immediately.
 - b. Documentation of these inspections and any corrective actions taken shall be included in the operating record for the facility.
- 6. The Permittee(s) shall inspect each tank system to assess its condition. This inspection shall consist of a visual inspection, a pressure test and an ultrasonic thickness test in accordance with the following procedures:
 - a. An ultrasonic thickness test of the tops, bottoms and sidewalls of the tank in accordance with the procedures in Appendix F-9 of the application shall be conducted annually on each tank. The ultrasound tests shall be conducted from the inside of the tank at least every fifth year concurrent with the internal inspection required in Condition H.6.c below. Corrective action as specified by the manufacturer of these tanks shall be taken if the test indicates that the materials of construction of a tank system have been detrimentally affected by the hazardous wastes which have been stored in it.
 - b. A hydrostatic leak test or other integrity assessment as approved by the Agency shall be conducted annually on the tank ancillary equipment. Corrective action as specified by the manufacturer of the ancillary equipment shall be taken if the test indicates that the ancillary equipment has been detrimentally affected by the hazardous wastes which have been in it.
 - c. A detailed visual inspection of the tank's interior shall be conducted at least every fifth year to ensure the tank's integrity. During this internal inspection, the internal surface shall be inspected for rust, cracks and thin areas. Corrective action as specified by a qualified registered professional engineer or corrosion technician shall be taken if the internal inspection indicates that the interior surface of a tank system has been detrimentally affected by the hazardous waste stored in it.
 - d. If the testing conducted as required by Conditions II(H)(6)(a) or (c) above indicates the present rate of corrosion may cause reduction of the shell thickness

below the permitted minimum shell thickness within 5 years, internal inspections shall be conducted annually and corrosion monitoring coupons must be installed in the area where the most severe corrosion is occurring. The coupons shall be monitored every 60 days. If the coupon indicates the tank will fail in less than one year, the permittee shall verify the remaining shell thickness through ultrasonic testing or remove the tank from service. The tank shall be removed from service and repaired or replaced when the tank no longer meets the minimum shell thickness requirements specified in Condition II.B.

- e. For all FRP Tanks; a detailed visual inspection of the tank's interior shall be conducted on an annual basis to ensure the tank's integrity. During this internal inspection, the interior surface shall be inspected for softening, indentations, cracks, exposed fibers, aging, checking, lack of surface resins, delamination, translucency/discoloration, air bubbles and thin areas.
- f. Tanks shall be entered in accordance with 29 CFR 1910.94(d)(11). The first internal inspection shall be conducted within five years after a proposed tank becomes operational.
- g. The inspection of each tank shall be certified by a qualified, registered professional engineer, or corrosion technician.
- h. All waste and washwater generated during evacuation of the tanks shall be managed as a hazardous waste, unless the Permittee(s) can document that the waste is not hazardous as defined in 35 Ill. Adm. Code 721.103.
- i. Results of the tests and inspections shall be submitted to the Bureau of Land of this Agency within 60 days of the testing or inspection date, and shall also be included in the operating record of this facility.
- j. If the results of these tests or inspections indicate a tank system is leaking, or unfit for use, the procedures set forth in 35 Ill. Adm. Code 724.296 (as amended July 16, 1987) shall be followed.

I. Reporting and Recordkeeping

1. The Permittee(s) shall report to the Agency's Bureau of Land Field Office within twenty-four (24) hours when a leak or spill occurs in the tank system or secondary containment system unless the spill or leak of hazardous waste is less than or equal to one pound in quantity and it is immediately contained and cleaned up.

- 2. Within thirty (30) days of detecting a release as described above to the environment from the tank system or secondary containment system, the Permittee(s) shall report the following information in writing to the Bureau of Land of this Agency:
 - a. Likely route of migration of the release.
 - b. Characteristics of surrounding soil (including soil composition, geology, hydrogeology, and climate).
 - c. Results of any monitoring or sampling conducted in connection with the release.
 - d. Proximity to downgradient drinking water, surface water, and populated areas.
 - e. Description of response actions taken or planned.
- 3. The Permittee(s) shall submit to the Agency all certifications of major repairs to correct leaks within seven days from returning the tank system to use (35 Ill. Adm. Code 724.296(f)).

J. Special Requirements for Ignitable or Reactive Wastes

- 1. The Permittee(s) shall not place ignitable waste in a tank system, unless the procedures specified in the Approved Permit Application are followed.
- 2. The Permittee(s) shall comply with the requirements for the maintenance of protective distances between the waste management area and any public ways, streets, alleys, or an adjoining property line that can be built upon as required in Tables 2-1 through 2-6 of the National Fire Protection Association's "Flammable and Combustible Liquids Code" (1990).
- 3. "No Smoking" signs must be conspicuously placed wherever there is a hazard from ignitable waste.

K. Special Requirements For Incompatible Wastes

1. The Permittee(s) shall not place incompatible wastes together in the same tank system. The facility shall not store waste in a tank which previously held an incompatible waste, unless the tank system has been decontaminated. Incompatible wastes are identified in Section VIII of this Permit.

L. Closure

At closure, all waste and waste residues must be removed from tanks, discharge control equipment and containment structures. Closure of the tank storage area shall be carried out in accordance with the closure plan in the approved permit application, as modified below:

- 1. The Permittee(s) shall notify the Agency's Bureau of Land in writing of its intent to close the tank system at least 45 days prior to the date closure is expected to begin. Along with this notification, the Permittee(s) shall submit the sampling and analysis plan to be used in demonstrating a tank system has been properly decontaminated. The plan shall be approved by the Agency's Bureau of Land in writing prior to being implemented. Agency review of this plan will be subject to the permit appeal provisions contained in Section 39(a) and Section 40(a) of the Act. The response from the Agency shall approve and establish:
 - a. The sampling plan;
 - b. What contaminants must be analyzed for; and
 - c. The level at which decontamination is considered complete.
- 2. The concrete surfaces shall be visually inspected, photographed and any residue adhering to the surface must be removed by scraping and/or brushing. Following this, the concrete surfaces must be steam cleaned and triple rinsed. All wash and rinse water shall be collected. For tank systems which include secondary containment systems which met the requirements of 35 Ill. Adm. Code 724.293 at the time of installation, the secondary containment must be certified by an independent, registered, professional engineer indicating that the surface has no cracks, gaps or other defects which would allow waste to migrate through to the underlying soil. If such a certification cannot be made, soil sampling and analysis must be conducted to establish clean closure.

Sweepings collected during closure of any tank system shall be managed as a hazardous waste. All washwater and rinsate generated during the closure of these units shall also be managed as a hazardous waste.

3. The Permittee(s) shall provide post-closure care in accordance with 35 Ill. Adm. Code Part 724 for a tank system if all of the hazardous wastes or contaminated soils cannot be practicably removed or decontaminated in accordance with the closure requirements outlined in this permit and in the approved closure plan. If it is determined that the closure requirements cannot be met and post-closure care is required, the tank system

shall be considered to be a landfill and the post-closure care plan in the approved application will be modified as required to provide adequate post-closure care for the affected tank system(s) in accordance with 35 Ill. Adm. Code, Subtitle G, Part 724, Subparts G and H.

- 4. Should post-closure care, as described in Condition 3 above, become necessary, the Permittee(s) shall submit an application for modification to this permit, including an amended closure plan and post-closure care plan for the affected tank system within thirty (30) days following discovery that clean closure cannot be accomplished. If a determination is made not to pursue clean closure prior to the implementation of the closure plan for the tank system, the modification request shall be made no later than sixty (60) days after the determination is made.
- 5. Financial assurance for closure and post-closure of any tank system being closed as a landfill, when required in accordance with Conditions 3 and 4 above, shall be updated within thirty (30) days following modification of the permit under the provisions of Condition 4 above.
- 6. Within sixty (60) days after closure of any tank system is complete, the Permittee(s) shall submit certification to the Agency that the unit has been closed in accordance with the approved closure plan.

The closure certification form in Attachment E to this permit or a certification with identical wording must be used. Signatures must meet the requirements of 35 Ill. Adm. Code Section 702.126. The independent engineer should be present at all critical, major points (activities) during the closure. This might include soil sampling, soil removal, backfilling, final cover placement, etc. The frequency of inspections by the independent engineer must be sufficient to determine the adequacy of each critical activity. Financial assurance must be maintained for each tank system identified in Condition B.1 above. Documents regarding financial assurance for closure of this facility may be modified after the Agency approves the closure certification for any or all of the tank systems. The Agency's review of closure certifications for partial or final closure will be reviewed in accordance with 35 Ill. Adm. Code 724.243.

A Closure Documentation Report must be submitted with the closure certification which includes the following items, if applicable:

- a. The volume of waste and waste residue removed, including wastes generated during decontamination procedures.
- b. A description of the method of waste handling and transport.

- c. Copies of the waste manifests.
- d. A description of the sampling and analytical methods used.
- e. A chronological summary of closure activities and the cost involved.
- f. Tests performed, methods and results.
- g. Color photographs of closure activities which document conditions before, during and after closure.
- h. A scale drawing of all excavated or decontaminated areas and sample locations.
- 7. To avoid creating another regulated storage unit during closure, it is recommended that you obtain any necessary permits for waste disposal prior to initiating excavation activities. If it is necessary to store excavated hazardous waste on-site prior to off-site disposal, do so only in containers or tanks for less than ninety (90) days. The permit exemption (35 Ill. Adm. 722.134) only applies to containers and tanks.
- 8. Under the provisions of 29 CFR 1910 (51 FR 15,654, December 19, 1986), cleanup operations must meet the applicable requirements of OSHA's Hazardous Waste Operations and Emergency Response standard. These requirements include hazard communication, medical surveillance, health and safety programs, air monitoring, decontamination and training. General site workers engaged in activities that expose or potentially expose them to hazardous substances must receive a minimum of 40 hours of safety and health training off site plus a minimum of three days of actual field experience under the direct supervision of a trained experienced supervisor. Managers and supervisors at the cleanup site must have at least an additional eight hours of specialized training on managing hazardous waste operations.
- 9. If the Agency determines that implementation of this closure plan fails to satisfy the requirements of 35 Ill. Adm. Code 724.211, the Agency reserves the right to amend the closure plan. Revisions of closure plans are subject to the appeal provisions of Section 40 of the Act.
- 10. The Permittee shall analyze all samples individually (i.e., no compositing). Sampling and analytical procedures shall be conducted in accordance with the latest edition of SW-846 and Attachment G to the Illinois EPA's closure plan instruction package. Sample size per interval shall be minimized to prevent dilution of any contamination. Apparent visually contaminated material within a sampling interval shall be included in the same portion of the interval to be analyzed. To demonstrate a parameter is not

present in a sample, analysis results must show a detection limit at least as low as the PQL for that parameter as identified in the latest edition of SW-846.

SFN:WRW:bjh\051161s.doc

SECTION III: GROUNDWATER COMPLIANCE MONITORING PROGRAM

A. SUMMARY

Hazardous waste constituents have been detected in groundwater monitoring wells at the Clean Harbors Svcs Inc (CHSI) facility in the vicinity of the surface impoundments above the groundwater protection standard and background values. Therefore, a compliance monitoring program meeting the requirements of 35 Ill. Adm. Code 724.199 must be implemented at the CHSI facility. The compliance monitoring program currently consists of five (5) downgradient monitoring wells and four (4) upgradient monitoring wells. Groundwater in the vicinity of the unit has been determined to be 35 Ill. Adm. Code 620.220, Class II General Resource Groundwater.

B. DEFINITIONS

As used herein, the words or phrases set forth below shall have the following definitions:

- 1. "Uppermost Aquifer" refers to the geologic formation nearest the natural ground surface that is an aquifer, as well as lower aquifers that are hydraulically connected with this aquifer in the vicinity of the facility. The uppermost aquifer in the vicinity of the CHSI facility has been identified as a heterogeneous mixture of fill materials composed of cement fragments, masonry, rubble, wood and metal scraps, slag, sludge, cinders and clay. The fill material varies in thickness from approximately seven (7) to eighteen (18) feet. The fill is underlain and hydraulically connected to peat and organic silt of the Holocene Grayslake Peat.
- 2. "Point of Compliance" refers to the vertical surface located at the hydraulically down-gradient limits of the waste management area (the closed surface impoundments) extending down into the uppermost aquifer underlying the regulated units.
- 3. "Ft bgs" refers to the number of feet below the ground surface.
- 4. "Ft-MSL" refers to the number of feet below the ground surface referenced to mean sea level.
- 5. "Detected" shall mean a concentration equal to or above the PQL listed in USEPA's SW-846 (Third Edition) for the applicable analytical methods specified in the approved Sampling and Analysis Procedures, which are incorporated by reference in Condition III.H of the Permit.

- 6. "Progressive Increase" shall mean an increase in the concentration of a constituent in successive sampling events.
- 7. "Stick-up" refers to the height of the reference survey datum. This point is determined within ± 0.01 foot in relation to mean sea level, which in turn is established by reference to an established National Geodetic Vertical Datum.

C. IMPLEMENTATION

- 1. The Permittee shall implement the compliance groundwater monitoring program established in this permit upon the effective date of this permit to determine if the regulated units are in compliance with the groundwater protection standard listed in Condition III.E. On that date, the compliance monitoring requirements set forth in this permit shall supersede those established in the 35 Ill. Adm. Code 725 interim status post-closure and groundwater quality assessment programs, and 35 Ill. Adm. Code 724 compliance monitoring program previously approved by the Illinois EPA.
- 2. The Permittee shall carry out the compliance monitoring program in this permit on the groundwater present beneath the CHSI facility in Chicago, Illinois. The uppermost aquifer is defined as a heterogeneous mixture of fill materials underlain and hydraulically connected to peat and organic silt of the Holocene Grayslake Peat.
- 3. The point of compliance is defined as a vertical surface located at the hydraulically downgradient limit of the surface impoundments that extends down into the uppermost aquifer underlying the surface impoundments. The point of compliance is identified on Drawing No. 4202 of the Approved Permit Renewal Application. The point of compliance is monitored by the following monitoring wells:

G14S, G15S, G16S, G17S, and G18S.

D. WELL LOCATIONS AND CONSTRUCTION

1. The Permittee shall maintain the groundwater monitoring wells identified in the table below to allow for the collection of groundwater samples. The location of these wells is specified in Drawing No. 4202 of the Approved Permit Renewal Application.

IEPA	Facility	Well	Well Depth	Well Screen
Well	Well	Depth	Elevation	Interval
<u>No.</u>	<u>No.</u>	(ft BGS)	(ft MSL)	(ft MSL)
			•	
G10S+	G123S	18.37	573.35	573.35-578.35
G11S+	G307S	13.34	575.70	575.70-585.70
G12S+	G334S	12.79	577.86	577.86-587.86
G13S+	G343S	12.91	577.60	577.60-587.60
G14S*	G120S	20.01	573.05	573.05-578.05
G15S*	G121SR	21.37	571.59	571.41-576.41
G16S*	G122S	18.71	573.71	573.54-578.54
G17S*	G124S	19.57	572.69	572.56-577.56
G18S*	G126S	15.92	576.20	576.20-581.20

Note:

- + Denotes Upgradient Well
- * Denotes Point of Compliance Well
- 2. Construction of each new monitoring well/piezometer must be at a minimum in accordance with the diagram contained in Attachment G-1 to this Permit unless otherwise approved in writing by the Illinois EPA. Any new monitoring well/piezometer must be continuously sampled and logged on an Illinois EPA Field Boring Log contained in Attachment G-2. The construction of any new monitoring well/piezometer must be documented on an Illinois EPA Well Completion Report contained in Attachment G-3.
- 3. The Permittee shall notify the Illinois EPA in writing within thirty (30) days if any of the monitoring wells identified in Condition III.D.1 are damaged or the structural integrity has been compromised. A proposal for the plugging and abandonment of the defective well and the installation of a replacement well shall accompany this notification. Unless the defective well is extremely damaged and would create a potential route for groundwater contamination, the defective well shall not be plugged until the replacement well is on-line and groundwater monitoring data has been obtained and verified by Illinois EPA personnel. Prior to replacing the well, the Permittee shall obtain written approval from the Illinois EPA regarding the proposed installation procedures and construction of the replacement well.
- 4. Should any monitoring well become consistently dry or unserviceable a replacement well shall be provided within ten (10) feet of the existing well. This well shall monitor the same geologic formation as the existing well and be constructed in accordance with

current Illinois EPA groundwater monitoring well construction standards at the time the well is replaced. A replacement monitoring well which is located greater than ten (10) feet from the existing monitoring well, and which does not monitor the same geologic formation, must be approved by the Illinois EPA and designated as a new monitoring well.

5. The Permittee shall submit field boring logs, monitoring well/piezometer construction diagrams and monitoring well completion data sheets of new or replacement monitoring wells to the Illinois EPA at the address below within thirty (30) days of the date that installation of the monitoring well/piezometer is completed. The Permittee shall submit certification that plugging and abandonment of a monitoring well/piezometer was carried out in accordance with the approved procedures to the Illinois EPA at the address below within thirty (30) days of the date that the monitoring well/piezometer is plugged and abandoned. All information should be submitted to the appropriate State Agencies.

Illinois Environmental Protection Agency Permit Section Bureau of Land -- #33 Post Office Box 19276 Springfield, Illinois 62794-9276

- 6. All monitoring wells/piezometers shall be equipped with protective caps and locks. Monitoring wells or piezometers located in a high traffic area must be protected with bumper guards.
- 7. All monitoring wells/piezometers not utilized in the approved groundwater monitoring system, but retained by the facility, must also be constructed and maintained in accordance with 77 Ill. Adm. Code, Part 920 regulations.

E. GROUNDWATER PROTECTION STANDARD

1. The following hazardous constituents and their concentration limits comprise the groundwater protection standard at the point of compliance. Total values shall be used for comparison with groundwater quality standards presented in 35 Ill. Adm. Code 620.420. Filtered samples collected for inorganic analysis shall be used for statistical evaluation. The Permittee shall monitor the groundwater at the monitoring wells as described in Condition III.D.1 for the following parameters:

Quarterly Parameter

Field Parameters	STORET	Reporting <u>Units</u>
pH (field measured)	00400	
Specific Conductance (field measured)	00094	micromos/cm
Temperature of Water Sample	00011	°F
Turbidity	45626	Ntus
Depth to Water (below land surface)	72019	Feet
Depth to Water (below measuring point)	72109	Ft - bgs
Elevation of Groundwater Surface	71993	Ft - MSL
Elevation of Bottom of Well #	72020	Ft - MSL
Elevation of Measuring Point (Top of		
casing) ##	72110	Ft - MSL

Shall be determined during the second sampling event each year

Shall be surveyed once every two (2) years, or at the request of the Illinois EPA, or whenever the elevation changes as required by Condition III.J.5.

		Concentration
Inorganic Parameters	STORET	Limit (mg/L)
Aluminum (tot)	01106	5.0
Aluminum (diss)	01105	ND
Arsenic (tot)	01002	0.2
Arsenic (diss)	01000	
Cadmium (tot)	01027	0.05
Cadmium (diss)	01025	
Chromium (tot)	01034	1.0
Chromium (diss)	01030	
Cyanide (tot)	00720	0.6
Fluoride (tot)	00951	4.0
Fluoride (diss)	00950	
Lead (tot)	01051	0.1
Lead (diss)	01049	~~
Mercury (tot)	71900	0.01
Mercury (diss)	71890	
Sodium (tot)	00929	20.0
Sodium (diss)	00930	·
Vanadium (tot)	01087	0.049
Vanadium (diss)	01085	

Organic Parameters	STORET	Concentration Limits (mg/L)
Acetone	81552	10.7
Acetonitrile	76997	$^{3}0.042$
Aniline	7,7089	² 0.023
Anthracene	34220	¹ 10.5
Benzene	34030	0.025
p-chloroaniline	73529	$^{1}0.028$
Chlorobenzene	34301	¹ 0.5
Chloroform	32106	0.0002
2-chlorophenol	34586	$^{1}0.175$
m-cresol	77151	$^{2}0.35$
p-cresol	77146	$^{2}0.035$
o-dichlorobenzene	34536	30.0
Dichlorodifluoromethane	34668	$^{2}7.0$
1,1-dichloroethylene	34501	0.035
2,4-dichlorophenol	34601	10.021
2,4-dimethylphenol	34606	$^{1}0.14$
2,6-dichlorophenol	77541	ND
p-dioxane	81582	² 0.001
Ethylbenzene	78113	1.0
Ethyl cyanide	77007	ND
Methylene chloride	34423	0.05
Methyl ethyl ketone	81595	² 4.2
4-methyl-2-pentanone	78133	ND
Naphthalene	34696	10.22
Phenols	32730	0.1
1,1,2-trichloroethane	34511	0.05
Toluene	34010	2.5
Vinyl chloride	39175	0.01
Xylene (total)	81551	10.0

ND: Not Determined. Insufficient data were available upon which to base a concentration limit. If the chemicals are still detected after all other concentration limits have been achieved, then the Illinois EPA will establish appropriate concentration limits at that time.

The concentration limits are obtained from 35 Ill. Adm. Code 742 (TACO) Appendix B, Table E, Class II, Groundwater Standards.

- The concentration limits are obtained from the Illinois EPA provisional standards.
- The concentration limit for this value was provided by the Illinois EPA.
- 2. The compliance period (post-closure period) during which the groundwater protection standard applies shall be extended until the Permittee demonstrates that the groundwater protection standard has not been exceeded at the point of compliance for three consecutive years.
- 3. Hazardous constituents which have not been detected above the concentration limit for a period of one year (four consecutive quarterly monitoring events) can be deleted from the list with prior approval from the Illinois EPA pursuant to the Class I* permit modification procedure.

F. COMPLIANCE MONITORING PROGRAM

The Permittee shall conduct the Compliance Monitoring Program in accordance with Section E of the Approved Permit Renewal Application, in accordance with the following:

- 1. The Permittee shall determine the groundwater quality and field parameters at each monitoring well identified in Condition III.D.1 during the post-closure care period to determine whether the regulated units are in compliance the groundwater protection standard as identified in Condition III.E.1.
 - a. Samples collected during the first, third and fourth quarters of the post-closure care period shall be analyzed for those hazardous constituents and field parameters identified in Condition III.E.1.
 - b. Samples collected during the second quarter of the post-closure care period shall be analyzed for those hazardous constituents and field parameters identified in Condition III.E.1 and the entire list of 35 Ill. Adm. Code 724, Appendix I parameters.
- 2. The Permittee shall evaluate the results of the analysis required by Condition III.E.1 above and identify:
 - a. The concentration of any constituent detected which was not detected in the previous sampling event.

- b. The concentration of any constituent detected which exhibits a progressive increase over four (4) consecutive sampling events.
- c. The concentration of any constituent detected which is equal to or greater than the groundwater protection standard listed in Condition III.E.1.
- 3. The Permittee, after following the requirements of 35 Ill. Adm. Code 724.199(g), shall add to the list of quarterly monitoring parameters identified in Condition III.E.1, (except those identified in 620.420(a)(2)) any constituent which has been found at a concentration above its respective PQL at any monitoring well at the point of compliance subsequent to the analyses required by Condition III.F.1.b.
- 4. The Permittee shall determine whether there is a statistically significant increase over background values for each constituent identified in Condition III.E.1 each time groundwater quality is determined at the point of compliance. In determining whether such an increase has occurred, the Permittee shall compare the groundwater quality at each monitoring well specified in Condition III.D.1 to background values derived in accordance with statistical procedures specified in Condition III.I.1.
- 5. The Permittee shall determine the groundwater flow rate and direction in the uppermost aquifer at least annually from the monitoring wells listed in Condition III.D.1.

G. GROUNDWATER ELEVATIONS

- 1. The Permittee shall determine the groundwater surface elevation referenced to mean sea level (MSL) each time a groundwater sample is collected at a well.
- 2. The Permittee shall determine the surveyed elevation of the "stick-up" referenced to MSL when the well is installed (with as-built diagrams) and every two years, or at the request of the Illinois EPA, or whenever the elevation changes.
- 3. Elevation, as referenced to MSL, of the bottom of each monitoring well (STORET 72020), is to be reported at least annually. The mandatory measurements shall be taken during the second quarterly sampling event each year.

H. SAMPLING AND ANALYTICAL PROCEDURES

1. The Permittee shall use the techniques and procedures described in Section E of the Approved Permit Renewal Application except as modified below, when obtaining and

analyzing samples from the groundwater monitoring wells described in Condition III.D.1:

- a. Samples shall be collected by the techniques described within Volume 2a, Section E; Appendix D within Volume II of Appendix 6 of the Approved Permit Renewal Application.
- b. Samples shall be preserved, shipped, and handled in accordance with the procedures specified within Volume 2a, Section E; Appendix D within Volume II of Appendix 6 of the Approved Permit Renewal Application.
- c. Samples shall be analyzed in accordance with the procedures specified within Volume 2a, Section E; Appendix D within Volume II of Appendix 6 of the Approved Permit Renewal Application.
- d. Samples shall be tracked and controlled using the chain of custody procedures specified within Volume 2a, Section E; Appendix D within Volume II of Appendix 6 of the Approved Permit Renewal Application.

I. STATISTICAL PROCEDURES

- 1. The Permittee shall use the statistical procedures described in Volume 2a, Section E.5, and within Volume 2b, Section E; Appendix H within Volume III of Appendix 6 of the Approved Permit Renewal Application, which are in keeping with USEPA's Statistical Analysis of Groundwater/Monitoring Data at RCRA Facilities, Interim Final Guidance (1989), or Addendum to Interim Final Guidance (1992).
- 2. Prediction limits shall be updated annually in accordance with the approved procedure set forth in Condition III.I.1 above.
- 3. Prediction limits established in accordance with Condition III.I.2 above shall be reported by July 15th of each year and are subject to approval by the Illinois EPA.

J. REPORTING AND RECORDKEEPING

1. The Permittee shall enter all monitoring, testing, and analytical data obtained in accordance with Condition III.E, III.F, III.G, III.H, and III.I in the operating record.

2. Samples collected to meet the requirements of the groundwater monitoring program as described in Condition III.E and III.F shall be collected and reported as identified in the table below. All additional data collected for the groundwater monitoring program (as specified in Condition III.H and III.I) shall also be submitted in accordance with the following schedule.

Samples to be	Results Submitted	•
Collected During	to the Illinois EPA	•
the Month of	by the Following	<u>Parameters</u>
January - February	April 15	F.1.a
April - May	July 15	F.1.a, F.1.b
July - August	October 15	F.1.a
October - November	January 15	F.1.a

Reports submitted to the Illinois EPA must clearly identify (1) any statistically significant increases and (2) any exceedances of appropriate groundwater classification standards.

- 3. Groundwater surface elevation data, measured pursuant to Condition III.G.1 shall be collected quarterly and submitted to the Illinois EPA as identified in the above table.
- 4. The Permittee shall report the groundwater flow rate and direction in the uppermost aquifer, as required by Condition III.F.5, during the second sampling event of each year.
- 5. The Permittee shall report the surveyed elevation, as required by Condition III.G.2 of the top of the well casing ("stick-up"), referenced to MSL, in accordance with the following schedule:
 - a. For the wells identified in Condition III.D.1. above, every two years (during the second sampling event), or at the request of the Illinois EPA, or whenever the elevation changes.
 - b. For any new wells, at the time of installation and reported in the as-built diagrams. Subsequent measurements shall be made every two (2) years (during the second sampling event), or at the request of the Illinois EPA, or whenever the elevation changes.
- 6. Elevation of the bottom of each monitoring well identified in Condition III.D.1 referenced to MSL, is to be reported annually. This measurement shall be taken during the second quarterly sampling event each year in accordance with Condition III.G.3.

- 7. Information required by Conditions III.J.2, III.J.3, and III.J.6 must be submitted in an electronic format. The information is to be submitted as fixed-width text files, formatted as found in Attachment G.5 of this Permit, in accordance with the schedule found in Condition III.J.2 above. Additional guidance regarding the submittal of the information in an electronic format can be found at www.epa.state.il.us/land/waste-mgmt/ground-monitoring.html.
- 8. The Permittee shall submit a completed "RCRA Facility Groundwater, Leachate and Gas Reporting Form" (LPC 592) as a cover sheet for any notices or reports required by the facility's Permit for identification purposes. Only one copy of the LPC 592 must accompany your submittal. However, the Permittee must submit one (1) original and (excluding the groundwater and leachate monitoring results submitted in an electronic format) a minimum of two (2) copies of each notice or report you submit to the Illinois EPA. The form is not to be used for Permit modification requests. A copy of the LPC 592 can be found in Attachment G.6 of this Permit. Additional copies can be found at www.epa.state.il.us/land/regulatory-programs/permits-and-management/forms/rcragroundwater-leachate-form.doc.
- 9. The Permittee shall report all information to the Illinois EPA in a form which can be easily reviewed. All submittals must contain tables of data, drawings and text (as necessary) to accurately describe the information contained in the submittal.
- 10. If the Permittee determines pursuant to Condition III.F.3 that Appendix I constituents are present at the point of compliance monitoring wells at concentrations above their respective PQLs and are not already identified as quarterly monitoring constituents, it shall:
 - a. Resample the well within one (1) month and repeat the Appendix I analysis. If the second analysis confirms the presence of new constituents the Permittee shall report the concentration of these additional constituents to the Illinois EPA within seven (7) days after the resample and add them to the monitoring list; or,
 - b. Not resample the well and report the concentrations of these additional constituents to the Illinois EPA within seven (7) days after completion of the initial analysis, and add them to the monitoring list.
- 11. If the Permittee determines that there is a statistically significant increase for any of the parameters specified in Condition III.E.1 at any monitoring well at the point of compliance, the Permittee shall:

- a. Notify the Illinois EPA in writing within seven (7) days indicating what parameters and wells have shown statistical increases and provide calculations.
- b. Submit to the Illinois EPA an application for a permit modification to establish a corrective action program meeting the requirements of 35 Ill. Adm. Code 724.200 within 180 days.
- 12. If the Permittee determines that there is a statistically significant increase for any of the parameters specified in Condition III.E.1, the Permittee may demonstrate that a source other than a regulated unit caused the contamination, or that the detection is an artifact caused by an error in sampling, analysis or statistical evaluation, or natural variation in groundwater. To make this demonstration the Permittee shall:
 - a. Notify the Illinois EPA in writing within seven (7) days that it intends to make a demonstration under 35 Ill. Adm. Code 724.199(i);
 - b. Within ninety (90) days, submit a report to the Illinois EPA which demonstrates that a source other than a regulated unit caused the standard to be exceeded or that the apparent noncompliance with the standards resulted from error in sampling, analysis or evaluation;
 - c. Within ninety (90) days, submit to the Illinois EPA an application for a permit modification to make any appropriate changes to the compliance monitoring program at the facility; and,
 - d. Continue to monitor in accord with the compliance monitoring program established under Condition III.H.

K. REQUEST FOR PERMIT MODIFICATION

- 1. If the Permittee determines that the compliance monitoring program no longer satisfies the requirements of 35 Ill. Adm. Code 724.199, then within ninety (90) days, the Permittee must submit an application for a permit modification to the Bureau of Land of the Illinois EPA to make any appropriate changes to the program which will satisfy the regulations.
- 2. Conditions in this Section of the Permit may be modified in accordance with 35 III. Adm. Code 705.128 if there is cause for such modification, as defined in 35 III. Adm. Code 702.184. Causes for modification as identified in this Section include, but are not limited to, alterations to the Permittee facility, additional information which would

have justified the application of different permit conditions at the time of issuance, and new regulations.

SFN:WRW:bjh\051161s.doc

SECTION IV: REPORTING AND NOTIFICATION REQUIREMENTS

The reporting and notification requirements of each section of the RCRA permit are summarized below. This summary is provided to highlight the various reporting and notification requirements of this permit.

Condition	Submittal	Due Date
SECTION I: CON	ITAINERS	
G(2)	Submit written notification to the Agency of failure of concrete surface coating	Within thirty days of becoming aware of the failure
G(2)	Submit application for modification of the permit	If necessary, no later than 180 days after failure of the coating
K(1)	Submit Construction Certification Report for proposed container storage units	30 days after completing the construction of the container storage area
L(1)	Submit written notification to the Agency of intent to close the container storage area	45 days prior to commencement of closure
L(1)	Submit sampling and analysis plan for review	45 days prior to commence to closure
L(5)	Submit application for modification of permit and post-closure care plan	No later than 30 days after determination that the container storage area cannot be clean closed
L(6)	Update financial assurance to include modification in Conditions I(K)(4) or I(K)(5)	30 days after permit is modified

Page IV-2 of IV-9

Clean Harbors Services, Inc RCRA Log No. B-16R-M-6

Condition	Submittal	Due Date
L(7)	Submit certification for closure of the container storage area	Within 60 days after closure is completed
SECTION II: TAN	K SYSTEMS	
C(3)	Submit written notification to the Agency of failure of the concrete coating system	Within thirty days of becoming aware of the failure
C(3)	Submit application for modification of the permit	If necessary, no later than 180 days after failure of the coating
D(1)(a)	Submit Construction Certification Report for the proposed tanks as required by 35 IAC 724.292 and 724.293	30 days after completing the construction of the tank systems
H(6)(i)	Submit results of tank integrity assessment	60 days after inspection
I(1)	Notify Agency of a leak or spill unless the spill or leak of hazardous waste is less than or equal to one pound and it is immediately container and cleaned up	24 hours after leak or spill occurs
I(2)	Submit report to the Agency on release and Permittee's response	30 days after leak or spill occurs
I(3)	Submit certification of major reports	Within seven days from returning tank system to service
L(1)	Submit written notification to the Agency of intent to close tank system(s)	45 days prior to commencement of closure

Page IV-3 of IV-9

Clean Harbors Services, Inc RCRA Log No. B-16R-M-6

Condition	Submittal	Due Date	
L(1)	Submit sampling and analysis plan	45 days prior to commencement of closure	
L(4)	Submit application for permit modification and post-closure care	30 days after determination that a tank system must be closed as a landfill	
L(5)	Update Financial Assurance for closure or post-closure	30 days after effective date of permit or modification of permit	
L(6)	Submit certification of closure of tank system(s)	60 days after closure of tank systems(s) is complete	
SECTION III: GROUNDWATER MONITORING			
I(3)	Submit prediction limits	By July 15 th of each year	
J(2)	Groundwater monitoring results	Quarterly	
J(3)	Groundwater surface elevation data	Quarterly	
J(4)	Groundwater flow rate and direction	By July 15 th of each year	
J(5)(a)	Surveyed elevation of the top of the well casing	By July 15 th biennially	
J(5)(b)	Surveyed elevation of the top of the well casing	Upon installation and by July 15 th biennially	
J(6)	Bottom of well elevation	By July 15 th of each year	
J(10)	Notification of constituents above PQL	Within 7 days	
J(11)(a)	Notification of statistically significant increase	Sample within 7 days of determination	

Condition	Submittal	<u>Due Date</u>
J(11)(b)	Submit application to establish corrective action program	Within 180 days of determination
J(12)(a)	Submit notice of intent to perform a demonstration	Within 7 days of the date exceedance is discovered
J(12)(b)	Submit report of demonstration	Within 90 days of the date exceedance is discovered
J(12)(c)	Modification to the compliance monitoring program	Within 90 days of the date exceedance is discovered
K(1)	Modification to the compliance monitoring program	Within 90 days of determining the program no longer satisfies 724.199

SECTION V: CORRECTIVE ACTION

Condition	Submittal	Due Date
C(4)	Phase I CMP Report	Within 90 days of notification
D(1)	Cost Estimate	Within the submittal of each workplan
D(2)	Documentation of financial assurance	Within 60 days of approval of cost estimate
E(1)	Notification of newly-identified SWMU's	Within 30 days after discovery
E(3)	A SWMU assessment plan	Within 60 days of IEPA request for

SECTION VI: STANDARD CONDITIONS

6	Complete application for new permit.	180 days prior to permit expiration.
11	Information requested by Agency and copies of records required to be kept by this permit.	Submittal date to be determined by Agency, but no later than 30 days from dated request.
	Written notification to the Agency of planned physical alterations or additions.	15 days prior to planned change.
15	Written notification to the Agency of changes which may result in permit noncompliance.	Within 15 days of change.
16	Application for permit modification indicating permit is to be transferred	At least 90 days prior to transfer date.
18	Submission of any information required in a compliance schedule	14 days after each schedule date
19	Report to Agency any non-compliance which may endanger health or environment	
	by telephone	24 hours after discovery
	in writing	5 days after discovery
20	Report all other instances of noncompliance	March 1 of each year along with Annual Report
27	Waste minimization certification	At least annually
28	Notify the Agency in writing of expected receipt of hazardous waste from a foreign source	4 weeks prior to receipt of waste

Page IV-6 of IV-9

Condition	Submittal	Due Date
40	Update arrangements with local authorities	At least annually
41	Implementation of Contingency Plan	As needed
	Notify appropriate state and local agencies with designated response roles	As needed
	Notify appropriate local officials	Immediately, if emergency coordinator's assessment indicates evacuation of local area is advisable
	Notify the Agency (217/782-3637) or Illinois EMA (217/782-7860) if the emergency coordinator determines	Immediately after determination made
	there has been a release, fire or explosion which could threaten human health or the environment, outside the facility	
. *	Notify Agency and appropriate state and local authorities, in writing that facility is in compliance with 35 Ill. Adm. Code 724.156(h)	Prior to resuming operation in affected areas
	Written Report to Agency with details regarding the incident which required implementation of contingency plan	15 days after event
47	Submit annual report required by 35 Ill. Adm. Code 724.175	March 1 of each year
49	Submit Application for permit modification amending closure plan	Within 90 days of discovery of need for modification

Page IV-7 of IV-9

Clean Harbors Services, Inc RCRA Log No. B-16R-M-6

Condition	Submittal	<u>Due Date</u>
50	Written notification to the Agency of closure	45 days prior to beginning closure
54(a)	Adjust closure cost estimate for inflation	Within 60 days prior to anniversary date of the establishment of the financial instrument
54(b)	Revision of closure cost estimate	As needed, within 90 days of discovery of revision
55	Change in financial assurance mechanism for closure	As needed
56	Change in coverage for sudden and non-sudden accidental occurrences	As needed
57	Written notification to the Agency of commencement of voluntary or involuntary bankruptcy proceedings	10 days after commencement of proceeding

SECTION VII: MISCELLANEOUS UNIT

Condition	Submittal	Due Date
K(1)	Submit Construction Certification Report for proposed Miscellaneous Units	30 days upon completing development and installation of the unit
L(1)	Submit written notification to the Agency of intent to close the container storage area	45 days prior to commencement of closure
L(1)	Submit sampling and analysis plan for review	45 days prior to commence to closure

Page IV-8 of IV-9

Condition	Submittal	Due Date	
L(5)	Submit application for modification of permit and post-closure care plan	No later than 30 days after determination that the container storage area cannot be clean closed	
L(6)	Update financial assurance to include modification in Conditions I(K)(4) or I(K)(5)	30 days after permit is modified	
L(7)	Submit certification for closure of the container storage area	Within 60 days after closure is completed	
SECTION VIII: SPECIAL CONDITIONS			
A(2)(b)	Notice of manifest discrepancy	Within 15 days after receiving the waste	
E(1)	Notify Agency's BOL Field Office	Within 24-hours of implementation of Contingency Plan	
E(2)	Notify Emergency Response Teams	Immediately upon implementation of contingency plan	
G(8)	LDR treatment demonstration	Within 30 days after completion of the analysis	
K(1)	A survey plat indicating the disposal area	By September 9, 2005	
K(1)	A certification by a land surveyor	By September 9, 2005	
K(2)	A statement by an independent fire control professional or the responsible fire department	By April 11, 2006	

Page IV-9 of IV-9

SECTION IX: AIR EMISSION STANDARDS FOR EQUIPMENT LEAKS

F(1)

Submit report semiannually

March 31st and

September 30th

SECTION X: AIR EMISSION STANDARDS FOR TANKS, SURFACE IMPOUNDMENTS AND CONTAINERS

D(1)

Submit report semiannually

March 31st and

September 30th

ATTACHMENT F: FINANCIAL ASSURANCE REQUIREMENTS

I(B)

Financial Assurance

60 days prior to placing

waste in units listed in

I.A.ii

SFN:WRW:bjh\051161s.doc

SECTION V CORRECTIVE ACTION

A. INTRODUCTION

- 1. In accordance with Section 3004 of RCRA and 35 IAC 724.201, the Permittee shall institute such corrective action as necessary to protect human health and the environment from all releases of hazardous wastes or hazardous constituents from any solid waste management unit (SWMU) at its facility in Chicago, Illinois. This section contains the conditions which must be followed to ensure these requirements are met.
- 2. A substantial amount of corrective action work has already been completed at this facility under the provisions of: (1) a RCRA permit initially issued to Clean Harbors on September 30, 1993; and (2) a Consent Order between USEPA and a former owner of a portion of the facility. This section summarizes that work and identifies what must still be done by the Permittee to complete its corrective action responsibilities for the SWMUs of concern at this facility.
- 3. The Permittee must provide corrective action, as appropriate, for any future releases from SWMUs present at the facility.
- 4. The requirements of 35 Ill. Adm. Code 742 must be met, when applicable, in establishing remediation objectives for corrective action.

B. CORRECTIVE ACTION ACTIVITIES COMPLETED TO DATE

The current Clean Harbors facility is actually comprised of two former hazardous waste management facilities. The northern portion of the current facility (approximately 30.6 acres in size) was formerly an interim status hazardous waste treatment facility (which included an incinerator) last owned/operated by Chemical Waste Management (CWM). The southern portion of the facility (approximately 26 acres in size) has been owned/operated by Clean Harbors since 1989 and received a RCRA permit for hazardous waste storage/treatment on September 30, 1993. On June 30, 1995, a modified RCRA permit was issued to Clean Harbors allowing it to incorporate the CWM facility into its RCRA permit.

A brief summary of relevant interim status closure and corrective action efforts completed to date at this facility is as following:

- 1. Interim status closure plans have been approved for several hazardous waste management units at the former CWM Incinerator facility, including the incinerator itself
 - a. These plans have been assigned Log Nos. C-742, C-759 and C-771 by Illinois EPA;
 - b. Closure (and thus corrective action) of all these units will essentially be considered complete upon the establishment of an engineered barrier and associated institutional control required by Illinois EPA's December 4, 2004 letter. Once the engineered barrier and institutional control are established, Clean Harbors will be required to comply with the requirements in the institutional control.
 - c. Additional remedial activities at these units shall be carried out under the provisions of their interim status closure plans.

More details regarding these efforts are contained in Attachment H.1.

- 2. Clean Harbors conducted a major upgrading during 1994-5 at the former CWM incinerator facility.
 - a. A pre-construction soil investigation was conducted at five of these units. Contaminated soil was encountered at the location of each proposed unit which required further evaluation under the facility's RCRA corrective action program;
 - b. Additional investigations have been completed at these units;
 - c. Each of these units is addressed in the Phase I Soils CMP submitted to Illinois EPA on May 7, 2004.

More details regarding these efforts are contained in Attachment H.2.

- 3. RCRA corrective action efforts conducted at the original Clean Harbors facility under its RCRA permit are as follows:
 - a. A total of 18 SWMUs were of concern
 - b. RFI activities are complete

- c. A Phase I CMP plan was submitted in May 2004 and is under review
- More details regarding these efforts are contained in Attachment H.3.
- 4. RCRA corrective action efforts conducted at the former CWM incinerator facility under a 3008(h) order between CWM and USEPA and the RCRA permit for this facility are as follows:
 - a. A total of 10 SWMUs were of concern
 - b. RFI activities are complete
 - c. A Phase I Soils CMP was submitted in May 2004 and is under review

More details regarding these efforts are contained in Attachment H.4.

C. CORRECTIVE MEASURE REQUIREMENTS

- 1. Permittee must implement a Corrective Measures Program (CMP) in general accordance with the procedures set forth in Attachment I to this permit. The corrective measures implemented by the Permittee must be sufficient to ensure the appropriate requirements of 35 Ill. Adm. Code 302, 620, 724, and 742 are met.
- 2. The types of corrective measures which may be implemented include, but are not limited to:
 - a. Removal of the contaminants or the contaminated media so that the remaining media meet remediation objectives developed in accordance with 35 Ill. Adm. Code 742;
 - b. Closing the SWMU as a landfill by establishing a proper final cover over the SWMU and then providing proper long-term monitoring/maintenance/management of: (1) leachate; (2) subsurface gas: (3) final cover system; and (4) groundwater;
 - c. Establishing engineered barriers to restrict exposure to the contaminants remaining at the SWMU (necessary to certain remediation objectives developed in accordance with 35 Ill. Adm. Code 742);

- d. Establishing institutional controls to restrict activities at the facility, as necessary, to support remediation objectives established in accordance with 35 Ill. Adm. Code 742.
- 3. The Corrective Measures Program described in Attachment I consists of five phases:
 - a. Phase I--conceptual design of the selected corrective measure;
 - b. Phase II--development of the final design plans for the corrective measure, including installation and operation/maintenance plans;
 - c. Phase III--actual construction/installation/implementation of the corrective measure;
 - d. Phase IV—operation/maintenance/monitoring, as necessary, of the corrective measure to ensure it is being properly implemented and is properly protecting human health and the environment.
 - e. Phase V--demonstration/verification that the corrective measure has been completed and that the established remediation objectives have been achieved.
 - f. Phases may be combined or skipped, depending on the actual corrective measure selected. The overall CMP implemented at a given SWMU must: (1) be logical in nature: and (2) allow for Illinois oversight and approval throughout the entire process. As such, it will be necessary for the Permittee to submit workplans/reports regarding all aspects of corrective measures for Illinois EPA review and approval prior to carrying out any corrective measure activity.
- 4. A Phase I CMP report, or its equivalent, must be submitted to Illinois EPA within ninety (90) days of the date that Illinois EPA notifies the Permittee of the need for a Corrective Measures Program.
- 5. Subsequent CMP reports must be submitted to Illinois EPA for review and approval in accordance with a schedule approved by Illinois EPA.
- 6. For units closed as landfills:

- a. The Phase II report must include a plan for the construction of a final cover system as well as a post-closure care plan (the post-closure care plan must include provisions for (1) inspecting the final cover; (2) monitoring the groundwater and soil gas; and (3) taking corrective action if any problems are observed during the inspection/monitoring effort.
- b. The Phase III report must document the construction of the approved final cover system.
- c. During Phase IV, quarterly reports must be submitted documenting the results of the inspection/monitoring efforts as well as any corrective measures taken in response to problems observed during these efforts. It will be necessary to submit plans to Illinois EPA for review and approval to address any groundwater quality or gas migration problems.
- d. The Phase V report will not be submitted until the post-closure care period has been completed. This report must demonstrate that all applicable post-closure requirements have been met and that the groundwater at the site meets the applicable standards.
- 7. Once all corrective measures have been completed, a report must be developed documenting all efforts and results associated with the completed measure, including, as appropriate, information demonstrating the approved remediation objectives for the project have been achieved.
- 8. Illinois EPA action on all Corrective Measures Program submittals shall be subject to the appeal provisions of Sections 39(a) and 40(a) of the Illinois Environmental Protection Act.
- 9. Groundwater for all portions of this facility, except that groundwater subject to the requirements of Section III of this permit, must meet the requirements of: (1) previous Illinois EPA letters and actions regarding groundwater, and (2) 35 Ill. Adm. Code 620, 724 and 742. In order to meet these requirements, a proposal for the establishment of a Groundwater Management Zone at the facility must be submitted within sixty (60) days of the Illinois EPA's approval of the Phase II Corrective Measures Program (CMP). This application must address all groundwater at the facility which exceeds the groundwater quality standards of 35 Ill. Adm. Code 620, and must be developed in accordance with 35 Ill. Adm. Code 620.250. A guidance document to be utilized for establishing a GMZ can be found at www.epa.state.il.us/land/regulatory-programs/permits-and-management/establishing-groundwater-management-zone.html.

D. FINANCIAL ASSURANCE FOR CORRECTIVE ACTION

- 1. The Permittee shall prepare a cost estimate for the completion of any corrective action required under this permit, in order to provide financial assurance for completion of corrective action, as required under 35 IAC 724.201(b). Such a cost estimate will be based upon the cost of contamination investigations and assessments for the SWMU(s), and design, construction, operation, inspection, monitoring, and maintenance of the corrective measure(s) to meet the requirements of 35 IAC 724.201 and this permit. This cost estimate must be included in each workplan or report submitted to Illinois EPA.
- 2. The Permittee shall demonstrate continuous compliance with 35 IAC 724.201 by providing documentation of financial assurance using a mechanism specified in 35 IAC 724.243, in at least the amount of the cost estimate required under Condition V.D.1. The words "completion of corrective action" shall be substituted for "closure and/or post-closure," as appropriate in the financial instrument specified in 35 IAC 724.251. This documentation shall be submitted to the Illinois EPA's DLPC within 60 days after the Illinois EPA's approval of the initial or revised cost estimates required under Condition V.D.1. The Illinois EPA's DLPC may accept financial assurance for completion of corrective action in combination with another financial mechanism that acceptable under 35 IAC 724.246 at its discretion.

E. REQUIREMENTS FOR ADDRESSING NEWLY- IDENTIFIED SWMU(s)

- 1. The Permittee shall notify the Illinois EPA's DLPC in writing of any newly-identified SWMU(s) discovered during the course of groundwater monitoring, field investigations, environmental audits, or other means, no later than thirty (30) calendar days after discovery. The notification shall provide the following information, as available:
 - a. The location of the newly-identified SWMU in relation to other SWMUs on a scaled map or drawing;
 - b. The type and past and present function of the unit;
 - c. The general dimensions, capacities, and structural description of the unit (available drawings and specifications provided);
 - d. The period during which the unit was operated;

- e. The specifics on all materials, including but not limited to, wastes and hazardous constituents, that have been or are being managed at the SWMU, to the extent available; and
- f. The results of any relevant available sampling and analysis which may aid in determining whether releases of hazardous wastes or hazardous constituents have occurred or are occurring from the unit.
- 2. If the submitted information demonstrates a potential for a release of hazardous waste or hazardous waste constituents from the newly identified SWMU, the Illinois EPA's DLPC may request in writing, that the Permittee prepare a Solid Waste Management Unit (SWMU) Assessment Plan and a proposed schedule of implementation and completion of the Plan for any additional SWMU(s) discovered subsequent to the issuance of this Permit. This SWMU Assessment plan must also propose investigations, including field investigations if necessary, to determine the release potential to specific environmental media for the newly-identified SWMU. The SWMU Assessment Plan must demonstrate that the sampling and analysis program, if applicable, is capable of yielding representative samples and must include parameters sufficient to identify migration of hazardous waste and hazardous constituents from the newly-discovered SWMU(s) to the environment. Additional guidance regarding the requirements of the SWMU Assessment Plan will be provided in Illinois EPA's written request for such a plan.
- 3. Within 60 calendar days after receipt of the Illinois EPA's DLPC request for a SWMU Assessment Plan, the Permittee shall submit a SWMU Assessment Plan.
- 4. After the Permittee submits the SWMU Assessment Plan, the Illinois EPA's DLPC shall either approve, approve with conditions or disapprove the Plan in writing. If the plan is approved, the Permittee shall begin to implement the Plan within forty-five (45) calendar days of receiving such written notification. If the Plan is disapproved, the Illinois EPA's DLPC shall notify the Permittee in writing of the Plan's deficiencies and specify a due date for submittal of a revised plan.
- 5. The Permittee shall submit a report documenting the results of the approved SWMU Assessment Plan to the Illinois EPA's DLPC in accordance with the schedule in the approved SWMU Assessment Plan. The SWMU Assessment Report shall describe all results obtained from the implementation of the approved SWMU Assessment Plan. Additional assessment work may be needed to fully characterize any contamination present at the SWMU.

6. The Permittee must implement a Corrective Measures Program, as necessary, to properly address any contamination encountered during the assessment. Guidance regarding the implementation of this program will be provided at the time Illinois EPA notifies the Permittee of the need for such a program.

F. FUTURE RELEASES FROM SWMUs

There exists a potential that a release may occur in the future from SWMUs identified in the RFA which did not require any corrective action at the time that the RFA or RFI was completed. If the Permittee discovers that a release has occurred from such a SWMU in the future, then the Illinois EPA must be notified of this release within thirty (30) days after its discovery following the procedures set forth in Condition V.E.1 above. Additional investigation and, as necessary, corrective measures efforts at this SWMU must be carried out in accordance with the procedure set forth in Subsection E above. The results of all corrective action efforts required by this condition must meet the requirements of 35 Ill. Adm. Code 724.201.

G. <u>INTERIM MEASURES/STABILIZATION</u>

The Permittee shall carry out interim measures/stabilization activities in order to prevent or mitigate the migration of a release of hazardous substances into the environment, and to provide adequate protection of public health, welfare and the environment.

At any time during the RFI, the Permittee may initiate additional interim measures for the purpose of preventing continuing releases and/or mitigating the results of releases and/or mitigating the migration of hazardous wastes or hazardous constituents. It shall not be necessary to conduct all phases of the RFI investigation prior to implementing an interim measure if the Illinois EPA's DLPC and the Permittee agree that a problem can be corrected, or a release cleaned up, without additional study and/or without a formal CMS.

- 1. Prior to implementing any interim measures beyond those specified above, the Permittee must submit detailed information regarding the proposed interim measure to the Illinois EPA's DLPC for approval. This information shall include, at a minimum:
 - a. Objectives of the interim measures: how the measure is mitigating a potential threat to human health and the environment and/or is consistent with and integrated into any long-term solution at the facility;
 - b. Design, construction, and maintenance requirements;

- c. Schedules for design and construction; and
- d. Schedules for progress reports.
- 2. If the Illinois EPA's DLPC determines that a release cannot be addressed without additional study and/or a formal CMS, then the Illinois EPA's DLPC will notify the Permittee that these must be performed. Any proposal made under this provision or any other activity resulting from such proposal, including the invocation of dispute resolution, shall not affect the schedule for implementation of the RFI or of any other portion of the permit.
- 3. If the Illinois EPA determines that interim measures are necessary to protect human health or the environment, the Permittee will be notified by way of a permit modification.

SFN:WRW:bjh\051161s.doc

SECTION VI: STANDARD CONDITIONS

GENERAL REQUIREMENTS

- 1. EFFECT OF PERMIT. The existence of a RCRA permit shall not constitute a defense to a violation of the Act or 35 Ill. Adm. Code Subtitle G, except for development, modification or operation without a permit. Issuance of this permit does not convey property rights or any exclusive privilege. Issuance of this permit does not authorize any injury to persons or property or invasion of other private rights, or infringement of state or local law or regulations. (35 Ill. Adm. Code 702.181)
- 2. PERMIT ACTIONS. This permit may be modified, reissued or revoked for cause as specified in 35 Ill. Adm. Codes 703.270 through 703.273 and Section 702.186. The filing of a request by the Permittee(s) for a permit modification or revocation, or a notification of planned changes or anticipated noncompliance on the part of the Permittee(s) does not stay the applicability or enforceability of any permit condition. (35 Ill. Adm. Code 702.146)
- 3. SEVERABILITY. The provisions of this permit are severable, and if any provision of this permit, or the application of any provision of this permit to any circumstance is held invalid, the application of such provision to other circumstances and the remainder of this permit shall not be affected thereby. (35 Ill. Adm. Code 700.107)
- 4. PERMIT CONDITION CONFLICT. In case of conflict between a special permit condition and a standard condition, the special condition will prevail. (35 Ill. Adm. Code 702.160)
- 5. DUTY TO COMPLY. The Permittee(s) shall comply with all conditions of this permit except the extent and duration such noncompliance is authorized by an emergency permit. Any permit noncompliance constitutes a violation of the Act and is grounds for an enforcement action; permit revocation or modification; or for denial of a permit renewal application. (35 Ill. Adm. Code 702.141 and 703.242)
- 6. DUTY TO REAPPLY. If the Permittee(s) wishes to continue an activity allowed by this permit after the expiration date of this permit, the Permittee(s) must apply for a new permit at least 180 days before this permit expires, unless written permission for a later date has been granted by the Agency. (35 Ill. Adm. Codes 702.142 and 703.125)
- 7. PERMIT EXPIRATION. This permit and all conditions herein will remain in effect beyond the permit's expiration date if the Permittee(s) has submitted a timely and complete application (see 35 Ill. Adm. Code 703.181-703.209) and through no fault of the Permittee(s) the Agency has not issued a new permit as set forth in 35 Ill. Adm. Code 702.125.

- 8. NEED TO HALT OR REDUCE ACTIVITY NOT A DEFENSE. It shall not be a defense for the Permittee(s) in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit. (35 Ill. Adm. Code 702.143)
- 9. DUTY TO MITIGATE. In the event of noncompliance with the permit, the permittee shall take all reasonable steps to minimize releases of hazardous substances to the environment. The Permittee(s) shall carry out such measures as may be necessary to prevent significant adverse impacts on human health or the environment. (35 Ill. Adm. Code 702.144)
- 10. PROPER OPERATION AND MAINTENANCE. The Permittee(s) shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the Permittee(s) to achieve compliance with the conditions of this permit. Proper operation and maintenance includes effective performance, adequate funding, adequate operator staffing and training, and adequate laboratory, and process controls, including appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems only when necessary to achieve compliance with the conditions of the permit. (35 Ill. Adm. Code 702.145)
- 11. DUTY TO PROVIDE INFORMATION. The Permittee(s) shall furnish to the Agency, within a reasonable time, but no later than thirty days, any relevant information which the Agency may request to determine whether cause exists for modifying, revoking and reissuing or terminating this permit, or to determine compliance with this permit. The Permittee(s) shall also furnish to the Agency, upon request, copies of records required to be kept by this permit. (35 Ill. Adm. Code 702.148)
 - Furthermore, the Permittee(s) shall provide to the Agency any documentation that is required by the Act or regulations.
- 12. INSPECTION AND ENTRY. The Permittee(s) shall allow an authorized representative of the Agency, upon the presentation of credentials and other documents as may be required by law, to:
 - a. Enter at reasonable times upon the Permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this permit;
 - b. Have access to and copy, at reasonable times, any records that must be kept under the conditions of this permit;

- c. Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and
- d. Sample or monitor, at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by the appropriate statute, any substances or parameters at any location. (35 Ill. Adm. Code 702.149)

13. MONITORING AND RECORDS. (35 Ill. Adm. Code 702.150)

- a. Samples and measurements taken for the purpose of monitoring shall be representative of the monitored activity. The method used to obtain a representative sample of the waste must be the appropriate method from Appendix A of 35 Ill. Adm. Code 721. Laboratory methods must be those specified in Test Methods for Evaluating Solid Waste: Physical/Chemical Methods, SW-846, latest versions; Methods for Chemical Analysis of Water and Wastes, EPA-600/4-79-020, latest versions; or an equivalent method as specified in the approved Waste Analysis Plan.
- b. The Permittee(s) shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports and records required by this permit, and records of all data used to complete the application for this permit for a period of at least 3 years from the date of the sample, measurement, report or application. These periods may be extended by request of the Agency at any time. The permittee shall maintain records from all groundwater monitoring wells and associated groundwater surface elevations, for the active life of the facility, and for disposal facilities for the post-closure care period as well.
- c. Records of monitoring information shall include:
 - i. The date(s), exact place, and time of sampling or measurements;
 - ii. The individual(s) who performed the sampling or measurements;
 - iii. The date(s) analyses were performed;
 - iv. The individual(s) who performed the analyses;
 - v. The analytical technique(s) or method(s) used; and
 - vi. The result(s) of such analyses. (35 Ill. Adm. Code 702.150)

- 14. REPORTING PLANNED CHANGES. The permittee shall give notice to the Agency as soon as possible of any planned physical alterations or additions to the permitted facility. For a new hazardous waste management facility, the permittee shall not commence treatment, storage or disposal of hazardous waste; and for a facility being modified the permittee shall not treat, store or dispose of hazardous waste in the modified portion of the facility, until:
 - a. The permittee has submitted to the Agency by certified mail or hand delivery a letter signed by the permittee and a registered professional engineer stating that the facility has been constructed or modified in compliance with the permit; and
 - b. 1. The Agency has inspected the modified or newly constructed facility and finds it is in compliance with the condition of the permit; or
 - 2. If, within 15 days of the date of submission of the letter in paragraph (a), the permittee has not received notice from the Agency of its intent to inspect, prior inspection is waived and the permittee may commence treatment, storage or disposal of hazardous waste. (35 Ill. Adm. Codes 703.244 and 702.152(a))
- 15. ANTICIPATED NONCOMPLIANCE. The Permittee(s) shall give advance notice to the Agency of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements, regulations, or the Act. For a new facility, the permittee shall not treat, store or dispose of hazardous waste; and for a facility being modified, the permittee shall not treat, store or dispose of hazardous waste in the modified portion of the facility, except as provided in Section 703.280, until:
 - i. The permittee has submitted to the Agency by certified mail or hand delivery a letter signed by the permittee and a registered professional engineer stating that the facility has been constructed or modified in compliance with the permit; and

ii. Either:

- a. The Agency has inspected the modified or newly constructed facility and finds it is in compliance with the conditions of the permit; or
- b. Within 15 days after the date submission of the letter in section i above, the permittee has not received notice from the Agency of its intent to inspect, the permittee may commence treatment, storage or disposal of hazardous waste.

- 16. TRANSFER OF PERMITS. This permit is not transferable to any person except after notice to the Agency. The Agency may require modification of the permit to change the name of the permittee and incorporate such other requirements as may be necessary under the appropriate Act. (See 35 Ill. Adm. Codes 703.260 and 703.270, in some cases modification is mandatory.) (35 Ill. Adm. Code 702.152(c)) The transferree shall submit any information the Agency shall request. The Agency determines whether the transferree is of sufficient good character.
- 17. MONITORING REPORTS. Monitoring results shall be reported at the intervals specified in the permit. (35 Ill. Adm. Code 702.152(d))
- 18. COMPLIANCE SCHEDULES. Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of this permit shall be submitted no later than specified in 35 Ill. Adm. Codes 702.162 and 702.152(e).

19. TWENTY-FOUR HOUR REPORTING.

- a. The Permittee(s) shall report to the Agency any noncompliance with the permit, regulations, the Act or any other matter which may endanger human health or the environment. Any such information shall be reported orally within 24 hours from the time the Permittee(s) becomes aware of the following circumstances. This report shall include the following:
 - i. Information concerning the release of any hazardous substance, agrichemical or pesticide that may cause harm to public drinking water supplies.
 - ii. Information concerning the release or discharge of any hazardous waste or of a fire or explosion at the HWM facility, which could threaten the environment or human health outside the facility.
- b. The description of the occurrence and its cause shall include:
 - i. Name, address, and telephone number of the owner or operator;
 - ii. Name, address, and telephone number of the facility;
 - iii. Date, time, and type of incident;
 - iv. Name and quantity of material(s) involved;

- v. The extent of injuries, if any;
- vi. An assessment of actual or potential hazards to the environment and human health outside the facility, where applicable; and
- vii. Estimated quantity and disposition of recovered material that resulted from the incident.
- c. A written submission shall also be provided within 5 days of the time the Permittee(s) becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance including exact dates and times and if the noncompliance has not been corrected; the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent recurrence of the noncompliance. The Agency may waive the five day written notice requirement in favor of a written report within fifteen days. (35 Ill. Adm. Codes 702.152(f) and 703.245(b))
- 20. OTHER NONCOMPLIANCE. The Permittee(s) shall report all instances of noncompliance not otherwise required to be reported under Standard Conditions 17, 18, and 19, at the time monitoring reports, as required by this permit, are submitted. The reports shall contain the information listed in Standard Condition 19. (35 Ill. Adm. Code 702.152(g))
- 21. OTHER INFORMATION. Where the Permittee(s) becomes aware that it failed to submit any relevant facts in the permit application, or submitted incorrect information in a permit application or in any report to the Agency, the Permittee(s) shall promptly submit such facts or information. (35 Ill. Adm. Code 702.152(h))
- 22. REPORTING REQUIREMENTS. The following reports required by 35 Ill. Adm. Code 724 shall be submitted in addition to those required by 35 Ill. Adm. Code 702.152 (reporting requirements):
 - a. Manifest discrepancy report: if a significant discrepancy in a manifest is discovered, the permittee must attempt to reconcile the discrepancy with the waste generator or transporter. If the discrepancy is not resolved within 15 days after receiving the waste, the permittee must immediately submit to the Agency a letter describing the discrepancy and attempts to reconcile it and a copy of the manifest or shipping paper at issue. (35 Ill. Adm. Code 724.172(b))
 - b. Unmanifested waste report: The permittee must submit to the Agency within 15 days of receipt of unmanifested waste an unmanifested waste report on EPA form 8700-13B. (35 Ill. Adm. Code 724.176)

- c. Annual report: an annual report must be submitted covering facility activities during the previous calendar year. (35 Ill. Adm. Code 724.175)
- 23. SUBMITTAL OF REPORTS OR OTHER INFORMATION. All written reports or other written information required to be submitted by the terms of this permit shall be sent to:

Illinois Environmental Protection Agency Bureau of Land Planning and Reporting Section 2200 Churchill Road Post Office Box 19276 Springfield, Illinois 62794-9276

- 24. SIGNATORY REQUIREMENT. All permit applications, reports or information submitted to the Agency shall be signed and certified as required by 35 Ill. Adm. Code 702.126 and 702.151.
- 25. CONFIDENTIAL INFORMATION. Any claim of confidentiality must be asserted in accordance with 35 Ill. Adm. Code 702.103 and 161.
- 26. DOCUMENTS TO BE MAINTAINED AT FACILITY SITE. The Permittee(s) shall maintain at the facility, until closure is complete, the following documents and amendments, revisions and modifications to these documents:
 - a. Waste analysis plan as required by 35 Ill. Adm. Code 724.113(b) and this permit.
 - b. Personnel training documents and records as required by 35 Ill. Adm. Code 724.116(d) and this permit.
 - c. Contingency plan as required by 35 Ill. Adm. Code 724.153(a) and this permit.
 - d. Closure plan as required by 35 Ill. Adm. Code 724.212(a) and this permit.
 - e. Cost estimate for facility closure as required by 35 Ill. Adm. Code 724.242(d) and this permit.
 - f. Operating record as required by 35 Ill. Adm. Code 724.173 and this permit.
 - g. Inspection schedules as required by 35 Ill. Adm. Code 724.115(b) and this permit.

27. WASTE MINIMIZATION. The Permittee(s) shall certify at least annually that the Permittee(s) has a program in place to reduce the volume and toxicity of hazardous waste that he generates to the degree determined by the Permittee(s) to be economically practicable, and the proposed method of treatment, storage, or disposal is that practicable method currently available to the Permittee(s) which minimizes the present and future threat to human health and the environment, in accordance with 35 Ill. Adm. Code 724.173(b)(9).

GENERAL FACILITY STANDARDS

- 28. NOTICE OF WASTE FROM A FOREIGN SOURCE. The permittee who has arranged to receive hazardous waste from a foreign source must notify the Agency in writing at least four weeks in advance of the date the waste is expected at the facility. (35 Ill. Adm. Code 724.112(a))
- 29. NOTICE OF WASTE FROM OFF-SITE. The Permittee(s) who receives hazardous waste from an off-site source (except where the Permittee(s) is also the generator), must inform the generator in writing that the permittee has the appropriate permits for, and will accept, the waste the generator is shipping. The Permittee(s) must keep a copy of this written notice as part of the facility operating record. (35 Ill. Adm. Code 724.112(b))
- 30. GENERAL WASTE ANALYSIS. The Permittee(s) shall comply with the procedures described in the approved waste analysis plan. (35 Ill. Adm. Code 724.113)
- 31. SECURITY. The Permittee(s) shall comply with the security provisions of 35 Ill. Adm. Code 724.114(b) and (c).
- 32. GENERAL INSPECTION REQUIREMENTS. The Permittee(s) shall follow the approved inspection schedule. The Permittee(s) shall remedy any deterioration or malfunction discovered by an inspection as required by 35 Ill. Adm. Code 724.115(c). Records of inspections shall be kept at the facility as required by 35 Ill. Adm. Code 724.115(d).
- 33. PERSONNEL TRAINING. The Permittee(s) shall conduct personnel training as required by 35 Ill. Adm. Code 724.116 and shall maintain training documents and records as required by 35 Ill. Adm. Code 724.116(d) and (e).
- 34. GENERAL REQUIREMENTS FOR IGNITABLE, REACTIVE, OR INCOMPATIBLE WASTE. The Permittee(s) shall comply with the requirements of 35 Ill. Adm. Code 724.117.

PREPAREDNESS AND PREVENTION

- 35. DESIGN AND OPERATION OF FACILITY. The Permittee(s) shall maintain and operate the facility to minimize the possibility of fire, explosion, or any unplanned sudden or non-sudden release of hazardous substance, agrichemical, or pesticide to air, soil, or surface water which could threaten human health or the environment. (35 Ill. Adm. Code 724.131) Additionally, the Permittee(s) shall remediate any release of a hazardous substance, agrichemical or pesticide.
- 36. REQUIRED EQUIPMENT. The Permittee(s) shall equip the facility with the equipment set forth in the approved contingency plan, as required by 35 Ill. Adm. Code 724.132.
- 37. TESTING AND MAINTENANCE OF EQUIPMENT. The Permittee(s) shall test and maintain the equipment specified in condition 36 as necessary to assure its proper operation in time of emergency. Such testing and maintenance activities are set forth in the approved inspection schedule. (35 Ill. Adm. Code 724.133)
- 38. ACCESS TO COMMUNICATIONS OR ALARM SYSTEM. The Permittee(s) shall maintain access to the communications or alarm system as required by 35 Ill. Adm. Code 724.134.
- 39. REQUIRED AISLE SPACE. The Permittee(s) shall maintain aisle space as required by 35 Ill. Adm. Code 724.135 and National Fire Protection Association (NFPA) requirements.
- 40. ARRANGEMENTS WITH STATE AND LOCAL AUTHORITIES AND EMERGENCY RESPONSE CONTRACTORS. The Permittee(s) shall attempt to make emergency response arrangements with State and local authorities and agreements with State emergency response teams and emergency response contractors and equipment suppliers as required by 35 Ill. Adm. Code 724.137. If State or local officials refuse to enter in preparedness and prevention arrangements with the Permittee, the Permittee(s) must document this refusal in the operating record.

CONTINGENCY PLAN

41. IMPLEMENTATION OF PLAN. The provisions of the contingency plan must be carried out by the Permittee(s) immediately whenever there is a fire, explosion or release of hazardous waste or hazardous waste constituents which could threaten human health or the environment (35 Ill. Adm. Code 724.151(b)). At a minimum, this includes any fire or explosion which occurs in an area where hazardous waste is being managed (treated, stored or disposed) (35 IAC 703.241). Within 15 days of any incident that requires implementation

- of the contingency plan, the owner or operator must submit a written report to the Agency as required by 35 Ill. Adm. Code 724.156(j).
- 42. COPIES OF PLAN. A copy of the contingency plan, including any revisions, must be maintained at the facility and submitted to all local police and fire departments, hospitals and state and local emergency response teams as required by 35 Ill. Adm. Code 724.153.
- 43. AMENDMENTS TO PLAN. The Permittee(s) shall review and immediately amend, if necessary, the contingency plan, as required by 35 Ill. Adm. Code 724.154.
- 44. EMERGENCY COORDINATOR. A trained emergency coordinator shall be available at all times in case of an emergency as required by 35 Ill. Adm. Code 724.155 and 724.156.

MANIFEST SYSTEM RECORD KEEPING AND REPORTING

- 45. MANIFEST SYSTEM. The Permittee(s) shall comply with the manifest requirements of 35 Ill. Adm. Code 724.171, 724.172 and 724.176.
- 46. OPERATING RECORD. The Permittee(s) shall maintain a written operating record at the facility in accordance with 35 Ill. Adm. Code 724.173.
- 47. ANNUAL REPORT. The Permittee(s) shall prepare and submit an annual report to the Agency prior to March 1st of each year in accordance with the requirements of 35 Ill. Adm. Code 724.175.

CLOSURE

- 48. PERFORMANCE STANDARD. The Permittee(s) shall close the facility as required by 35 Ill. Adm. Code 724.211 and in accordance with the approved closure plan.
- 49. AMENDMENT TO CLOSURE PLAN. The Permittee(s) must amend the closure plan whenever there is a change in the expected year of closure or whenever a change in the facility operation plans or facility design affects the closure plan pursuant to 35 Ill. Adm. Code 724.212(c).
- 50. NOTIFICATION OF CLOSURE. The Permittee(s) shall notify the Agency at least 45 days prior to the date it expects to begin closure. (35 Ill. Adm. Code 724.212(d))
- 51. TIME ALLOWED FOR CLOSURE. After receiving the final volume of hazardous waste, the Permittee(s) shall treat or remove from the site all hazardous waste and complete closure

- activities in accordance with the schedule(s) specified in the closure plan. (35 Ill. Adm. Code 724.213)
- 52. DISPOSAL AND/OR DECONTAMINATION OF EQUIPMENT. When closure is completed, the Permittee(s) shall decontaminate and/or dispose of all facility equipment and structures as required by the approved closure (35 Ill. Adm. Code 724.214) plan.
- 53. CERTIFICATION OF CLOSURE. When closure is completed, the Permittee(s) shall submit certification to the Agency in accordance with 35 Ill. Adm. Code 724.215 that the facility has been closed as specified by the approved closure plans.
- 54. COST ESTIMATE FOR FACILITY CLOSURE. The Permittee's original closure cost estimate, prepared in accordance with 35 Ill. Adm. Code 724.242, must be:
 - a. Adjusted for inflation either 60 days prior to each anniversary of the date on which the first closure cost estimate was prepared or if using the financial test or corporate guarantee, within 30 days after close of the firm's fiscal year.
 - b. Revised whenever there is a change in the facility's closure plan increasing the cost of closure.
 - c. Kept on record at the facility and updated. (35 Ill. Adm. Code 724.242)
 - d. Made immediately available to Agency personnel upon Agency request.
- 55. FINANCIAL ASSURANCE FOR FACILITY CLOSURE. The Permittee(s) shall demonstrate compliance with 35 Ill. Adm. Code 724.243 by providing documentation of financial assurance, as required by 35 Ill. Adm. Code 724.251, in at least the amount of the cost estimates required by the previous Permit Condition. Changes in financial assurance mechanisms must be approved by the Agency pursuant to 35 Ill. Adm. Code 724.243.
- 56. LIABILITY REQUIREMENTS. The Permittee(s) shall demonstrate continuous compliance with the requirements of 35 Ill. Adm. Code 724.247 and the documentation requirements of 35 Ill. Adm. Code 724.251.
- 57. INCAPACITY OF OWNERS OR OPERATORS, GUARANTORS, OR FINANCIAL INSTITUTIONS. The Permittee(s) shall comply with 35 Ill. Adm. Code 724.248 whenever necessary.

LAND DISPOSAL RESTRICTIONS

- 58. DISPOSAL PROHIBITION. Any waste identified in 35 Ill. Adm. Code Part 728, Subpart C, or any mixture of such a waste with non-restricted wastes, is prohibited from land disposal unless it meets the standards of 35 Ill. Adm. Code Part 728, Subpart D, or unless it meets the requirements for exemptions under Subpart C. "Land disposal" means placement in or on the land and includes, but is not limited to, placement in a landfill, surface impoundment, waste pile, injection well, land treatment facility, or vault intended for disposal.
- 59. DILUTION PROHIBITION. The Permittee(s) shall not in any way dilute a restricted waste or residual from treatment of a restricted waste as a substitute for adequate treatment in order to achieve compliance with 35 Ill. Adm. Code 728, Subpart D (35 Ill. Adm. Code 728.103).

60. WASTE ANALYSIS.

- a. The Permittee(s) must test his waste or extract developed, using the test method identified in Appendix I of 40 CFR Part 268, or use knowledge of the waste, to determine if the waste is restricted from land disposal.
- b. For any waste with treatment standards expressed as concentrations in the waste extract, the Permittee(s) must test the treatment residues or an extract of such residues developed using the test method described in Appendix I of 40 CFR Part 268, to assure that the treatment residues or extract meet the applicable treatment standard.
- c. If the treatment residues do not meet the treatment standards, or if the Permittee(s) ships any restricted wastes to a different facility, the Permittee(s) shall comply with the requirements applicable to generators in 35 Ill. Adm. Code 728.107 and 728.150(a)(1).

61. STORAGE RESTRICTIONS

a. The Permittee(s) shall not store hazardous wastes restricted from land disposal under 35 Ill. Adm. Code Part 728, Subpart C unless such wastes are stored only in containers or tanks, and are stored solely for the purpose of the accumulation of such quantities as is necessary to facilitate proper recovery, treatment, or disposal, and: (1) each container is clearly marked to identify its contents and the date each period of accumulation begins; (2) each tank is clearly marked to identify its contents, the quantity of each hazardous waste received, and the date each period of accumulation begins. In lieu of marking each tank with the required information, the Permitee may

maintain such information as part of the operating record of the facility (35 Ill. Adm. Code 728.150).

- b. The Permittee(s) must comply with the operating record requirements of 35 Ill. Adm. Code 724.173.
- 62. NEW DETERMINATIONS OF PROHIBITED WASTES. Wastes which are prohibited from land disposal under 35 Ill. Adm. Code Part 728, Subpart C, or for which treatment standards have been established under 35 Ill. Adm. Code 728, Subpart D, subsequent to the date of issuance of this permit, shall be subject to the conditions number 58 through 61 above.
- 63. DEFINITIONS. Within the scope of this permit "days" refers to calendar days unless otherwise specified.

SFN:WRW:bjh\051161s.doc

SECTION VII: MISCELLANEOUS UNIT

A. Summary

The Permittee may treat waste paints (including coatings, sealants, turpentine and mineral spirits used as paint thinner) identified by the hazardous waste codes D001 (ignitable) for characteristic, D004 through D008 for specific heavy metal toxics and D018 through D040 and D043 for specific organic toxics in the compactor located in Building 42:

The Permittee may shred full or partially full containers of waste, separate out the resulting metal container fragments and blend the container contents into pumpable slurries or non-disperable solids. The Permittee is prohibited from treating a hazardous waste in the shredder that has not been identified in Attachment A.

The Permittee may crush lamps identified by the hazardous waste codes D003 (reactive) for characteristic, D005, D006, D008 and D009 for specific heavy metal toxics in the lamp crusher located in Unit 25.

The Permittee may either install and operate the compactor or the shredder but not both units. If the Permittee installs one of the previously mentioned units and wishes to remove the unit and replace with the other unit, the replaced unit must undergo closure.

Miscellaneous Unit	Permitted Capacity	Unit Description
Compactor in Building 42	2 drums/hour @ 55 gallon/drum ~18,000 lbs/day	Main compartment 44.25" x 27" x 57". The compacter is shown on DWG 4281 of the approved permit application.
Shredder in Unit 24	maximum capacity 48,000 lbs. per hour	The shredder is shown on DWGs 4286 and 4288, operating descriptions, manufacturer's literature are included in Appendix D-43 of the approved permit application.
Lamp Crusher in Unit 25	2300 lbs/hr or 4000 lamps/hr	12' x 30' x 11'. The unit is shown and operating procedures discussed in Appendix D-60 of the approved permit application.

B. Operating Conditions

- i. The Permittee may operate the compactor identified in Condition VII.A under the following conditions:
 - 1. The closed vent system and carbon adsorption system shall be operated at all times when the unit is in use.
 - 2. The unit must be operated in compliance with the Clean Air Act and permit 96100095 issued by the Illinois EPA Bureau of Air, and any subsequent permits authorizing the operation of this unit.
 - 3. The Permittee is prohibited from processing waste in the compactor, if processing of the waste would cause a fire or explosion in the unit or a release to the environment.
 - 4. After completing development and installation of the unit and associated area (i.e., the compactor, the secondary containment system) the Permittee shall notify the Field Operation Section (FOS) and Permit Section prior to placing the unit into operation. Operation is allowed upon verbal approval from FOS or 15 days after notifying FOS the unit is operational unless deficiencies are noted during the inspection.
 - 5. The compactor shall not be operated unless the fire system (sprinkler) is operable in Building 42.
- ii. The Permittee may operate the shredder identified in Condition VII.A under the following conditions:
 - 1. The unit shall not be operated unless the concentration of oxygen in the air within the unit is between 4 and 8%.
 - 2. The unit shall not be operated when the carbon dioxide fire suppression system is not operable.
 - 3. The unit shall not be operated when the deflagration system is not operable.
 - 4. The unit shall not be operated when the carbon adsorption system is not operating or collection drums/hoppers are not in place beneath the shredder outlet.

- 5. The unit shall not be operated if the tank high level alarm on TK-414 has been activated and has not reset.
- 6. The closed vent system and carbon adsorption shall be operated at all times when the unit is in use.
- 7. The unit shall not be operated when the foam suppression system is inoperable.
- 8. The unit must be operated in compliance with the Clear Air Act and permit number 96100095 issued by the Illinois EPA Bureau of Air, and any subsequent permits authorizing the operation of this unit.
- iii. The Permittee may operate the lamp crusher identified in Condition VII.A under the following conditions:
 - 1. The unit must be operated in compliance with the Clean Air Act and the construction permit number 04060084 issued by the Illinois EPA Bureau of Air, and any subsequent permits authorizing the operation of this unit.
 - 2. The contingency plan must be implemented unless the spill or leak is less than or equal to one pound in quantity and immediately contained and cleaned up.
 - 3. The unit must run for 10 minutes following lamp processing.
 - 4. Each drum of co-products shall be visually inspected daily for signs of cross-contamination to ensure the unit is operating correctly. The Permittee shall cease operation of the lamp crusher if signs of cross-contamination are present. Operation of the lamp crusher shall not resume until the cause of the cross-contamination is remediated.
 - 5. The Permittee shall not operate the lamp crushing unit unless the mercury monitor for the workplace is operating.
 - 6. The mercury concentration in stack emission shall be monitored daily and the work place air quality monitored continuously.
 - 7. The Permittee shall determine the mercury concentration in the air at the inlet and outlet points of the carbon units, each operating day to ensure breakthrough has not occurred. The Permittee shall replace the activated carbon with new carbon within 24 hours if monitoring indicates the control device did not reduce the total mercury content of the inlet stream by 95%.

- 8. The Permittee shall not operate the lamp crushing unit unless the vapor collection system on the unit is operable. The Permittee shall operate the lamp crushing unit under negative pressure.
- 9. The Permittee shall not operate the lamp crushing unit in a manner that allows the ambient air mercury vapor concentration (work place) to exceed 0.05 mg/m³ based on a 10-hour time weighted average [TWA].
- 10. The Permittee shall not operate the lamp crushing unit in a manner that allows the ambient air mercury vapor concentration (work place) to exceed 0.1 mg/m³ at any time (based on an instantaneous reading).
- 11. The Permittee shall require personnel to wear at least a cartridge respirator (Mersob-P100 cartridges or equivalent) and ear protection when the unit is operating.
- iv. The Permittee shall not operate the compactor and shredder if the unit does not comply with the following conditions:
 - 1. The Permittee shall operate the closed vent system with no detectable emissions, as indicated by an instrument reading of less than 500 ppmv above background as determined by the procedures in 40 CFR 264.1034(b).
 - 2. The Permittee shall replace the activated carbon with new carbon within 24 hours if monitoring indicates the control device did not reduce the total organic content of the inlet vapor stream by 95%.
 - 3. The Permittee shall maintain negative pressure in the closed vent system during operation.
 - 4. The Permittee shall limit periods of planned routine maintenance of the control device during which the control devices does not meet the performance standard, to less than 240 hours per year.
 - 5. If the control device malfunctions, the Permittee shall correct the device as soon as practicable (no later than 24 hours) after the occurrences in order to minimize excess emissions of air pollutants.
 - 6. Before the unit becomes operational the Permittee shall conduct an initial leak detection test in accordance with 40 CFR 264.1034(b).

C. Recording and Maintaining Data

- 1. The Permittee shall record monitoring and inspection data in the operating record and maintain those records for three years. The Permittee shall make this information available to the Illinois EPA upon request.
 - i. The Permittee shall conduct monitoring on the Shredder and Compactor in accordance with the following conditions:
 - 1. The Permittee shall conduct hourly monitoring of the flow indicator sensor of the vent stream flow in the closed vent system. The information shall be recorded in the facilities operating record.
 - 2 The Permittee shall maintain records of the installation and replacement of the carbon filters.
 - The Permittee shall maintain daily recordings of each flame ionization detector (FID) test to demonstrate compliance with the performance standard.
 - The Permittee shall maintain the date and time of the periods of routine maintenance when routine maintenance of the control device does not meet the performance standard.
 - ii. The Permittee shall monitor the Lamp Crusher in accordance with the following conditions:
 - 1. The Permittee shall maintain records of the date and time when carbon filters are installed and removed.
 - 2. The Permittee shall maintain records of the mercury concentration in the work place and in the stack.

D. Performance Standard

The Permittee shall not operate the units identified in Condition VII(A) unless the performance standard is met. The performance standard used to determine compliance is reduction of the total organic content or mercury content of the inlet stream by 95%.

E. <u>Inspections</u>

- 1. Closed-vent system joints, seams or other connections shall be visually inspected annually for defects which could result in air emissions.
- 2. The pressure measurement device shall be inspected daily, when the unit is in operation, to verify that negative pressure is being maintained in the closed vent system when operating.
- 3. The Permittee shall inspect the miscellaneous unit in accordance with the inspection schedule specified in Attachment B to this permit.

F. Response to Leaks or Spills (Liquid or Solid)

In the event of a leak or a spill from the miscellaneous units which is not immediately cleaned up, or if a unit becomes unfit for continued use, the Permittee shall remove the system from service immediately and complete the following actions:

- 1. Appropriate action to clean up any release of waste from the miscellaneous unit shall be carried immediately after removing the system from system.
- 2. Remove all waste from the system within 24 hours of the detection of the leak or spill to prevent further releases and to allow inspection and repair of the system.
- 3. Determine the cause of the release.
- 4. Make any necessary repairs to fully restore the integrity of the system before returning the unit to service.
- 5. All wastes resulting from the cleanup of a spill or leak shall be managed as a hazardous waste.

G. Response to Leaks or Spills (Detectable Emissions) Organic

1. Detectable emissions, shall be controlled as soon as practicable, but not later than 15 calendar days after the emission is detected, or, if applicable, as allowed by 35 Ill. Adm. Code 724.934(1)(3)(iii), no later than the scheduled routine maintenance.

2. A first attempt at repair shall be made no later than 5 calendar days after the emission is detected.

H. Special Requirements for Ignitable or Reactive Waste

1. The Permittee shall take precautions to prevent accidental ignition or reaction of ignitable waste.

Ignitable wastes must be separated and protected from sources of ignition or reaction including but not limited to:

- a. Open flames, smoking, cutting and welding, hot surfaces, frictional heat, sparks (e.g., static, electrical, or mechanical), spontaneous ignition (e.g., from heat producing chemical reactions), and radiant heat.
- b. While ignitable waste is being handled, the Permittee must confine smoking and open flame to specially designated locations.
- c. "No Smoking" signs must be conspicuously placed wherever there is a hazard from ignitable waste.

I. Residues

1. A sample shall be taken of each drum of collected residue from the miscellaneous unit (compactor). A composite sample made from the individual samples collected from ten drums shall be analyzed for PCB's. If PCB's are detected, the individual drums shall be analyzed to discover the source of the PCB's. If the analysis shows that the concentration is greater than 50 ppm in a drum or drums, that waste must be handled as a TSCA waste. Otherwise, the waste must be handled under the RCRA regulations as a hazardous waste.

J. Waste Analysis

Compatibility of waste to be processed through the compactor shall be assessed by performing a liquid waste compatibility test as described in the letter dated September 17, 1993 from Paul Ahearn, CHCI. The compatibility of wastes received in Lab Packs may be assessed using EPA-600/2-80-076, "A Method for Determining the Compatibility of Hazardous Wastes".

K. General Construction Requirements

- 1. The Permittee(s) is authorized to construct the proposed Miscellaneous Units identified in Sections VII.A of this permit. The units may only be constructed in accordance with the approved Permit Application, subject to the following modifications.
 - a. Within thirty days after completing construction and prior to the units being operated, the Permittee(s) shall submit to the Illinois EPA a Construction Certification Report from a qualified, registered professional engineer, stating that the unit meets the requirements of 35 Ill. Adm. Code 724.701. This report shall contain the information required in Attachment C to this permit.
 - b. The Permittee(s) may not operate the unit until the Construction Certification Report is approved.

L. Closure

At closure, all waste and waste residues must be removed from the miscellaneous units. Closure of the miscellaneous units shall be carried out in accordance with the closure plan in the approved Permit Application, subject to the following modifications:

- 1. The Permittee(s) shall notify the Illinois EPA's Bureau of Land in writing of its intent to close these units at least 180 days prior to the date closure is expected to begin. Along with the notification, the Permittee(s) shall submit the sampling and analysis plan to be used in demonstrating that these areas have been properly decontaminated. The plan shall be approved by the Illinois EPA's Bureau of Land in writing prior to being implemented. Illinois EPA's review of this plan will be subject to the permit appeal provisions contained in Section 39(a) and Section 40(a) of the Act. The response from the Illinois EPA shall approve and establish:
 - a. The sampling plan;
 - b. What contaminants must be analyzed for; and
 - c. The level at which decontamination is considered complete.
- 2. The concrete surfaces underlying the miscellaneous units shall be visually inspected, photographed and any residue adhering to the surface must be removed by scraping and/or brushing. Following this, the concrete surfaces must be steam cleaned and triple rinsed. All wash water and rinse water shall be collected and managed as a hazardous

waste, unless the Permittee(s) can document that the waste is not hazardous as defined in 35 Ill. Adm. Code 721 103. An independent, registered, professional engineer must certify that the surface has no cracks, gaps or other defects which would allow waste to migrate through to the underlying soil. Otherwise, sampling in accordance with an approved sampling plan, shall be conducted to verify the underlying soil is uncontaminated.

- 3. All sweepings, wash water and rinsate generated during the closure of these units shall also be managed as a hazardous waste, unless it can be shown to be exempt under 35 Ill. Adm. Code Part 721.
- 4. The Permittee shall provide post-closure care in accordance with 35 Ill. Adm. Code Part 724 if all of the hazardous wastes or contaminated soils cannot be practicably removed or decontaminated in accordance with the closure requirements outlined in this permit and in the approved closure plan. If it is determined that the closure requirements cannot be met and post-closure care is required, the miscellaneous units shall be considered to be a landfill and the post-closure care plan in the approved application will be modified as required to provide adequate post-closure care for the affected units in accordance with 35 Ill. Adm. Code, Subtitle G, Part 724, Subparts G and H.
- 5. Should post-closure care, as described in Condition 4 above, become necessary, the Permittee shall submit an application for modification to this permit, including an amended closure plan and post-closure care plan for the affected units within thirty (30) days following discovery that clean closure cannot be accomplished. If a determination is made not to pursue clean closure prior to the implementation of the closure plan for the miscellaneous units, the modification request shall be made no later than sixty (60) days after the determination is made.
- 6. Financial assurance for closure and post-closure of any miscellaneous unit being closed as a landfill, when required in accordance with Conditions 4 and 5 above, shall be updated within thirty (30) days following modification of the permit under the provisions of Condition 5 above.
- 7. Within sixty (60) days after closure of any miscellaneous unit is complete, the Permittee shall submit certification to the Illinois EPA that the unit has been closed in accordance with the approved closure plan. The closure certification form in Attachment D to this permit or a certification with identical wording must be used. Signatures must meet the requirements of 35 Ill. Adm. Code Section 720.126. The independent engineer should be present at all critical, major points (activities) during the closure. These might include soil sampling, soil removal, backfilling, final cover

placement, etc. The frequency of inspections by the independent engineer must be sufficient to determine the adequacy of each critical activity. Financial assurance must be maintained for each tank system identified in Condition B.1 above. Documents regarding financial assurance for closure of this facility may be modified after the Illinois EPA approves the closure certification for any or all of the miscellaneous units. The Illinois EPA's review of closure certifications for partial or final closure will be reviewed in accordance with 35 Ill. Adm. Code 724.243.

A Closure Documentation Report is to be submitted with the closure certification which includes the following items, if applicable:

- a. The volume of waste and waste residue remove, including wastes generated during documentation procedures;
- b. A description of the method of waste handling and transport;
- c. Copies of the waste manifest;
- d. A description of the sampling and analytical methods used;
- e. A chronological summary of closure activities and the cost involved;
- f. Tests performed, methods and results;
- g. Color photographs of closure activities which document conditions before, during and after closure; and
- h. A scale drawing of all excavated or decontaminated areas and sample locations.
- 8. To avoid creating another regulated storage unit during closure, it is recommended that you obtain any necessary permits for waste disposal prior to initiating excavation activities. If it is necessary to store excavated hazardous waste on-site prior to off-site disposal, do so only in containers or tanks for less than ninety (90) days. Do not create regulated waste pile units by storing the excavated hazardous waste in piles. The permit exemption (35 Ill. Adm. Code 722.134) only applies to container and tanks.
- 9. Under the provisions of 29 CFR 1910 (51 FR 15,654, December 19, 1986), cleanup operations must meet the applicable requirements of OSHA's Hazardous Waste Operations and Emergency Response standard. These requirements include hazard communication, medical surveillance, health and safety programs, air monitoring, decontamination and training. General site workers engaged in activities that expose or

potentially expose them to hazardous substances must receive a minimum of 40 hours of safety and health training off site plus a minimum of three days of actual field experience under the direct supervision of a trained experienced supervisor. Managers and supervisors at the cleanup site must have at least an additional eight hours of specialized training on managing hazardous waste operations.

- 10. If the Illinois EPA determines that implementation of this closure plan fails to satisfy the requirements of 35 Ill. Adm. Code, Section 724.211, the Illinois EPA reserves the right to amend the closure plan. Revisions of closure plans are subject to the appeal provisions of Section 40 of the Act.
- 11. The Permittee shall analyze all samples individually (i.e., no composting). Sampling and analytical procedures shall be conducted in accordance with the latest edition of SW-846 and Attachment G to the Illinois EPA's closure plan instruction package. Sample size per interval shall be minimized to prevent dilution of any contamination. Apparent visually contaminated material within a sampling interval shall be included in the sample portion of the interval to be analyzed. To demonstrate a parameter is not present in a sample, analysis results must show a detection limit at least as low as the PQL for that parameter as identified in the latest edition of SW-846.

SFN:MAS:bjh\051161s.doc

Section VIII: Special Conditions

A. WASTE ANALYSIS

- 1. All hazardous waste blended into a fuel to be burned for energy recovery must have a heating value of at least 5,000 BTU/lb. This requirement may be superseded if Clean Harbors provide documentation to the Agency that all facilities which receive the waste fuel have a certification of compliance based on Clean Harbor's specification.
- 2. The Permittee(s) shall document the receipt of each load of waste at that site in the operating record. The results of any analyses and any supplemental analyses performed on any received waste shall also be placed in the operating record.
 - a. If manifest discrepancies are encountered, the procedures used to reconcile the discrepancy shall be included in the operating record;
 - b. If a manifest discrepancy is not resolved within (15) days after receiving the waste, the Permittee(s) must immediately submit a letter to the Agency's Bureau of Land, describing the discrepancy and attempts to reconcile it and a copy of the manifest or shipping paper at issue.
- 3. Used oil which is received at this facility for blending into a fuel program or re-refining is subject to a TCLP analysis unless an analysis (by EPA Method 9077) shows total halogens is less than 1000 ppm or an adequate rebuttal is made. Used oil destined for other uses besides a fuel program or re-refining (e.g., disposal, road application) are subject to the full TCLP requirements.

4. Storage

Before any waste other than lab packs or wastes with no free liquids are placed into a storage unit, facility management will assess the compatibility of the waste with the storage unit materials of construction and with wastes already stored therein.

- a. Containerized storage compatibility will be assessed by performing a Liquid Waste Compatibility Test as described in Appendix C-6 of the approved permit renewal application.
- b. <u>Tank Farm Compatibility</u> will be assessed by performing a Liquid Waste Compatibility Test on the liquid received for bulk storage with a composite

sample of the tanks within the containment system to which the new waste will be added.

The referenced procedure, Liquid Waste Compatibility Test D5058A, is described in the following publication "Annual Book of ASTM Standards", American Society for Testing Materials, 1916 Race Street, Philadelphia, PA 19013, most recent edition.

The test shall be conducted in the following manner, a 100 ml. proportional composite shall be made of the existing inventory in the storage area. A 5 ml. sample of the composite shall be mixed with a 5 ml. sample of the incoming waste to determine a compatibility. If no reaction is observed, 5 ml. of the incoming waste is added to the larger (remaining 95 ml.) composite in preparation for testing the next sample.

5. Each bulk shipment will be visually inspected and sampled to verify that the contents match the pre-acceptance description of the waste.

In the case of container shipments, each container in the shipment will be visually inspected by obtaining a full depth vertical sample to verify that the contents match the pre-acceptance physical description of the waste. Full vertical depth samples are not required in cases of hardened solids.

The Permittee(s) shall determine visual characteristics (color, obvious viscosity or lack thereof, phase character, odor,...) which are appropriate to each stream to aid in determining if the physical appearance of the waste received conforms to the description of the waste when initially evaluated. Changes in the visually determined characteristics require contacting the generator to reconcile the discrepancies. If the discrepancies cannot be reconciled this is a new waste which requires performing a pre-qualification analysis to fully evaluate its compatibility to the facility's operation.

- 6. The permittee is prohibited from receiving the following types of wastes under this permit:
 - a. radioactive material as defined by 49 CFR 173.403(y);
 - b. source, special nuclear, or by-product material as defined by the Atomic Energy Act of 1954;
 - c. Potentially Infectious Medical Waste (PIMW);
 - d. Municipal waste;
 - e. Construction or demolition waste; or

- f. Asbestos waste unless the waste complies with 61 CFR 145(c)(6) or is non-friable asbestos waste.
- 7. All trucks and containers that are shipped to the CHSI facility shall be sampled within 14 days of the date that they arrive at the facility.
- 8. Waste prequalification procedures may be waived and the permittee is authorized to accept hazardous and non-hazardous waste materials generated from off-site emergency response actions when the following conditions have been met:
 - a. an incident number has been issued for the emergency event,
 - b. the Agency's Emergency Response Unit (ERU) has determined that the incident is an immediate threat to human health or the environment, and,
 - c. ERU has approved the request to ship the waste to the permittee's facility.

A full analysis of the waste pursuant to the facilities Waste Analysis Plan shall be conducted once the shipment reaches the permittee's facility.

B. REPORTING REQUIREMENTS

1. Any incident which requires implementation of the contingency plan shall be recorded in the facilities operating record in an incident log which is maintained separate from the facilities other operating records. The incident log must include a copy of each incident report. In addition to the information identified in the approved application, the incident report must include, at a minimum, the waste management units involved in the incident, the cause of the release, measures taken to correct the situation and prevent a reoccurrence.


C. GENERAL OPERATING REQUIREMENTS

- 1. The permittee is prohibited from conducting any waste management activities outside the permitted boundaries of this facility without a permit modification and proof of compliance with Section 3.32 and Section 39(c) of the Act. Waste management includes storage, staging, treatment, sampling or all other activities not associated with transportation of waste.
- 2. The permittee shall not accept waste which has not been properly characterized in accordance with 35 Ill. Adm. Code 722.111.

- 3. The permittee shall not vent oxygen in Building 25 when containers of flammable materials are open or in the process of being moved, consolidated or sampled.
- 4. The permittee is allowed to vent the following compressed gas cylinders in Building 25 which contain only Carbon Dioxide, Nitrogen, Oxygen, Krypton, Argon, Neon, Helium, Xenon or Air.
- 5. The permittee shall cease venting of inert gases, and carbon dioxide if the oxygen concentration drops below 19.5% in Building 25.
- 6. The permittee shall cease venting of oxygen if the oxygen concentration reaches 23.5% in Building 25.

D. CONSTRUCTION REQUIREMENTS

- 1. The proposed hazardous waste management units must be constructed in accordance with the approved permit application and the Part B permit. Modification to the tank systems or tank or container secondary containment systems, including changes to physical dimensions or materials of construction, are subject to the permit modification requirements prior to construction. Changes in structural members or foundation design which are completed prior to the operation of the hazardous waste management unit and have been certified by the Illinois licensed structural engineer of record are not subject to the permit modification requirements provided the changes are made solely to maintain the structural integrity of the unit.
- 2. The Permittee(s) shall provide the concrete slab, the curbs and the walls that are used as part of the containment for the unloading areas with an impermeable surface coating that:
 - a. is compatible with the waste, or any other liquid, stored in the containment system; and
 - b. will prevent migration of the waste into the concrete of the slab or wall.
 - c. The Permittee(s) shall install a compatible caulking or sealant at each existing joint in the secondary containment system of the unloading areas to make the joint liquid tight. These joints include but are not limited to, all construction joints within the slab, walls and curbs and joints between the slab and curb, between two curbs, between the slab or curb and wall and joints between two walls. The caulking or sealant shall be compatible with the stored waste, or any other liquid, stored in the same containment system with the hazardous waste.



The coatings, caulking and/or sealant shall be applied prior to placing wastes in the units. Within thirty days after providing a coating/sealant to render the base impervious to wastes and precipitation, the Permittee(s) shall submit to the Agency a certification from an Illinois Registered Professional Engineer attesting to this fact. The certification shall contain the information described in Attachment C.

d. Clean Harbors shall perform a complete inspection of the surface coating yearly in the unloading areas and perform annual maintenance to insure the integrity of the coating.

E. CONTINGENCY PLAN

- 1. The Agency's Bureau of Land Field Office (Maywood) shall be notified within 24 hours of implementing the contingency plan unless the spill or leak is less than or equal to one pound in quantity and immediately contained and cleaned up. The contingency plan must be implemented whenever there is a fire, explosion or spill which involves hazardous waste or hazardous waste constituents which occurs in areas where hazardous waste is treated or stored. This includes spills within a containment system. A spill is any release of material outside the permitted unit, into or outside of the containment system. A spill shall not include controlled accumulation of hazardous waste in small containment devices (e.g., bucket, drip pan (but does not a include sump or the primary secondary containment unit)) used to collect and control the release of waste during routine processing or maintenance activities such as draining hoses or disassembling and repairing a pump.
- 2. The Permittee(s) shall contact the local emergency response entities immediately after implementation of the contingency plan unless the spill is less than quantity specified in the air modeling at 100 meters and it is immediately contained and cleaned up. The model spill volume may be adjusted without further modelling if an actual analyses of the waste on-hand is available. That is, the model spill volume may be multiplied by the inverse of the concentration (by weight percent) of the compound in question. This calculated spill volume would then be used to determine if the spill has a potential to impact areas off-site.
 - a. The entities which must be notified include:
 - 1. Chicago Police Department;
 - 2. Chicago Fire Department;

- 3. The Agency Field Office (Maywood);
- 4. The Illinois Emergency Management Agency (IEMA);
- 5. The National Response Center;
- 6. The Local Emergency Planning Committee; and
- 7. The Metropolitan Water Reclamation District of Greater Chicago.
- b. The information which must be initially relayed to each entity includes:
 - 1. The type of emergency (release, fire or explosion);
 - 2. The type of wastes involved in the emergency and the approximate quantity involved; and
 - 3. An initial assessment of the conditions at the site; and whether outside help is needed to properly respond to the situation.
- c. If the Permittee(s) is able to properly respond to the emergency without any aid from the entities identified in Condition 2.a above, the Permittee(s) shall notify each of these entities that the emergency situation no longer exists once all required emergency response and cleanup activities have been completed.
- 3. The Permittee shall provide applicable local emergency response entities with changes/modifications to the contingency plan and offer to meet and review the plan on an annual basis. Copies of the meeting notes and list with attendees shall be placed in the facility's operating record and be available to the Illinois EPA for review upon verbal or written request.

F. MISCELLANEOUS

- 1. The permittee is prohibited from performing hazardous waste management activities that are not specifically identified in this permit.
- 2. All used oil which contains greater than 1,000 ppm halogens and cannot be adequately rebutted are hazardous wastes and must be managed as a listed hazardous waste (i.e., the oil cannot be processed into an on-specification or off-specification used oil fuel).

- 3. All wastes dewatered by portable pumps must be analyzed by the paint filter test. Wastes which fail will still retain the characteristic of corrosivity.
- 4. Water reactive solids shall not be stored in the Bulk Solids Storage Area (Unit B).
- 5. The following activities are not permitted:
 - a. The treatment of characteristic (D002 only) oil within Processing Building #2 (Unit G); and
 - b. The bulking of hazardous wastes (which do not contain free liquids) within Process Building #2 (Unit G).
- 6. All waste stored in RCRA area must be managed as a RCRA waste. For example, it must be tested for compatibility and considered part of the volume limit.

G. LISTED WASTE TREATMENT

Stabilization

- 1. The stabilization area (Unit Z) cannot accept wastes containing over 2% (by weight) of mercury.
- 2. The stabilization area (Unit Z) cannot stabilize wastes containing parameters above land ban restrictions whose BDAT as identified in the Federal Register is not based on stabilization (i.e., cyanide, organics, etc.). Attachment A identifies acceptable codes of wastes which may be stabilized that have hazardous constituents above their maximum specified LDR limit.
- 3. Workers inside Process Building No. 3 (Unit Z) must wear respirators which are designs to remove particulates (HEPA) and organic compounds from the air they breathe. In addition, the workers must be equipped as necessary, to meet the applicable requirements of OSHA.
- 4. The following items shall be documented in the operating record for the Waste Stabilization Facility (Unit Z) regarding each load of waste received for stabilization/solidification:
 - a. Time and date that each waste load is received;
 - b. Permit number and manifest number associated with the waste;

- c. Waste name, generator name and location (including the USEPA and IEPA identification number);
- d. Volume of waste received;
- e. Identification of the receiving bay where the incoming waste is placed;
- f. Information pertaining to the actual treatment process, including:
 - i. The time and date when each waste load is treated at the mixing unit;
 - ii. The amount of material added to the waste in the mixing unit (mass per mass or mass per volume basis);
 - iii. Length of time treated waste "cures" before being subjected to the paint filter test, the penetrometer test and any additional tests;
 - iv. Results of the paint filter test; the penetrometer test, if applicable; and
 - v. All analytical results obtained in evaluating the stabilization achieved during treatment of the waste as required in.
- g. The results of the initial treatability study/development of the treatment recipe.
- 5. The areas where waste is handled within the stabilization building (Unit Z) (unloading area, mixing area, loading area, areas trafficked in transporting waste to and from the mixing unit (i.e., mixing box or mixing equipment)) shall be inspected each time after a mixing unit is either filled or emptied. Any waste residue observed on the floor shall be cleaned up immediately. Any spills which occur during the treatment process or during the movement of waste within the facility shall be responded to immediately in accordance with the contingency plan. Documentation of each inspection and spill incident shall be placed in the operating record.
- 6. The areas heavily trafficked during transport of waste to and from the mixing unit shall be cleaned at the end of each eight hour operating shift as time and circumstances allow in accordance with the following procedures:
 - a. Operation of the stabilization facility (Unit Z) shall cease during the required cleanup activities;

- b. The areas of concern shall be cleaned through use of a pressure washer or steam cleaner. Wastewater generated during this activity shall be directed to the collection sump.
- c. All washwater which collects in the sump shall be removed prior to resuming operation; and
- d. Documentation of the cleaning activities shall be placed in the operating record of this facility.
- 7. The mixing unit (i.e., the waste feed hoppers, the mixers, and all associated waste transfer appurtenances) or mixing boxes shall be completely emptied (i.e., as much waste as possible shall be removed) prior to placing a waste in the unit which is subject to different land disposal restrictions than the waste that was previously in the unit. The mixing unit mixing box will be considered empty when it contains no more than 3% (by weight) of the waste that was initially in the unit. Documentation of this cleaning effort shall be placed in the operating record for the facility.
- 8. Treated waste subject to the land disposal restrictions of 40 CFR 268 and/or 35 Ill. Adm. Code 728 shall be managed in accordance with the following procedures:
 - a. The treated waste shall not be placed in a landfill disposal unit until it has been demonstrated that the applicable restrictions are met.
 - b. Until such time as the analyses necessary to demonstrate compliance with these restrictions are completed, the treated waste shall be stored. Wastes subject to different land disposal restrictions shall be segregated from each other prior to, during and after treatment until it is demonstrated that the wastes have each passed the treatment standards applicable to that waste.
 - c. The container or tank may contain waste generated over more than one day of operation.
 - d. Once the samples required for the demonstration have been obtained, no new wastes may be added to the container(s) and a new container(s) for the waste of concern must be started.
 - e. The demonstration shall be carried out in accordance with the steps listed below:
 - i. To comply with the initial demonstration of documenting the facility's ability to treat a particular waste code. A representative sample shall be collected from the first twenty (20) roll-off boxes and an analyses performed to

demonstrate compliance with parameters specific to the Land Disposal Restrictions (LDR) for the pertinent waste code. The results of the sampling (before and after) shall be submitted to this Agency within 30 days after the completion of the analysis of the samples.

- ii. Once a facility has demonstrated its ability to meet the LDR standards for a particular code, the Permittee(s) may reduce the sampling frequency to the first and last batches, respectively, in any group of containers for which compliance is to be determined.
- iii. If the treatment standard for any of the constituents is exceeded:
 - a. Treated waste which fails to meet the requirements shall receive additional treatment (this may consist of additional curing time, reintroduction into the treatment facility for further stabilization or transfer to another facility for additional treatment).
 - b. In no event shall the waste be placed in a land disposal unit until the waste meets the applicable LDR standards.
- 9. All wastes which failed the gate control paint filter test shall be tested by the penetrometer test (after stabilization). No wastes which fails to possess a load bearing capacity of at least 2.0 tons per square foot (TSF) may be disposed.

H. CHEMICAL OXIDATION

1. Only the following waste codes may be processed in the listed waste treatment building utilizing the above method:

D018	Wastes containing less than 35 ppm benzene
D028	Wastes containing less than 10 ppm 1,2-Dichloroethane
D029	Wastes containing less than 100 ppm 1,1-Dichloroethylene
D030	Wastes containing less than 5 ppm 2,4-Dinitrotoluene
D032	Wastes containing less than 10 ppm Hexachlorobenzene
D033	Wastes containing less than 10 ppm Hexachlorobutadiene
D034	Wastes containing less than 5 ppm Hexachloroethane
D035	Wastes containing less than 400 ppm Methyl-Ethyl-Ketone
D036	Wastes containing less than 100 ppm Nitrobenzene
D039	Wastes containing less than 5 ppm Tetrachlorethylene
D040	Wastes containing less than 10 ppm Trichloroethylene

I. CARBON ADSORPTION

1. All wastes to be treated using carbon adsorption must be evaluated through a treatability study to determine if the carbon adsorption is effective in removing the organic constituents below MWRDGC's sewer discharge. Testing shall be conducted after actual treatment to verify treatment. For wastewater shipped off-site (in accordance with the LDR requirements), the Permittee(s) shall provide to the receiving facility a "certification" for all treatment standards that have been achieved, and/or a "notification" for all constituents which do not meet applicable LDR treatment standards. The results of each treatability study shall be retained as part of the operating record. This permit does not authorize the discharge of wastewater above MWRDGC's sewer discharge.

J. GENERIC WASTE STREAMS AUTHORIZATIONS PURSUANT TO SECTION 22.11 OF THE ENVIRONMENTAL PROTECTION ACT

- 1. The permittee is authorized to accept the wastes identified in Condition VIII(J)(2) below provided the generator complies with the following requirements:
 - a. The waste is analyzed in accordance with the waste analysis plan submitted as part of the approved Part B permit application, Condition VIII(A) and all subsequent waste analysis requirements included in the approved Part B Permit; and it is determined that the waste complies with the acceptance criteria in the approved waste analysis plan;
 - b. The waste is delivered in accordance with the "Non-hazardous Special Waste Hauling and the Uniform Program" as defined in 35 Ill. Adm. Code 809; and
 - c. The waste is accompanied by a manifest, if required.

The Agency has modified its procedures. As a result, an authorization number is no longer required. Therefore, the generator will no longer be required to identify the authorization number on the manifest when shipping waste as authorized by this permit.

- 2. The following categories of waste from more than one generator may be accepted:
 - a. Nonhazardous waste, received for storage and transfer offsite.
 - b. Nonhazardous waste, received for treatment.

- c. Hazardous waste, received for treatment.
- d. Hazardous waste, received for storage and transfer offsite.

K. Compliance Schedule

- 1. The following shall be completed and submitted to Illinois EPA by September 9, 2005:
 - a. A survey plat (i) indicating the location and dimensions of disposal units/areas with respect to permanently surveyed benchmarks and the legal boundary of the facility; (ii) a note on the plat stating: (1) The land has been used to manage hazardous waste; and (2) It's use is restricted so that disturbance of the units containing hazardous waste is prevented.
 - b. A certification of the plat by a professional land surveyor using the language specified by 35 Ill. Adm. Code 702.126(d)(1).
- 2. The following shall be completed and submitted to Illinois EPA by April 11, 2006:

A statement signed by an independent fire control professional or the responsible fire department certifying that the facility has water at adequate volume and pressure to supply water hose streams, foam producing equipment, automatic sprinklers or water sprays for Building(s) 42/24.

SFN:WRW:bjh\051161s.doc

Section IX. Air Emission Standards for Equipment Leaks

A. IDENTIFICATION OF REGULATED DEVICES

The permittee shall mark each piece of equipment to which Subpart BB applies with an equipment identification number and hazardous waste management unit identification.

B. LIGHT LIQUID SERVICE PUMPS

- 1. The permittee shall monitor each pump in light liquid services subject to Subpart BB as specified below:
 - a. conduct monthly monitoring to detect leaks as required by 35 Ill. Adm. Code 724.963(b) and described in Section BB of the permit application.
 - b. perform visual inspections each calendar week for indications of liquids dripping from the pump seal.
- 2. The permittee shall repair all pumps in light liquid service that are Subject to Subpart BB in accordance with the following:
 - a. When a leak is detected, it must be repaired as soon as practicable, but not later than 15 calendar days after it is detected. In the event more time is required, the permittee must submit a written explanation to the Illinois EPA. Such requests should be made in writing to the Bureau of Land's Field Operation Section within 10 calendar days of the leak detection.
 - b. A first attempt at repair (e.g., tightening the packing gland) must be made no later than 5 calendar days after each leak is detected.
 - c. A leak is detected from pumps in light liquid service if:
 - i) an instrument reading of 10,000 ppm or greater is measured, or
 - ii) there are indications of liquids dripping from the pump seal

C. PRESSURE RELIEF DEVICES

- 1. Except during pressure releases, the permittee shall operate each pressure relief device in gas vapor service that is subject to Subpart BB with no detectable emissions. No detectable emissions is indicated by an instrument reading of less than 500 ppm above background, as measured by the method specified in Section 724.963(c).
- 2. The permittee shall take the following actions following a pressure release:
 - a. After each pressure release, the pressure relief device must be returned to a condition of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as soon as practicable, but no later than 5 calendar days after each pressure releases.
 - b. When a leak is detected, it must be repaired as soon as practicable, but not later than 15 calendar days after it is detected. In the event more time is required, the permittee must submit a written explanation to the Illinois EPA. Such requests should be made in writing to the Bureau of Land's Field Operation Section within 10 calendar days of the leak detection.
 - c. No later than 5 calendar days after the pressure release, the pressure relief device must be monitored to conform the condition of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as measured by the method specified in Section 724.963(c) and Section BB of the permit application.

D. VALVES

- 1. The permittee shall monitor each valve in gas-vapor or light liquid service that is subject to Subpart BB monthly. Monitoring must be adequate to detect leaks by the methods specified in Section 724.963(b). The permittee shall implement procedures for leaks when an instrument reading of 10,000 ppm or greater is measured.
- 2. The permittee shall monitored and repair each valve in gas-vapor or light liquid service that is subject to Subpart BB in accordance with the following procedures:
 - a. Any valve for which a leak is not detected for two successive months may be monitored the first month of every succeeding quarter, beginning with the next quarter, until a leak is detected.

- b. If a leak is detected, the valve must be monitored monthly until a leak is not detected for two successive months.
- c. When a leak is detected, it must be repaired as soon as practicable, but not later than 15 calendar days after it is detected. In the event more time is required, the permittee must submit a written explanation to the Illinois EPA. Such requests should be made in writing to the Bureau of Land's Field Operation Section within 10 calendar days of the leak detection.
- d. A first attempt at repair must be made no later than 5 calendar days after each leak is detected.
- 3. The permittee shall make first attempts at repair which include, but are not limited to the following best practices when practicable:
 - a. Tightening of bonnet bolts.
 - b. Replacement of bonnet bolts.
 - c. Tightening of packing gland nuts.
 - d. Injection of lubricant into lubricated packing.

E. RECORD KEEPING

- 1. The permittee shall record the following information in the facility operating record:
 - a. For each piece of equipment to which Subpart BB applies:
 - 1) Equipment identification number and hazardous waste management unit identification.
 - 2) Approximate locations within the facility (e.g. gas-vapor or liquid).
 - 3) Type of equipment (e.g. a pump or pipeline valve).
 - 4) Percent-by-weight total organics in the hazardous wastestream at the equipment.
 - 5) Hazardous waste state at the equipment (e.g., gas-vapor or liquid).

- 6) Method of compliance with the standard (e.g., "monthly leak detection and repair" or "equipped with dual mechanical seals").
- 7) P&ID of the hazardous waste management unit that includes the BB equipment.
- b. A performance test plan as specified in Section 724.935(b)(3) for each control device (e.g., carbon canister that does not regenerate on-site).
- c. Documentation of compliance with Section 724.960, including the detailed design documentation or performance test results specified in Section 724.935(b)(4) and Section BB of the permit application.
- 2. When each leak is detected as specified in Section 724.952, 724.953, 724.957 or 724.958, the permittee shall comply with the following requirements.
 - a. A weatherproof and readily visible identification, marked with the equipment identification number, the date evidence of potential leak was found in accordance with Section 724.958(a), and the date the leak was detected, must be attached to the leaking equipment.
 - b. The identification on equipment required by Condition IX(E)(2)(a) above except valves, may be removed after it has been repaired.
 - c. The identification on a valve may be removed after it has been monitored for 2 successive months as specified in Section 724.957(c) and no leak has been detected during those 2 months.
- 3. When each leak is detected as specified in Section 724.952, 724.953, 724.957 or 724.958, the permittee shall record the following information in an inspection log which must be kept in the facility operating record:
 - a. The instrument and operator identification numbers and the equipment identification number.
 - b. The date evidence of a potential leak was found in accordance with Section 724.958(a).
 - c. The date the leak was detected and the dates of each attempt to repair the leak.
 - d. Repair methods applied in each attempt to repair the leak.

- e. "Above 10,000", if the maximum instrument reading measured by the methods specified in Section 724.963(b) after each repair attempt is equal to or greater than 10,000 ppm.
- f. "Repair delayed" and the reason for the delay if a leak is not required with 15 calendar days after discovery of the leak.
- g. A detailed description of the reasons that repair could not be effected without a hazardous waste management unit shutdown and the expected date of successful repair of the leak. If the leak is repaired within 15 calendar days, signed and certified by the facility operator in accordance with the procedures in 35 Ill. Adm. Code 702.126.
- h. The date of successful repair of the leak.
- 4. The permittee shall record design documentation on monitoring, operating and inspection information for each closed-vent system and control device required to comply with the provisions of Section 724.960. The information shall be kept-up-to-date in the facility operating record as specified in Section 724.935(d)(1) and (2), and monitoring, operating and inspection information in Section 724.935(c)(3) through (8).
- 5. The permittee shall record information pertaining to all equipment subject to the requirements of Subpart BB. The following information shall be kept in a log as part of the facility operating record:
 - a. A list of identification numbers for equipment (except welding fittings) subject to the requirements of Subpart BB.
 - b. A list of identification numbers for equipment that the owner or operator elects to designate for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, under the provisions of Sections 724.952(e), 724.953(i) and 724.957(f). The designation of this equipment must be signed and certified by the permittee using the language identified in 35 Ill. Adm. Code 702.126.
 - c. A list of equipment identification numbers for pressure relief devices to comply with Section 724.954(a).
 - d. Compliance testing information including copies of:
 - 1) The dates of each required compliance test.

- 2) The background level measured during each compliance test.
- The maximum instrument reading measured at the equipment during each compliance test.
- e. A list of identification numbers for equipment in vacuum service.
- 6. For valves complying with Section 724.962, the permittee shall record the following information in the facility operating record:
 - a. A schedule of monitoring.
 - b. The percent of valves found leaking during each monitoring period.
- 7. For each pump in light liquid service subject to Section 724.952, the permittee shall record the following information in a log that is kept in the facility operating record:
 - a. Criteria required in Section 724.952(d)(5)(B) and 724.953(e)(2) and an explanation of the design criteria.
 - b. Any changes in these criteria and the reasons for the changes.
- 8. For facilities using the skip period for valves, the permittee shall comply with 35 IAC 724.957, except as described below:
 - a. After two consecutive quarterly leak detection periods with the percentages of valves leaking equal to or less than 2 percent, the permittee may begin to skip one of the quarterly leak detection periods for the valves subject to 35 Ill. Adm. Code 724.957.
 - b. After five consecutive quarterly leak detection periods with the percentages of valves leaking equal to or less than 2 percent, the permittee may begin to skip three of the quarterly leak detection periods for the valves subject to 35 Ill. Adm. Code 724.957.
 - c. If the percentage of valves leaking is greater than 2 percent, the permittee must conduct monitoring monthly in compliance with the requirements of 35 IAC 724.957 and must notify the Agency's Bureau of Land Field Operation section. The permittee may again elect to use the skip period alternative for valves after.

F. REPORTING

- 1. The permittee must submit a semi-annual report to the Agency by the last day of March and September of each year. The report must include the following information:
 - a. The USEPA and Illinois EPA identification numbers (35 Ill. Adm. Code 722.112), name, and address of the facility.
 - b. For each month during the semi-annual reporting period:
 - 1) The equipment identification number of each valve for which a leak was not repaired as required in Section 724.957(d).
 - 2) The equipment identification number of each pump for which a leak was not repaired as required in Section 724.952(c) and (d)(6).
 - The equipment identification number of each compressor for which a leak was not repaired as required in Section 724.953(g).
 - c. Dates of hazardous waste management unit shutdowns that occurred with the semi-annual reporting period.
 - d. For each month during the semi-annual reporting period, dates when the control device installed as required by Sections 724.952, 724.953, 724.954 or 724.955, exceeded or operated outside of the design specifications as defined in Section 724.964(e) and as indicated by the control device monitoring required by Section 724.960 and was not corrected within 24 hours, the duration and cause of each exceedence, and any corrective measures taken.

If during the semi-annual reporting period, leaks from valves, pumps and compressors are repaired as required in Sections 724.957(d), 724.952(c) and (d)(6) and 724.953(g), respectively, and the control device does not exceed or operate outside of the design specifications as defined in Section 724.964(e) for more than 24 hours, a report to the Agency is not required.

The report shall be sent to the following address:

Illinois EPA BOL – Permit Section #33 1021 North Grand Avenue East Springfield, Illinois 62794-9276

SFN:MAS:bjh\051161s.doc

SECTION X: AIR EMISSION STANDARDS FOR TANKS, SURFACE IMPOUNDMENTS AND CONTAINERS

A. For tanks that vent to a control device

- 1. Whenever a waste is in the tank, the permittee shall not operate the fixed roof tanks identified in Unit 43, Unit 16 and Unit 22 unless each closure device has been secured in the closed position and the vapor headspace underneath the fixed roof has been vented to the control device except as follows:
 - a. To provide access to the tank for performing routine inspection, maintenance, or other activities needed for normal operations. Following completion of the activity, the owner or operator shall promptly secure the closure device in the closed position or reinstall the cover, as applicable, to the tank.
 - b. To remove accumulated sludge or other residue from the bottom of a tank.
 - c. To open a safety device to avoid an unsafe condition.
- 2. The permittee shall inspect and monitor the air emission control equipment in accordance with the following procedure:
 - a. The fixed roof and its closure devices must be visually inspected by the permittee to check for defects that could result in air pollutant emissions.
 - b. The closed vent system and control device must be inspected and monitored by the permittee in accordance with the procedures specified in 35 Ill. Adm. Code 724.987.
 - c. The permittee shall perform an initial inspection of the air emission control equipment on or before the date that the tank becomes subject to Subpart CC. Thereafter, the permittee shall perform the inspections at least once every year except for the special conditions provided for in 35 Ill. Adm. Code 724.984(1).
 - d. In the event a defect is detected, the permittee shall repair the defect in accordance with the requirements of condition B.
 - e. The permittee shall maintain a record of the inspection in accordance with the requirements specified in 35 Ill. Adm. Code 724.989(b).

B. Repair Condition

The permittee shall repair each defect detected during an inspection as follows:

- 1. The permittee shall make first efforts at repair of the defect no later than five calendar days after detection, and repair must be completed as soon as possible but no later than 45 calendar days after a detection.
- 2. Repair of a defect may be delayed beyond 45 calendar days if the permittee determines that repair of the defect requires emptying or temporary removal from service of the tank and no alternative tank capacity is available at the site to accept the hazardous waste normally managed in the tank. In this case, the permittee shall repair the defect the next time the process or unit that is generating the hazardous waste managed in the tank stops operation. Repair of the defect must be completed before the process or unit resumes operation.

C. Containers

Level 1 and/or Level 2 containers

- 1. Whenever hazardous waste is in a container subject to controls, the permittee shall install all covers and closure devices for the container and secure and maintain each closure device in closed position except:
 - a. Opening of a closure device or cover for a container is allowed for the purposes of adding/removing hazardous waste or material as follows:
 - 1. In the case where the container is filled to the intended final level in one continuous operation, the permittee shall promptly secure the closure devices in the closed position and install the covers upon conclusion of the filling operation.
 - 2. In the case where discrete quantities or batches of material intermittently are added to the container over a period of time, the permittee shall promptly secure the closure devices in the closed position and install covers upon either the container being filled to the intended final level; the completion of a batch loading after which no additional material will be added to the container within 15 minutes; the person performing the loading operation leaving the immediate vicinity of the container; or the shutdown of the process generating the material being added to the container, whichever condition occurs first.

- 3. An empty container, as defined in 35 Ill. Adm. Code 721.107(b), may be open to the atmosphere at any time.
- 4. In the case when discrete quantities or batches of material are removed from the container but the container does not meet the conditions to be an empty container as defined in 35 Ill. Adm. Code 721.107(b), the permittee shall promptly secure the closure devices in the closed position and install covers upon the completion of a batch removal after which no additional material will be removed from the container within 15 minutes or the person performing the unloading operation leaves the immediate vicinity of the container, whichever condition occurs first.
- b. Opening of a closure device or cover is allowed when access inside the container is needed to perform routine activities other than transfer of hazardous waste.
- c. Opening of a spring-loaded pressure-vacuum relief valve, conservation vent, or similar type of pressure relief device which vents to the atmosphere is allowed during normal operations for the purpose of maintaining the internal pressure of the container in accordance with the container design specifications.
- d. Opening of a safety device is allowed at any time conditions require doing so to avoid an unsafe condition.
- 2. The permittee shall inspect the containers and their covers and closure devices as follows:
 - a. In the case when a hazardous waste already is in the container at the time the permittee first accepts possession of the container at the facility and the container in not emptied within 24 hours after the container is accepted at the facility, the permittee shall visually inspect the container and its cover and closure devices to check for visible cracks, holes, gaps, or other open spaces into the interior of the container when the cover and closure devices are secured in the closed position. The container visual inspection must be conducted on or before the date on which the container is accepted at the facility.
 - b. In the case when a container used for managing hazardous waste remains at the facility for a period of one year or more, the permittee shall visually inspect the container and its cover and closure device initially and

thereafter, at least once every 12 months, to check for visible cracks, holes, gaps, or other open spaces into the interior of the container when the cover and closure devices are secured in the closed position.

c. When a defect is detected for the container, cover, or closure devices, the permittee shall make first efforts at repair of the defect no later than 24 hours after detection and repair must be completed as soon as possible butt no later than five calendar days after detection. If repair cannot be completed with five calendar days, then the hazardous waste must be removed from the container and the container must not be used to manage hazardous waste until the defect is repaired.

D. For control devices in 724.987

- 1. The permittee shall submit a semiannual written report to the Agency for control devices used in accordance with 35 Ill. Adm. Code 724.987, except as provided below. The report shall describe each occurrence during the previous 6-month period when either of the two following events occurs: a control device is operated continuously for 24 hours or longer in noncompliance with the applicable operating values defined in 35 Ill. Adm. Code 724.935(c)(4) or a flare is operated with visible emissions for five minutes or longer in a two-hour period, as defined in 35 Ill. Adm. Code 724.933(d). The written report shall include the USEPA identification number, the facility name and address, and an explanation why the control device could not be returned to compliance within 24 hours, and actions taken to correct the noncompliance. The report shall be signed and dated by an authorized representative of the permittee. The permittee must submit the report to the Agency by the last day of March and September of each year.
- 2. A report to the Agency is not required for a 6-month period during which all control devices subject to Subpart CC are operated by the permittee so that both of the following conditions result: during no period of 24 hours or longer did a control device operate continuously in noncompliance with the applicable operating values defined in Section 724.935(c)(4) and no flare was operated with visible emissions for five minutes or longer in a two-hour period, as defined in Section 724.933(d).

SFN:MAS:bjh\051161s.doc

ATTACHMENT A

WASTES WHICH CAN BE ACCEPTED AND HAZARDOUS WASTE IDENTIFICATION NUMBERS

LPC 0316000051

Clean Harbors Svcs Inc

RCRA Log No. B-16R

HAZARDOUS WASTE CODES ACCEPTABLE FOR THE RCRA EXEMPT WASTEWATER TREATMENT UNITS

**	•
н	azardous
11	azaruuus

Waste No. Description of Hazardous Waste

A. Characteristically Hazardous Waste

D001	Solid waste that exhibits the characteristic of ignitability, but is not listed as a hazardous waste (HN03 (>40%)).
D002	Solid waste that exhibits the characteristic of corrosivity, but is not listed as a hazardous waste.
D003	Solid waste that exhibits the characteristic of reactivity, but is not listed as a hazardous waste.
D004	Solid waste exhibiting the characteristic of TCLP toxicity for arsenic at 5.0 mg/l or more.
D005	Solid waste exhibiting the characteristic of TCLP toxicity for barium at 100 mg/l or more.
D006	Solid waste exhibiting the characteristic of TCLP toxicity for cadmium at 1.0 mg/l or more.
D007	Solid waste exhibiting the characteristic of TCLP toxicity for chromium at 5.0 mg/l or more.
D008	Solid waste exhibiting the characteristic of TCLP toxicity for lead at 5.0 mg/l or more.
D009	Solid waste exhibiting the characteristic of TCLP toxicity for mercury at 0.2 mg/l or more.
D010	Solid waste exhibiting the characteristic of TCLP toxicity for selenium at 1.0 mg/l or more.
.D011	Solid waste exhibiting the characteristic of TCLP toxicity for silver at 5.0 mg/l or more.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
D018	Solid waste exhibiting the characteristic of TCLP toxicity for benzene at 0.5 mg/l or more.
D019	Solid waste exhibiting the characteristic of TCLP toxicity for carbon tetrachloride at 0.5 mg/l or more.
D021	Solid waste exhibiting the characteristic of TCLP toxicity for chlorobenzene at 100.0 mg/l or more.
D022	Solid waste exhibiting the characteristic of TCLP toxicity for chloroform at 6.0 mg/l or more.
D023	Solid waste exhibiting the characteristic of TCLP toxicity for o-cresol at 200.0 mg/l or more.
D024	Solid waste exhibiting the characteristic of TCLP toxicity for m-cresol at 200.0 mg/l or more.
D025	Solid waste exhibiting the characteristic of TCLP toxicity for p-cresol at 200.0 mg/l or more.
D026	Solid waste exhibiting the characteristic of TCLP toxicity for cresol at 200.0 mg/l or more.
D027	Solid waste exhibiting the characteristic of TCLP toxicity for 1,4 dichlorobenzene at 7.5 mg/l or more.
D028	Solid waste exhibiting the characteristic of TCLP toxicity for 1,2 dichloroethane at 0.5 mg/l or more.
D029	Solid waste exhibiting the characteristic of TCLP toxicity for 1,1 dichloroethylene at 0.7 mg/l or more.
D030	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4 dinitrotoluene at 0.13 mg/l or more.

Hazardous	
Waste No.	Description of Hazardous Waste
D032	Solid waste exhibiting the characteristic of TCLP toxicity for hexachlorobenzene at 0.13 mg/l or more.
D033	Solid waste exhibiting the characteristic of TCLP toxicity for hexachlorobutadiene at 0.5 mg/l or more.
D034	Solid waste exhibiting the characteristic of TCLP toxicity for hexachloroethane at 3.0 mg/l or more.
D035	Solid waste exhibiting the characteristic of TCLP toxicity for methyl ethyl ketone at 200.0 mg/l or more.
D036	Solid waste exhibiting the characteristic of TCLP toxicity for nitrobenzene at 2.0 mg/l or more.
D039	Solid waste exhibiting the characteristic of TCLP toxicity for tetrachloroethylene at 0.7 mg/l or more.
D040	Solid waste exhibiting the characteristic of TCLP toxicity for trichloroethylene at 0.5 mg/l or more.
D041	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4,5 trichlorophenol at 400.0 mg/l or more.
D042	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4,6 trichlorophenol at 2.0 mg/l or more.
D043	Solid waste exhibiting the characteristic of TCLP toxicity for vinyl chloride at 0.2 mg/l or more.

B. Hazardous Wastes from Non-Specific Sources

Spent pickle liquor generated by steel finishing operations of facility within the iron and steel industry (SIC Code 331 and 332, as defined in 35 Ill. Adm. Code 720.110).

HAZARDOUS WASTE CODES ACCEPTABLE FOR THE LISTED WASTE TREATMENT PROCESS (NEUTRALIZATION, PRECIPITATION, COAGULATION, OXIDATION, STRIPPING OR CARBON ADSORPTION)

Hazardous

Waste No. Description of Hazardous Waste

A. Characteristically Hazardous Waste

D001	Solid waste that exhibits the characteristic of ignitability, but is not listed as a hazardous waste.
D002	Solid waste that exhibits the characteristic of corrosivity, but is not listed as a hazardous waste.
D003	Solid waste that exhibits the characteristic of reactivity, but is not listed as a hazardous waste.
D004	Solid waste exhibiting the characteristic of TCLP toxicity for arsenic at 5.0 mg/l or more.
D005	Solid waste exhibiting the characteristic of TCLP toxicity for barium at 100 mg/l or more.
D006	Solid waste exhibiting the characteristic of TCLP toxicity for cadmium at 1.0 mg/l or more.
D007	Solid waste exhibiting the characteristic of TCLP toxicity for chromium at 5.0 mg/l or more.
D008	Solid waste exhibiting the characteristic of TCLP toxicity for lead at 5.0 mg/l or more.
D009	Solid waste exhibiting the characteristic of TCLP toxicity for mercury at 0.2 mg/l or more.
D010	Solid waste exhibiting the characteristic of TCLP toxicity for selenium at 1.0 mg/l or more.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
D011	Solid waste exhibiting the characteristic of TCLP toxicity for silver at 5.0 mg/l or more.
D018	Solid waste exhibiting the characteristic of TCLP toxicity for benzene at 0.5 mg/l or more.
D019	Solid waste exhibiting the characteristic of TCLP toxicity for carbon tetrachloride at 0.5 mg/l or more.
D021	Solid waste exhibiting the characteristic of TCLP toxicity for chlorobenzene at 100.0 mg/l or more.
D022	Solid waste exhibiting the characteristic of TCLP toxicity for chloroform at 6.0 mg/l or more.
D023	Solid waste exhibiting the characteristic of TCLP toxicity for o-cresol at 200.0 mg/l or more.
D024	Solid waste exhibiting the characteristic of TCLP toxicity for m-cresol at 200.0 mg/l or more.
D025	Solid waste exhibiting the characteristic of TCLP toxicity for p-cresol at 200.0 mg/l or more.
D026	Solid waste exhibiting the characteristic of TCLP toxicity for cresol at 200.0 mg/l or more.
D027	Solid waste exhibiting the characteristic of TCLP toxicity for 1,4 dichlorobenzene at 7.5 mg/l or more.
D028	Solid waste exhibiting the characteristic of TCLP toxicity for 1,2 dichloroethane at 0.5 mg/l or more.
D029	Solid waste exhibiting the characteristic of TCLP toxicity for 1,1 dichloroethylene at 0.7 mg/l or more.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
D030	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4 dinitrotoluene at 0.13 mg/l or more.
D032	Solid waste exhibiting the characteristic of TCLP toxicity for hexachlorobenzene at 0.13 mg/l or more.
D033	Solid waste exhibiting the characteristic of TCLP toxicity for hexachlorobutadiene at 0.5 mg/l or more.
D034	Solid waste exhibiting the characteristic of TCLP toxicity for hexachloroethane at 3.0 mg/l or more.
D035	Solid waste exhibiting the characteristic of TCLP toxicity for methyl ethyl ketone at 200.0 mg/l or more.
D036	Solid waste exhibiting the characteristic of TCLP toxicity for nitrobenzene at 2.0 mg/l or more.
D037	Solid waste exhibiting the characteristic of TCLP toxicity for pentachlorophenol at 100 mg/l or more.
D038	Solid waste exhibiting the characteristic of TCLP toxicity for pyridine at 5.0 mg/l or more.
D039	Solid waste exhibiting the characteristic of TCLP toxicity for tetrachloroethylene at 0.7 mg/l or more.
D040	Solid waste exhibiting the characteristic of TCLP toxicity for trichloroethylene at 0.5 mg/l or more.
D041	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4,5 trichlorophenol at 400.0 mg/l or more.
D042	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4,6 trichlorophenol at 2.0 mg/l or more.

Hazardous

Waste No. Description of Hazardous Waste

D043 Solid waste exhibiting the characteristic of TCLP toxicity for vinyl chloride at

0.2 mg/l or more.

B. Hazardous Wastes From Non-Specific Sources

F001 The following spent halogenated solvents used in degreasing:

tetrachloroethylene, trichloroethylene, methylene chloride, 1,1,1-trichloroethane, carbon tetrachloride, chlorinated fluorocarbons, spent solvent mixtures/blends used in degreasing, and still bottom from the recovery of these spent solvents and

spent solvent mixtures.

F002 The following spent halogenated solvents: tetrachloroethylene, methylene

chloride, trichloroethylene, 1,1,1-trichloroethane, chlorobenzene,

1,1,2-trichloro-1,2,2-trifluoroethane, orthodichlorobenzene,

trichlorofluoromethane, 1,1,2-trichloroethane, spent solvent mixtures and blends, and the still bottoms from the recovery of these spent solvents and spent solvent

mixtures.

F003 The following spent non-halogenated solvents: xylene, acetone, ethyl acetate,

ethyl benzene, ethyl ether, methyl isobutyl ketone, n-buryl alcohol,

cyclohexanone, methanol, spent solvent mixtures and blends, and the still bottoms from the recovery of these spent solvents and spent solvent mixtures.

F004 The following spent non-halogenated solvents: cresols and cresylic acid,

nitrobenzene, spent solvent mixtures and blends, and still bottoms from the

recovery of these spent solvents and spent solvent mixtures.

The following spent non-halogenated solvents: toluene, methyl ethyl ketone,

carbon disulfide, isobutanol, pyridine, benzene, 2-ethoxyethanol, 2-nitropropane,

spent solvent mixtures and blends, and the still bottoms from the recovery of

these spent solvents and spent solvent mixtures.

F006 Wastewater treatment sludges from electroplating operations.

F007 Spent cyanide plating baths from electroplating operations.

Hazardous Waste No.	Description of Hazardous Waste
F008	Plating bath residues from the bottom of plating baths from electroplating operations where cyanides are used in the process.
F009	Spent stripping and cleaning bath solutions from electroplating operations where cyanides are used in the process.
F010	Quenching bath residues from oil baths from metal heat treating operations where cyanides are used in the process.
F011	Spent cyanide solutions from salt bath pot cleaning from metal heat treating operations.
F012	Quenching wastewater treatment sludges from metal heat treating operations where cyanides are used in the process.
F019	Wastewater treatment sludges from the chemical conversion coating of aluminum except from zirconium phosphating in aluminum can washing when such phosphating is an exclusive.
F039	Multi-Source leachate.

C. Hazardous Wastes From Specific Sources

K002	Wastewater treatment sludge from the production of chrome yellow and orange pigments.
K003	Wastewater treatment sludge from the production of molybdate orange pigments.
K004	Wastewater treatment sludge from the production of zinc yellow pigments.
K005	Wastewater treatment sludge from the production of chrome green pigments.
K006	Wastewater treatment sludge from the production of chrome oxide green pigments (anhydrous and hydrated).
K007	Wastewater treatment sludge from the production of iron blue pigments.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
K008	Oven residue from the production of chrome oxide green pigments.
K046	Wastewater treatment sludges from the manufacturing, formulation and loading of lead based initiating compounds.
K048	Dissolved air flotation (DAF) float from the petroleum refining industry.
K052	Tank bottoms (leaded) from the petroleum refining industry.
K060	Ammonia still lime sludge from coking operations.
K061	Emission control dust/sludge from the primary production of steel in electric furnaces.
K062	Spent pickle liquor generated by steel finishing operations of facilities within the iron and steel industry (SIC Codes 331 and 332) (as defined in 35 Ill. Adm. Code 720.110).
K069	Emission control dust/sludge from secondary lead smelting.
K086	Solvent washes and sludges, caustic washes and sludges, or water washes and sludges from cleaning tubs and equipment used in the formulation of ink from pigments, driers, soaps and stabilizers containing chromium and lead.
K087	Decanter tank tar sludge from coking operations.
K100	Waste leaching solution from acid leaching of emission control dust/sludge from secondary lead smelting.

HAZARDOUS WASTE CODES ACCEPTABLE FOR STABILIZATION/FIXATION

H	azardous	

Waste No. Description of Hazardous Waste

A. Characteristically Hazardous Waste

D004	Solid waste exhibiting the characteristic of TCLP toxicity for arsenic at 5.0 mg/l or more.
D005	Solid waste exhibiting the characteristic of TCLP toxicity for barium at 100 mg/l or more.
D006	Solid waste exhibiting the characteristic of TCLP toxicity for cadmium at 1.0 mg/l or more.
D007	Solid waste exhibiting the characteristic of TCLP toxicity for chromium at 5.0 mg/l or more.
D008	Solid waste exhibiting the characteristic of TCLP toxicity for lead at 5.0 mg/l or more.
D009	Solid waste exhibiting the characteristic of TCLP toxicity for mercury at 0.2 mg/l or more.
D010	Solid waste exhibiting the characteristic of TCLP toxicity for selenium at 1.0 mg/l or more.
D011	Solid waste exhibiting the characteristic of TCLP toxicity for silver at 5.0 mg/l or more.

B. Hazardous Waste From Specific Sources

K062 Spent pickle liquor generated by steel finishing operations of facilities within the iron and steel industry (SIC Codes 331 and 332) (as defined in 35 Ill. Adm. Code 720.110).

Hazardous

Waste No. Description of Hazardous Waste

aluminum.

C. Hazardous Waste From Non-Specific Sources

F006 ⁽¹⁾	Wastewater treatment sludges from electroplating operations except from the following processes: (1) sulfuric acid anodizing of aluminum; (2) tin plating on carbon steel; (3) zinc plating (segregated basis) on carbon steel; (4) aluminum or zinc-aluminum plating on carbon steel; (5) cleaning/stripping associated with tin, zinc and aluminum plating on carbon steel; and (6) chemical etching and milling of aluminum.
F007 ⁽¹⁾	Spent cyanide plating bath solutions from electroplating operations.
F008 ⁽¹⁾	Plating bath residues from the bottom of plating baths from electroplating operations where cyanides are used in the process.
F009 ⁽¹⁾	Spent stripping and cleaning bath solutions from electroplating operations where cyanides are used in the process.
F010 ⁽¹⁾	Quenching bath residues from oil baths from metal heat treating operations where cyanides are used in the process.
F011 ⁽¹⁾	Spent cyanide solutions from salt bath pot cleaning from metal heat treating operations.
F012 ⁽¹⁾	Quenching wastewater treatment sludges from metal heat treating operations where cyanides are used in the process.
F019 ⁽¹⁾	Wastewater treatment sludges from the chemical conversion coating of

The facility cannot stabilize wastes containing parameters above land ban restrictions whose BDAT as identified in the Federal Register is not based on stabilization (i.e., cyanide).

HAZARDOUS WASTE CODES ACCEPTABLE FOR STORAGE AND TRANSFER, SHREDDING, CRUSHING AND/OR FUEL BLENDING

Hazardous

Waste No. Description of Hazardous Waste

A. Characteristically Hazardous Waste

D001	Solid waste that exhibits the characteristic of ignitability, but is not listed as a hazardous waste.
D002	Solid waste that exhibits the characteristic of corrosivity, but is not listed as a hazardous waste.
D003 ²	Solid waste that exhibits the characteristic of reactivity, but is not listed as a hazardous waste.
D004	Solid waste exhibiting the characteristic of TCLP toxicity for arsenic at 5.0 mg/l or more.
D005 ²	Solid waste exhibiting the characteristic of TCLP toxicity for barium at 100 mg/l or more.
D006 ²	Solid waste exhibiting the characteristic of TCLP toxicity for cadmium at 1.0 mg/l or more.
D007	Solid waste exhibiting the characteristic of TCLP toxicity for chromium at 5.0 mg/l or more.
D008 ²	Solid waste exhibiting the characteristic of TCLP toxicity for lead at 5.0 mg/l or more.
D009 ²	Solid waste exhibiting the characteristic of TCLP toxicity for mercury at 0.2 mg/l or more.
D010	Solid waste exhibiting the characteristic of TCLP toxicity for selenium at 1.0 mg/l or more.
D011	Solid waste exhibiting the characteristic of TCLP toxicity for silver at 5.0 mg/l or more.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
D012	Solid waste exhibiting the characteristic of TCLP Toxicity for Endrin at 0.02 mg/l or more.
D013	Solid Waste exhibiting the characteristic of TCLP Toxicity for Lindane at 0.4 mg/l or more.
D014	Solid Waste exhibiting the characteristic of TCLP Toxicity for Methoxychlor at 10.0 mg/l or more.
D015	Solid waste exhibiting the characteristic of TCLP Toxicity for Toxaphene at 0.5 mg/l or more.
D016	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4-D at 10.0 mg/l or more.
D017	Solid waste exhibiting the characteristic of TCLP Toxicity for 2,4,5-TP (Silvex) at 1.0 mg/l or more.
D018	Solid waste exhibiting the characteristic of TCLP toxicity for benzene at 0.5 mg/l or more.
D019	Solid waste exhibiting the characteristic of TCLP toxicity for carbon tetrachloride at 0.5 mg/l or more.
D020	Solid waste exhibiting the characteristic of TCLP Toxicity for chlordane at 0.03 mg/l or more.
D021	Solid waste exhibiting the characteristic of TCLP toxicity for chlorobenzene at 100.0 mg/l or more.
D022	Solid waste exhibiting the characteristic of TCLP toxicity for chloroform at 6.0 mg/l or more.
D023	Solid waste exhibiting the characteristic of TCLP toxicity for o-cresol at 200.0 mg/l or more.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
D024	Solid waste exhibiting the characteristic of TCLP toxicity for m-cresol at 200.0 mg/l or more.
D025	Solid waste exhibiting the characteristic of TCLP toxicity for p-cresol at 200.0 mg/l or more.
D026	Solid waste exhibiting the characteristic of TCLP toxicity for cresol at 200.0 mg/l or more.
D027	Solid waste exhibiting the characteristic of TCLP toxicity for 1,4 dichlorobenzene at 7.5 mg/l or more.
D028	Solid waste exhibiting the characteristic of TCLP toxicity for 1,2 dichloroethane at 0.5 mg/l or more.
D029	Solid waste exhibiting the characteristic of TCLP toxicity for 1,1 dichloroethylene at 0.7 mg/l or more.
D030	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4 dinitrotoluene at 0.13 mg/l or more.
D031	Solid waste exhibiting the characteristic of TCLP Toxicity for heptachlor (and its epoxide) at 0.008 mg/l or more.
D032	Solid waste exhibiting the characteristic of TCLP toxicity for hexachlorobenzene at 0.13 mg/l or more.
D033	Solid waste exhibiting the characteristic of TCLP toxicity for hexachlorobutadiene at 0.5 mg/l or more.
D034	Solid waste exhibiting the characteristic of TCLP toxicity for hexachloroethane at 3.0 mg/l or more.
D035	Solid waste exhibiting the characteristic of TCLP toxicity for methyl ethyl ketone at 200.0 mg/l or more.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
D036	Solid waste exhibiting the characteristic of TCLP toxicity for nitrobenzene at 2.0 mg/l or more.
D037	Solid waste exhibiting the characteristic of TCLP toxicity for pentachlorophenol at 100.0 mg/l or more.
D038	Solid waste exhibiting the characteristic of TCLP toxicity for pyridine at 5.0 mg/l or more.
D039	Solid waste exhibiting the characteristic of TCLP toxicity for tetrachloroethylene at 0.7 mg/l or more.
D040	Solid waste exhibiting the characteristic of TCLP toxicity for trichloroethylene at 0.5 mg/l or more.
D041	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4,5 trichlorophenol at 400.0 mg/l or more.
D042	Solid waste exhibiting the characteristic of TCLP toxicity for 2,4,6 trichlorophenol at 2.0 mg/l or more.
D043	Solid waste exhibiting the characteristic of TCLP toxicity for vinyl chloride at 0.2 mg/l or more.

B. Hazardous Wastes From Non-Specific Sources

F002

F001	The following spent halogenated solvents used in degreasing tetrachloroethylene, trichloroethylene, methylene chloride, 1,1,1-trichloroethane, carbon tetrachloride, and chlorinated fluorocarbons; all spent solvent mixtures and blends used in degreasing containing, before use, a total of ten percent or more (by volume) of one or more of the above halogenated solvents or those solvents listed in F002, F004 or F005; and still bottoms from the recovery of these spent solvents and spent solvent mixtures.

The following spent halogenated solvents: tetrachloroethylene, methylene chloride, trichloroethylene, 1,1,1-trichloroethane, chlorobenzene, 1,1,2-trichloro-1,2,2-trifluoroethane, orthodichlorobenzene,

Hazardous

Waste No.

Description of Hazardous Waste

trichlorofluoromethane; and 1,1,2-trichloroethane; all spent solvent mixtures and blends containing, before use, a total of ten percent or more (by volume) of one or more of the above halogenated solvents or those solvents listed in F001, F004, or F005; and still bottoms from the recovery of these spent solvents and spent solvent mixtures.

F003

The following spent non-halogenated solvents: xylene, acetone, ethylacetate, ethyl benzene, ethyl ether, methyl isobutyl ketone, n-butyl alcohol, cyclohexanone, and methanol; all spent solvent mixtures and blends containing, before use, only the above spent non-halogenated solvents; and all spent solvent mixtures and blends containing, before use, one or more of the above non-halogenated solvents and a total of ten percent or more (by volume) of one or more of those solvents listed in F001, F002, F004 or F005; and still bottoms from the recovery of these spent solvents and spent solvent mixtures.

F004

The following spent non-halogenated solvents: cresols and cresylic acid, and nitrobenzene; all spent solvent mixtures and blends containing, before use, a total of ten percent or more (by volume) of one or more of the above non-halogenated solvents or those solvents listed in F001, F002 or F005; and still bottoms from the recovery of these spent solvents and spent solvent mixtures.

F005

The following spent non-halogenated solvents: toluene, methyl ethylketone, carbon disulfide, isobutanol, pyridine, benzene, 2-ethoxyethanol and 2-nitropropane; all spent solvent mixtures and blends, containing, before use, a total of ten percent or more (by volume) of one or more of the above non-halogenated solvents or those solvents listed in F001, F002 or F004; and still bottoms from the recovery of these spent solvents and spent solvent mixtures.

F006

Wastewater treatment sludges from electroplating operations except from the following processes: (1) sulfuric acid anodizing of aluminum; (2) tin plating on carbon steel; (3) zinc plating (segregated basis) on carbon steel; (4) aluminum or zinc-aluminum plating on carbon steel; (5) cleaning/stripping associated with tin, zinc and aluminum plating on carbon steel; and (6) chemical etching and milling of aluminum.

F007

Spent cyanide plating bath solutions from electroplating operations.

1	
<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
F008	Plating bath residues from the bottom of plating baths from electroplating operations where cyanides are used in the process.
F009	Spent stripping and cleaning bath solutions from electroplating operations where cyanides are used in the process.
F010	Quenching bath residues from oil baths from metal heat treating operations where cyanides are used in the process.
F011	Spent cyanide solutions from salt bath pot cleaning from metal heat treating operations.
F012	Quenching wastewater treatment sludges from metal heat treating operations where cyanides are used in the process.
F019	Wastewater treatment sludges from the chemical conversion coating of aluminum.
*F020 ¹	Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production or manufacturing use (as a reactant, chemical intermediate, or component in a formulating process) of tri-, or tetrachlorphenol, or of intermediates used to produce their pesticide derivatives. (This listing does not include wastes from the production of Hexachlorophene from highly purified 2, 4, 5-trichlorophenol.)
*F021 ¹	Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production or manufacturing use (as a reactant, chemical intermediate or component in a formulating process) of pentachlorophenol, or of intermediates used to produce its derivatives.
*F022 ¹	Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the manufacturing use (as a reactant, chemical intermediate, or component in a formulating process) of tetra-, penta-, or hexachlorobenzenes under alkaline conditions.
*F0231	Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production of materials on equipment previously used for

Hazardous Waste No.

Description of Hazardous Waste

the production or manufacturing use (as a reactant, chemical intermediate or component in a formulating process) of tri- and tetrachlorophenols. (This listing does not include wastes from equipment used only for the production or use of hexachlorophene from highly purified 2,4,5-trichlorophenol.)

F024

Process wastes including but not limited to, distillation residues, heavy ends, tars, and reactor cleanout wastes, from the production of certain chlorinated aliphatic hydrocarbons by free radical catalyzed processes. These chlorinated aliphatic hydrocarbons are those having carbon chain lengths ranging from one to and including five with varying amounts and positions of chlorine substitution. (This listing does not include wastewaters, wastewater treatment sludges, spent catalysis and wastes listed in this Section 721.132.)

F025

Condensed light ends, spent filters and filter aids, and spent desiccant wastes from the production of certain chlorinated aliphatic hydrocarbons by free radical catalyzed processes. These chlorinated aliphatic hydrocarbons are those having carbon chain lengths ranging from one to and including five, with varying amounts and positions of chlorine substitution.

*F0261

Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production of materials on equipment previously used for the manufacturing use (as a reactant, chemical intermediate or component in a formulating process) of tetra-, penta- or hexachlorobenzene under alkaline conditions.

*F0271

Discarded unused formulations containing tri-,tetra- or pentachlorophenol or discarded unused formulations containing compounds derived from these chlorophenols. (This listing does not include formulations containing Hexachlorophene synthesized from pre-purified 2,4,5-trichlorophenol as the sole component.

*F0281

Residues resulting from the incineration or thermal treatment of soil contaminated with Hazardous Waste Numbers F020, F021, F023, F026 and F027.

*F032

Wastewaters, process residuals, preservative drippage and spent formulations from wood preserving processes generated at plants that currently use or have

Hazardous Waste No.

Description of Hazardous Waste

previously used chlorophenolic formulations (except potentially cross-contaminated wastes that have had the F032 waste code deleted in accordance with Section 721.135 and where the generator does not resume or initiate use of chlorophenolic formulations). This listing does not include K001 bottom sediment sludge from the treatment of wastewater from wood preserving processes that use creosote or pentachlorophenol.

F034

Wastewaters, process residuals, preservative drippage and spent formulations from wood preserving processes generated at plants that use creosote formulations. This listing does nto include K001 bottom sediment sludge from the treatment of wastewater from wood preserving processes that use creosote or pentachlorophenol.

F035

Wastewaters, process residuals, preservative drippage and spent formulations from wood preserving processes generated at plants that use inorganic preservatives containing arsenic or chromium. This listing does not include K001 bottom sediment sludge from the treatment of wastewater from wood preserving processes that use creosote or pentachlorophenol.

F037

Petroleum refinery primary oil/water/solids separation sludge -- Any sludge generated from the gravitational separation of oil/water/solids during the storage or treatment of process wastewaters and oil cooling wastewaters from petroleum refineries. Such sludges include, but are not limited to, those generated in: oil/water/solids separators; tanks and impoundments; ditches and other conveyances; sumps; and stormwater units receiving dry weather flow. Sludges generated in stormwater units that doe not receive dry weather flow, sludges generated in aggressive biological treatment units as defined in subsection (b)(2) (including sludges generated in one or more additional units after wastewaters have been treated in aggressive biological treatment units) and K051 wastes are not included in this listing.

F038

Petroleum refinery secondary (emulsified) oil/water/solids separation sludge -- Any sludge or float generated from the physical or chemical separation of oil/water/solids in process wastewaters and oily cooling wastewaters from the physical or chemical separation of oil/water/solids in process wastewaters and oil cooling wastewaters from petroleum refineries. Such wastes include, but are not limited to, all sludges and floats generated in: induced air flotation (IAF)

Hazardous

Waste No.

Description of Hazardous Waste

units, tanks and impoundments, and all sludges generated in DAF units. Sludges generated in stormwater units that do not receive dry weather flow, sludges generated in aggressive biological treatment units as defined in Subsection (b)(2) (including sludges generated in one or more additional units after wastewaters have ben treated in aggressive biological treatment units), F037, K048 and K051 wastes are not included in this listing.

F039

Leachate resulting from the treatment, storage or disposal of wastes classified by more than one waste code under Subpart D, or from a mixture of wastes classified under Subparts C and D. (Leachate resulting from the management of one or more of the following USEPA hazardous wastes and no other hazardous wastes retains its hazardous waste code(s): F020, F021, F022, F023, F026, F027 or F028.)

C. Hazardous Wastes From Specific Sources

K001	Bottom sediment sludge from the treatment of wastewaters from wood preserving processes that use creosote and/or pentachlorophenol.
K002	Wastewater treatment sludge from the production of chrome yellow and orange pigments.
K003	Wastewater treatment sludge from the production of molybdate orange pigments.
K004	Wastewater treatment sludge from the production of zinc yellow pigments.
K005	Wastewater treatment sludge from the production of chrome green pigments.
K006	Wastewater treatment sludge from the production of chrome oxide green pigments (anhydrous and hydrated).
K007	Wastewater treatment sludge from the production of iron blue pigments.
K008	Oven residue from the production of chrome oxide green pigments.
K009	Distillation bottoms from the production of acetaldehyde from ethylene.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
K010	Distillation side cuts from the production of acetaldehyde from ethylene.
K011	Bottom stream from the wastewater stripper in the production of acrylonitrile.
K013	Bottom stream from the acetronitrile column in the production of acylonitrile.
K014	Bottoms from the acetontrile purification column in the production of acrylonitrile.
K015	Still bottoms from the distillation of benzyl chloride.
K016	Heavy ends or distillation residues from the production or carbon tetrachloride.
K017	Heavy ends (still bottoms) from the purification column in the production of epichlorohydrin.
K018	Heavy ends from the fractionation column in ethyl chloride production.
K019	Heavy ends of the distillation of ethylene dichloride in thylene dichloride production.
K020	Heavy ends from the distillation of vinyl chloride in vinyl chloride monomer production.
K021	Aqueous spent antimony catalyst waste from fluoromethanes production.
K022	Distillation bottom tars from the production of phenol/acetone from cumene.
K023	Distillation light ends from the production of phthalic anhydride from naphthalene.
K024	Distillation bottoms from the production of phthalic anhydride from naphthalene.
K025	Distillation bottoms from the production of phthalic anhydride from naphthalene.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
K026	Stripping still tails from the production of methy ethyl pyridines.
K027	Centrifuge and distillation residues from toluene diisocyanate production.
K028	Spent catalyst from the hydrochlorinator reactor in the production of 1,1,1-trichlorethane.
K029	Waste from the product stream stripper in the production of 1,1,1-trichloroethane.
K030	Column bottoms or heavy ends from the combined production of trichlorethylene and perchloroethylene.
K031	By-product salts generated in the production of MSMA and cacodylic acid.
K032	Wastewater treatment sludge from the production of chlordane.
K033	Wastewater and scrub water from the chlorination of cyclopentadiene in the production of chlordane.
K034	Filter solids from the filtration of hexachlorocyclopentadiene in the production of chlordane.
K035	Wastewater treatment sludges generated in the production of creosote.
K036	Still bottoms from toluene reclamation distillation in the production of disulfoton.
K037	Wastewater treatment sludges from the production of disulfoton.
K038	Wastewater from the washing and stripping of phorate production.
K039	Filter cake from the filteration of diethylphosphorodithioic acid in the production of phorate.
K040	Wastewater treatment sludge from the production of phorate.

Hazardous	
Waste No.	Description of Hazardous Waste
K041	Wastewater treatment sludge from the production of toxaphene.
K042	Heavy ends or distillation residues from the distillation of tetrachlorobenzene in the production of 2,4,5-T.
K043	2,6-Dichlorophenol waste from the production of 2,4-D.
K044	Wastewater treatment sludges from the manufacturing and processing of explosives.
K045	Spent carbon from the treatment of wastewater containing explosives.
K046	Wastewater treatment sludges from the manufacturing, formulation and loading of lead based initiating compounds.
K047	Pink/red water from TNT operations.
K048	Dissolved air flotation (DAF) float from the petroleum refining industry.
K049	Slop oil emulsion solids from the petroleum refining industry.
K050	Heat exchanger bundle cleaning sludge from the petroleum refining industry.
K051	API separator sludge from the petroleum refining industry.
K052	Tank bottoms (leaded) from the petroleum refining industry.
K060	Ammonia still lime sludge from coking operations.
K061	Emission control dust/sludge from the primary production of steel in electric furnaces.
K062	Spent pickle liquor generated by steel finishing operations of facilities within the iron and steel industry (SIC Codes 331 and 332) (as defined in 35 Ill. Adm. Code 720.110).

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
K064	Acid plant blowdown slurry or sludge resulting from the thickening of blowdown slurry from primary copper production.
K065	Surface impoundment solids contained in and dredged from surface impoundments at primary lead smelting facilities.
K066	Sludge from treatment of process wastewater or acid plant blowdown from primary zinc production.
K069	Emission control dust/sludge from secondary lead smelting.
K071	Brine purification muds from the mercury cell process in chlorine production, where separately pre-purified brine is not used.
K073	Chlorinated hydrocarbon waste from the purification step of the diaphram cell process using graphite anodes in chlorine production.
K083	Distillation bottoms from aniline production.
K084	Wastewater treatment sludges generated during the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds.
K085	Distillation or fractionation column bottoms from the production of chlorobenzenes.
K085	
	chlorobenzenes. Solvent washes and sludges, caustic washes and sludges, or water washes and sludges from cleaning tubs and equipment used in the formulation of ink from
K086	Solvent washes and sludges, caustic washes and sludges, or water washes and sludges from cleaning tubs and equipment used in the formulation of ink from pigments, driers, soaps and stabilizers containing chromium and lead.
K086 K087	Solvent washes and sludges, caustic washes and sludges, or water washes and sludges from cleaning tubs and equipment used in the formulation of ink from pigments, driers, soaps and stabilizers containing chromium and lead. Decanter tank tar sludge from coking operations.

<u>Hazardous</u> Waste No.	Description of Hazardous Waste
waste ivo.	Description of Hazardous waste
K093	Distillation light ends from the production of phthalic anhydride from ortho-xylene.
K094	Distillation bottoms from the production of phthalic anhydride from ortho-xylene.
K095	Distillation bottoms from the production of 1,1,1-trichloroethane.
K096	Heavy ends from the heavy ends column from the production of 1,1,1-trichloroethane.
K097	Vacuum stripper discharge from the chlordane chlorinator in the production of chlordane.
K098	Untreated process wastewater from the production of toxaphene.
K099	Untreated wastewater from the production of 2,4-D.
K100	Waste leaching solution from acid leaching of emission control dust/sludge from secondary lead smelting.
K101	Distillation tar residues from the distillation of aniline-based compounds in the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds.
K102	Residue from the use of activated carbon for decolorization in the production of veterinary pharmaceuticals from arsenic compounds.
K103	Process residues from aniline extraction from the production of aniline.
K104	Combined wastewater streams generated from nitrobenzene/aniline production.
K105	Separated aqueous stream from the reactor product washing step in the production of chlorobenzenes.
K106	Wastewater treatment sludge from the mercury cell process in chlorine production.

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
K107	Column bottoms from product separation from the production of 1,1-dimethylhydrazine (UDMH) from carboxylic acid hydrazines.
K108	Condensed column overheads from product separation and condensed reactor vent gases from the production of 1,1-dimethylhydrazine (UMDH) from carboxylic acid hydrazines.
K109	Spent filter cartridges from product purification from the production of 1,1-dimethylhydrazine (UMDH) from carboxylic acid hydrazines.
K110	Condensed column overheads from intermediate separation from the production of 1,1-dimethylhydrazine (UMDH) from carboxylic acid hydrazines.
K111	Product washwaters from the production of dinitrotoluene via nitration of toluene.
K112	Reaction by-product water from the drying column in the production of toluenediamine via hydrogenation of dinitrotoluene.
K113	Condensed liquid light ends from the (T) purification of toluenediamine in the production of toluenediamine via hydrogenation dinitrotoluene.
K114	Vicinals from the purification of toluenediamine in the production of toluenediamine via hydrogenation of dinitrotoluene.
K115	Heavy ends from the purification of toluenediamine in the production of toluenediamine via hydrogenation of dinitrotoluene.
K116	Organic condensate from the solvent recovery column in the production of toluene diisocyanate via phosgenation of toluenediamine.
K117	Wastewater from the reactor vent gas scrubber in the production of ethylene dibromide via bromination of ethene.
K118	Spent absorbent solids from purification of ethylene dibromide in the production of ethylene dibromide via bromination of ethene.

Hazardous		
Waste No.	Description of Hazardous Waste	
K123	Process wastewater (including supernates, filtrates, and wash waters) from production of ethylenebisdithiocarbamic acid and its salts.	the
K124	Reactor vent scrubber water from the production of ethylene-bisdithiobarba acid and its salts.	mic
K125	Filtration, evaporation, and centrifugation of solids from the production of ethylenebisdithio carbonic acid and its salts.	
K126	Baghouse dust and floor sweepings in milling and packaging operations from production or formulation of ethylenebisdithiocarbamic acid and its salts.	m
K131	Wastewater from the reactor and spent sulfuric acid from the acid dryer from production of methyl bromide.	n the
K132	Spent absorbent and wastewater separator solids form the production of met bromide.	hyl
K136	Still bottoms from the purification of ethylene dibromide in the production of ethylene dibromide via bromination of ethene.	of
K140	Floor sweepings, off-specification product and spent filter media from the production of 2,4,6-tribromophenol.	
K141	Process residues from the recovery of coal tar, including, but not listed to, ta collecting sump residues from the production of coke from coal or the recov of coke by-products produced from coal. This listing does not include K087 (decanter tank tar sludge from coking operations).	ery
K142	Tar storage tank residues from the production of coke from coal or from the recovery of coke by-products produced from coal. This listing does not incl K087 (decanter tank tar sludge from coking operations).	
K143	Process residues from the recovery of light oil, including, but not limited to, those generated in stills, decanters, and wash oil recovery units from the recovery of coke by-products produced from coal.	

Ungardona	
<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
K144	Wastewater treatment sludges from light oil refining, including, but not limited to, intercepting or contamination sump sludges from the recovery of coke by-products produced from coal.
K145	Residues from napthalene collection and recovery operations from the recovery of coke by-products produced from coal.
K147	Tar storage tank residues from coal tar refining.
K148	Residues from coal tar distillation, including, but not limited to, still bottoms.
K149	Distillation bottoms from the production of alpha- (or methyl-) chlorinated toluenes, ring-chlorinated toluenes, benzoyl chlorides, and compounds with mixtures of these functional groups. [This waste does not include still bottoms from the distillation of benzyl chloride.]
K150	Organic residuals, excluding spent carbon adsorbent, from the spent chlorine gas and hydrochloric acid recovery processes associated with the production of alpha- (or methyl-) chlorinated toluenes, ring-chlorinated toluenes, benzoyl chlorides, and compounds with mixtures of these functional groups.
K151	Wastewater treatment sludges, excluding neutralization and biological sludges, generated during the treatment of wastewaters from the production of alpha- (or methyl-) chlorinated toluenes, ring-chlorinated toluenes, benzoyl chlorides, and compounds with mixtures of these functional groups.
K156	Organic waste (including heavy ends, still bottoms, light ends, spent solvents, filtrates, and decantates) from the production of carbamates and carbamoyl oximes.
K157	Wastewaters (including scrubber waters, condenser waters, washwaters, and separation waters) from the production of carbamates and carbamoyl oximes).
K158	Bag house dust, and filter/separation solids from the production of carbamates and carbamoyl oximes.
K159	Organics from the treatment of thiocarbamate wastes.
•	

Hazardous

TT1	
<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
K161	Purification solids (including filtration, evaporation, and centrifugation solids), bag house dust, and floor sweepings from the production of dithiocarbamate acids and their salts. (This listing does not include K125 or K126).
K169	Crude oil storage tank sediment from petroleum refining operations.
K170	Clarified slurry oil storage tank sediment and/or in-line filter/separation solids from petroleum refining operations.
K171	Spent hydrotreating catalyst from petroleum refining operations, including guard beds used to desulfurize feeds to other catalytic units (not including inert support media).
K172	Spent hydrorefining catalyst from petroleum operations, including guard beds used to desulfurize feeds to other catalytic units (not including inert support media).
*K174	Wastewater treatment sludge from the production of ethylene dichloride or vinyl chloride monomer.
K175	Wastewater treatment sludge from the production of ethylene dichloride or vinyl chloride monomer.
K181	Non-wastewater from the production of dyes and/or pigments.

D. Discarded Commercial Chemical Products, Off-Specification Species, Container Residues, and Spill Residues Thereof:

Waste 1	No. Description of Hazardous Waste
P001	Warfarin, when present at concentrations greater than 0.3%.
P002	1-Acetyl-2-thiourea
P003	Acrolein
P004	Aldrin
P005	Allyl alcohol
P006	Aluminum phosphide
P007	5-(Aminomethyl)-3-isoxazolol

<u>Hazardous</u> <u>Waste No.</u>

P008	4-Aminopyridine
P009	Ammonium picrate
P010	Arsenic acid
P011	Arsenic pentoxide
P012	Arsenic trioxide
P013	Barium cyanide
P014	Benzenethiol
P015	Beryllium dust
P016	Bis-chloromethyl) ether
P017	Bromoacetone
P018	Brucine
P020	Dinoseb
P021	Calcium cyanide
P022	Carbon bisulfide
P023	Chloroacetaldehyde
P024	p-Chloroaniline
P026	1-(o-Chlorophenyl) thiourea
P027	3-Chloropropionitrile
P028	Benzyl chloride
P029	Copper cyanides
P030	Cyanides (soluble cyanide salts) not elsewhere specified.
P031	Cyanogen
P033	Cyanogen chloride
P034	4,6-Dinitro-o-cyclohexylphenol
P036	Dichlorophenylarsine
P037	Dieldrin
P038	Diethylarsine
P039	Disulfoton
P040	O,O-Diethyl O-pyrazinyl phosphoro-thioate
P041	Diethyl-p-nitrophenyl phosphate
P042	Epinephrine
P043	Diisopropyl fluorophosphate
P044	Dimethoate .
P045	Thiofanox
P046	Ethanamine, 1,10dimethyl-2-phenyl-
P047	4,6-Dinitro-o-cresol and salts
P048	2,4-Dinitrophenol
P049	2,4-Dithiobiuret
	·

Description of Hazardous Waste

Hazardous Waste No. Description of Hazardous Waste P050 Endosulfan P051 Endrin P054 Ethylenimine

P056 Fluorine P057 Fluoroacetamide

P058 Fluoroacetic acid, sodium salt

P059 Heptachlor

P060 Hexachlorohexahydro-endo, endo-dimethanonaphthalene

P062 Hexaethyl tetraphosphate

P063 Hydrogen cyanide P064 Methyl Isocyanate P065 Mercury fulminate

P066 Methomyl

P067 2-Methylaziridine P068 Methyl hydrazine

P069 2-Methyllactonitrile

P070 Aldicarb

P071 Methyl parathion

P072 alpha-Naphthylthiourea

P073 Nickel carbonyl P074 Nickel cyanide

P075 Nicotine and salts

P076 Nitric oxide P077 p-Nitroaniline P078 Nitrogen dioxide P081 Nitroglycerine

P082 N-Nitrosodimethylamine
 P084 N-Nitrosomethylvinylamine
 P085 Octamethylpyrophosphoramide

P087 Osmium oxide P088 Endothall

P089 Parathion P092 Phenylmercuric acetate

P093 N-Phenylthiourea

P094 Phorate P095 Phospene P096 Phosphine

Hazardous Waste No.

P097	Pamphur
P098	Potassium cyanide
P099	Potassium silver cyanide
P101	Propanenitrile
P102	Propargyl alcohol
P103	Selenourea
P104	Silver cyanide
P105	Sodium azide
P106	Sodium cyanide
P108	Strychnine and salts
P109	Tetraethyldithiopyrophosphate
P110	Tetraethyl lead
P111	Tetraethylpyrophosphate
P112	Tetranitromethane
P113	Thallic oxide
P114	Thallium(1) selenide
P115	Thallium(1) sulfate
P116	Thiosemicarbazide
P118	Trichloromethanethiol
P119	Vanadic acid, ammonium salt
P120	Vanadium pentoxide
P121	Zinc cyanide
P122	Zinc phosphide
P123	Toxaphene
P127	7-Benzofuranol, 2,3-dihydro-2,2-dimethyl-, methylcarbamate
P128	Phenol, 4-(dimethylamino)-3,5-dimethyl-, methylcarbamate (ester)
P185	1,3-Dithiolane-2-carboxaldehyde, 2,4-dimethyl
	0-[(methylamino)carbonyl]oxime
P188	Benzoic acid, 2-hydroxy, compound with (3aS-cis)-
	1,2,3,3a,8,8a-hexahydro-1,3a,8-trimethylpyrrolo
	[2,3-b]indol-5-yl methylcarbamate ester (1:1)
P189	Carbamic acid, [(dibutylamino)thos]methyl-,
	2,3-dihydro-2,2-dimethyl-7-benzofuranyl ester
P190	Carbamic acid, methyl-, 3-methylphenyl ester
P191	Carbamic acid, dimethyl-, 1-[(dimethylamino
	carbonyl]-5-methyl-1H-pyrazol-3-yl ester

Description of Hazardous Waste

Hazardo	<u>us</u>
Waste N	o. <u>Description of Hazardous Waste</u>
D100	
P192	Carbamic acid, dimethyl-, 3-methyl-1-
	(1-methylethyl)-1H-pyrazol-5-yl ester
P194	Ethanimidothioc acid, 2-(dimethylamino)-N-[[(methylamino)
	carbonyl)oxy]-2-oxo-, methyl ester
P196	Manganese, bis(dimethylcarbamodithioato-S,S=)-,
	Manganese dimethyldithiocarbamate
P197	Methanimidamide, N,N-dimethyl-N=-
	[2-methyl-4[[(methylamino)carbony]phenyl]-
P198	Methanimidamide, N,N-dimethyl-N=-[3-[[(methylamino)
	carbonyl]oxylphenyl]-, monohydrochloride
P199	Phenol, (3,5-dimethyl-4-(methylthio)-, methylcarbamate
P201	Phenol, 3-methyl-5-(1-methylethyl)-, methyl carbamate
P202	Phenol, 3-(1-methylethyl)-, methyl carbamate
	3-lsopropylphenyl N-meethylcarbamate orm-Cumenyl
	methylcarbamate
P203	Propanal, 2-methyl-2-(methysulfonyl)-,
	0-[(methylamino)carbonyl] oxime
P204	Pyrrolo[2,3-b]indol-5-ol, 1,2,3,3a,8,8a-hexahydro-1,
	3a,8-trimethyl-, methylcarbamate (ester), 3aS-cis)-
P205	Zinc, bis(dimethylcarbamodithioato-S,S=)-, (T-4)-

E. Commercial Chemical Products, Manufacturing Chemical Intermediates, or Off-Specification Commercial Chemical Products:

Hazardous Waste No.	Description of Hazardous Waste
U001	Acetaldehyde
U002	Acetone
U003	Acetonitrile
U004	Acetophenone
U005	2-Acetylaminofluorene
U006	Acetyl chloride
U007	Acrylamide
U008	Acrylic acid
U009	Acrylonitrile
U010	Mitomycin C

<u>Hazardous</u> Waste No.	Description of Hazardous Waste
U011	Amitrole
U012	Aniline
U014	Auramine
U015	Azaserine
U016	Benz(c)acridine
U017	Benzal chloride
U018	Benz(a)anthracene
U019	Benzene
U020	Benzenesulfonyl chloride
U021	Benzidine
U022	Benzo(a)pyrene
U023	Benzotrichloride
U024	Bis(2-chloroethyoxy) methane
U025	Dichloroethyl ether
U026	Chloronaphazine
U027	Bis(2-chloroisopropyl) ether
U028	Bis(2-ethylhexyl) phthalate
U029	Bethyl bromide
U030	Benzene, 1-bromo-4-phenoxy-
U031	N-Butyl alcohol
U032	Calcium chromate
U033	Carbonyl fluoride
U034	Chloral
U035	Chlorambucil
U036	Chlordane, technical
U037	Chlorobenzene
U038	Ethyl 4,4'-dichlorobenzilate
U039	4-Chloro-m-cresol
U041	1-Chloro-2,3-epoxypropane
U042	2-Chloroethyl vinyl ether
U043	Vinyl chloride
U044	Chloroform
U045	Methyl chloride
U046	Chloromethyl methyl ether
U047	beta-Chloronaphthalene
U048	o-Chlorophenol
U049	Benzenamine, 4-chloro-2-methyl-

Hazardous	
Waste No.	Description of Hazardous Waste
	
U050	Chrysene
U051	Creosote
U052	Cresols
U053	Crotonaldehyde
U055	Cumene
U056	Cyclohexane
U057	Cyclohexanone
U058	Cyclophosphamide
U059	Daunomycin
U060	DDD
U061	DDT
U062	Diallate
U063	Dibenz[a,h]anthracene
U064	Dibenz[a,i]pyrene
U066	1,2-Dibromo-e-chloropropane
U067	Ethylene dibromide
U068	Methylene bromide
U069	Dibutyl phthalate
U070	o-Dichlorobenzene
U071	m-Dichlorobenzene
U072	p-Dichlorobenzene
U073	3-3'Dichlorobenzidine
. U074	1,4-Dichloro-2-butene
U075	Dichlorodifluoromethane
U076	Ethylidene dichloride
U077	Ethylene dichloride
U078	1,1-Dichloroethylene
U079	1,2-Dichloroethylene
U080	Methylene chloride
U081	2,4-Dichlorophenol
U082	2,6-Dichlorophenol
U083	1,2-Dichloropropane
U084	1,3-Dichloropropane
U085	1,2:3,4-Diepoxybutane
U086	N,N-Diethylhydrazine
U087	o,o-Diethyl-S-methyl-dithiophosphate
U088	Diethyl phthalate

<u>Hazardous</u>	•
Waste No.	Description of Hazardous Waste
•	
U089	Diethylstilbestrol
U090	Dihydrosafrole
U091	3,3'-Dimethoxybenzidine
U092	Dimethylamine
U093	Dimethylaminoazobenzene
U094	7,12-Dimethylbenz[a]anthracene
U095	3,3'-Dimethylbenzidine
U096	Alpha,alpha-Dimethylbenzyhlydro-peroxide
U097	Dimethylcarbamoyl chloride
U098	1,1-Dimethylhydrazine
U099	1,2-Dimethylhydrazine
U101	2,4-Dimethylphenol
U102	Dimethyl phthalate
U103	Dimethyl sulfate
U105	2,4-Dinitrotoluene
U106	2,6-Dinitrotoluene
U107	Di-n-octyl phthalate
U108	1,4-Dioxane
U109	1,2-Diphenylhydrazine
U110	Dipropylamine
U111	Di-N-propylnitrosamine
U112	Ethyl acetate
U113	Ethyl acrylate
U114	Ethylenebis(dithiocarbamic acid), salts and esters
U115	Ethylene oxide
U116	Ethylene thiourea
U117	Ethyl ether
U118	Ethyl methacrylate
U119	Ethyl methanseulfonate
U120	Fluoranthene
U121	Metane, trichlorofluoro-
U122	Formaldehyde
U123	Formic acid
U124	Furan
U125	Furfural
U126	Glycidylaldehyde
U127	Hexachlorobenzene
~ · · ·	2

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
U128	Hexachlorobutadene
U129	Lindane
U130	Hexachlorcyclopentadene
U131	Hexachloroethane
U132	Hexachlorophene
U133	Hydrazine
U134	Hydrogen fluoride
U135 ·	Hydrogen sulfide
U136	Cacodylic acid
U137	Indeno[1,2,3-cd]pyrene
U138	Iodomethane
U140	Isobutyl alcohol
U141	Isosafrole
U142	Kepone
U143	Lasiocarpine
U144	Lead acetate
U145	Lead phosphate
U146	Lead subacetate
U147	Maleic anhydride
U148	Maleic hydrazide
U149	Malononitrile
U150	Melphalan
U151	Mercury
U152	Methacrylonitrile
U153	Methanethiol
U154	Methanol
U155	Methapyrilene(T)
U156	Methyl chlorocarbonate
U157	3-Methylchlolanthrene
U158	4,4'-Methylenebis(2-chloroaniline)
U159	Methyl ethyl ketone
U160	Methyl ethyl ketone peroxide
U161	Methyl isobutyl ketone
U162	Methyl methacrylate
U163	N-methyl-N'nitro-N-nitrosoquanidine
U164	Methylthiouracil
U165	Napthalene

Hazardous	
Waste No.	Description of Hazardous Waste
<u> </u>	Dobbilphon of Hazardoub *** abto
U166	1,4-Naphthalenedione
U167	1-Naphthylamine
U168	2-Naphthylamine
U169	Nitrobenzene
U170	p-Nitrophenol
U171	2-Nitropropane
U172	N-Nitrosodi-n-butylamine
U173	N-Nitrosodiethanolamine
U174	N-Nitrosodiethylamine
U176	N-Nitroso-N-ethylurea
U177	N-Nitroso-N-methylurea
U178	N-Nitroso-N-methylurethane
.U179	N-Nitrosopiperidine
U180	Nitrosopyrrolidine
U181	5-Nitro-o-toluidine
U182	Paraldehyde
U183	Pentachlorobenzene
.U184	Pentachloroethane
U185	Pentachloronitrobenzene
U186	1,3-Pentadiene
U187	Phenacetin
U188	Phenol
U189	Phosphorous sulfide
U190	Phthalic anhydride
U191	Pyridine, 2-methyl-
U192	Pronamide
U193	1,3-Propane sultone
U194	1-Propanamine
U196	Pyridine
U197	p-Benzoquinon
U200	Reserpine
U201	Resorcinol
U202	Saccharin and salts
U203	Safrole
U204	Selenium dioxide
U205	Selenium disulfide
U206	Streptozotocin

<u>Hazardous</u>	
Waste No.	Description of Hazardous Waste
U207	1,2,4,5-Tetrachlorobenzene
U208	1,1,1,2,-Tetrachloroethane
U209	1,1,2,2,-Tetrachloroethane
U210	Tetrachloroethylene
U211	Carbon tetrachloride
U213	Tetrahydrofuran
U214	Thallium(I) acetate
U215	Thallium(l) carbonate
U216	Thallium(l) chloride
. U217	Thallium(l) nitrate
U218	Thioacetamide
U219	Thiourea
U220	Toluene
U221	Toluenediamine
U222	o-Toluidine hydrochloride
U223	Toluene hydrochloride
U225	Bromoform
U226	1,1,1-Trichloroethane
U227	1,1,2-Trichloroethane
U228	Trichloroethene
U234	sym-Trinitrobenzene
U235	Tris(2,3-dibromopropyl) phosphate
U236	Trypan blue
U237	Uracil mustard
U238	Ethyl carbarmate (urethan)
U239	Xylene
U240	2,3-D, salts and esters
U243	Hexachloropropene
U244	Thiram
U246	Bromine cyanide
U247	Methoxychlor
U248	Warfarin, when present at concentrations of 0.3% or less
U249	Zinc phosphide, when present at concentrations of 10% or less
U271	Carbamic acid, [1-[(butylamino)carbonyl]-1H-
	benzimidazol-2-yl]-, methyl ester
U278	1,3-Benzodioxol-4-ol, 2,2-dimethyl-, methyl carbamate
U279	1-Naphthalenol, methylcarbamate

<u>Hazardous</u> <u>Waste No.</u>	Description of Hazardous Waste
U280	Carbamic acid, (3-chlorophenyl)-, 4-chloro-2-butynyl ester
U328	o-Toluidine
U353	p-Toluidine
U359	Ethylene glycol monoethyl ether
U364	1,3-Benzodioxol-4-ol, 2,2-dimethyl-,
U367	7-Benzofuranol, 2,3-dihydro-2,2-dimethyl-
U372	Carbamic acid, 1 H-benzimidazol-2-yl, methyl ester
U373	Carbamic acid, phenyi-, 1 -methylethyl ester
U387	Carbamothioic acid, dipropyl-, S-(phenylmethyl) ester
U389	Carbamothioic acid, bis(1-methylethyl)-
	S-(2,3,3-trichloro-2-propenyl) ester
U394	Ethanimidothioic acid, 2-(dimethylamino)-N-hydroxy-2-oxo-, methyl ester
U395	Ethanol, 2,2'-oxybis-, discarbamate
U404	Ethanamine, N,N-diethyl-
U409.	Carbamic acid, [1,2-phenylenebis(iminocarbonothioyl)]bis,
	dimethyl ester
U410	Ethanimidothioc acid, N,N=-
	[thiobis(methylimimo)carbonyloxy]bis-,dimethyl ester
U411	Phenol, 2-(1-methylethoxy)-, methylcarbamate

SFN:WRW:bjh\051161s.doc

^{*}These hazardous waste codes are permitted only for storage and transfer, not fuel blending.

¹These hazardous waste codes are not permitted for shredding.

²These hazardous waste codes are the only codes permitted for lamp crushing.

ATTACHMENT B

INSPECTION SCHEDULE

LPC 0316000051

Clean Harbors Svcs Inc

RCRA Log No. 16R

Table I: General Inspection Schedule Security Devices

<u>ITEM</u> Fence	INSPECTION ELEMENT/TYPE OF PROBLEM Inspect entire perimeter for breaches or damage	INSPECTION FREQUENCY Daily
Gates	Check for proper gate lock function	Daily
Warning Signs	. Check for presence of warning signs	Daily
Lighting System (indoor/outdoor)	Check lights for operability	Daily
Lighting System (Emergency)	. Check lights for operability	Monthly

Table II: General Inspection Schedule, Safety & Emergency Equipment

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Protective Gear (e.g., Helmets, Face	Check accessibility	Daily
Shields, Goggles, Boots, Gloves, Acid	. Check for adequate supply	Daily
Resistant Clothing, Disposable Suits, Disposable Bags)	Check for deterioration, damage	Daily
Breathing Apparatus	. Check for accessibility	Daily
	. Check for adequate supply, full charge on canisters, and all air tanks	Daily
	. Check for deterioration and damage	Daily

Page B-2 of B-10

<u>ITEM</u>	IN	SPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Breathing Apparatus (continued)		Check for function	Monthly
First Aid Kits	-	Check accessibility	Daily
		Check for adequate supply	Daily
Emergency Showers	• .	Check that units activate and shut off properly	Daily
· ·	.'	Check accessibility	Daily
Water Lines		Check for adequate pressure	Monthly
Internal (Phone or Radio)/External		Check accessibility	Daily
(Phone) Communications Systems		Check for operations	Daily
		Test cellular phones	Monthly
Fire Extinguishers	•	Check pressure gauge for full charge indication	Monthly
		Check inspection tag to insure annual maintenance by outside fire service is up-to-date	Monthly
	-	Check seal to ensure no one has used extinguisher	Monthly
	٠	Check to ensure access to units is not blocked	Daily

systems, fire pumps,

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Fire Suppression	. Check for accessibility	Daily
System (Monitors, Pull Stations, Alarms)	Test fire alarm warning systems	Monthly
	Test Foam Supply	Annually
Absorbent Supply	. Check for adequate supply	Daily
Recovery Drums	Check for adequate supply	Daily
Other Emergency and	Check accessibility	Daily
Decontamination Equipment	. Check for adequate supply	Daily
	. Check for deterioration/damage	Daily
Respirators and Cartridges	Check for adequate supply	Daily
Fire Suppression System	Verify lack of combustible material and arrangement of room (e.g. unobstructed aisles) in the following valve rooms:	Daily
	a. Shed west of truck scale;	
	b. Shed at northeast corner of truck farm; and	
	c. Shed east of Unit 61.	
Water based fire suppression systems including sprinklers, monitors, foam water sprinkler systems, foam water deluge systems, foam maker suppression	Inspect and test these items in accordance with the requirements, protocols, and frequencies specified in the current editions of NFPA 11, NFPA 16, NFPA 16A, NFPA 20, NFPA 22, NFPA 24 and NFPA 25	At Least Annually

ITEM

INSPECTION ELEMENT/TYPE OF PROBLEM

INSPECTION FREQUENCY

water supply, storage tanks, underground piping, and foam concentrate supply and proportioning systems.

Fire alarm and detection system, including all detection devices Inspect and test these items in accordance with the requirements, protocols and frequencies specified in the current edition of NFPA72.

At Least Annually

Foam Proportioning System

The system must be inspected by manufacturer's representative in conjunction with form concentrate testing to verify that there is no unusual interaction between the form concentrate and foam proportioning equipment. The permittee must report any degradation of the system to IEPA. The permittee must make arrangements to resolve any deficiencies for both the short term and log term operation of the facility.

Annually

All fire protection Equipment and Systems The permittee must compare future test results for all fire protection equipment and systems to the data obtained during the 1995 acceptance testing, and document the comparison. The permittee must report any discrepancies to IEPA. The permittee must resolve the discrepant condition or provide an explanation as to the nature of the discrepancy and proposed solution, and report to IEPA.

Annually

Table III: Tank Farm Inspection Schedule

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Storage Tanks Containment Area	Check for evidence of spilled materials on floor and collection sump	Daily
	Check for cracks and gaps in, or damage to containment base, sumps and drains, and their coatings.	Daily
	Check for evidence of seepage outside containment (e.g. discoloration)	Daily
	Check for debris, cleanup residue, improperly stored equipment	Daily
Storage Tanks	Inspect tank exterior for cracks, leaks, discoloration, and obvious deformation	Daily
	Check tank integrity	Annually
Access Hatches, Vents, and Sampling	Check for leaks	Daily
Ports	. Check for damage	Daily
Fill/Drain and Overflow Piping	Inspect piping, elbows, sampling ports, gauge taps, etc. for leaks and corrosion	Daily
	. Inspect valve seals for leaks	Daily
	Check that handles are not bent or damaged	Daily
	Inspect heat tracing lines for signs of deterioration or damage	Daily

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Liquid Levels Monitors	. Check if operators log book is up to date	Daily
	Check tank liquid level indicators for operability	Daily
	. Check containment sump liquid level indicators for operability	Daily
All Ancillary Equipment (e.g.	Visual inspection for leaks and corrosion	Daily
pumps, filter baskets, manifolds)	. Conduct leak test or approved integrity assessment	Annually
Control/Monitoring Equipment	Maintenance inspection - Tank Level Monitors - Containment Sump Floats - High/Low Level Alarms - High/Low Pressure Switches and Alarms - Nitrogen Blanket Supply System	Per mfg. recommen- dations, but at least monthly
Flame Arrestors, Conservation Vents, Emergency Vents	. Check for obstruction or other damage	Annually
Carbon Absorption Canisters	Check that units are functional and that valves are properly positioned	Daily
	Check carbon bed for organic breakthrough	Daily
Tank Truck Loading/ Unloading Area	Check for evidence of spills or releases in unloading area	Daily
	Check for removal of spill absorbent and cleanup materials	Daily

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Tank Truck Loading/ Unloading Area (continued)	Check sump, grating and curbs for cracks or other damage	Daily
(continued)	Inspect hoses for deterioration or leakage	Daily
	. Inspect hose couplings and valves for leakage	Daily
	. Inspect containment system for deterioration	Daily
	. Inspect grounding system equipment for operability	Daily

Table IV: Container Storage Area Inspection Schedule

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Container Storage Area	Check for evidence of spilled material on slab, ramps, drains, sumps	Daily
	. Check for removal of absorbent materials and cleanup rags	Daily
	Check for, cracks and gaps in, or damage to, containment bases, sump and drains and coatings	Daily
	Check for erosion, uneven settlement, etc.	Daily
	Check for corrosion of grating over drains and sumps	Daily

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Container Storage Area (continued)	Check for condition and availability of overpack containers	Monthly
Stored Containers	Check for drums being in good condition	Daily
	. Check that drums are not open	Daily
	. Check for proper placement	Daily
	. Check adequacy of aisle space	Daily
•	Check height of stacks	Daily
	Check storage capacity not exceeded	Daily
	Check for proper labeling	Daily
Container Loading/ Unloading Area	. Check for damaged containers	Daily
	. Check for evidence of spilled material on slab and ramps used	Daily
	. Check for removal of used absorbent and cleaning materials	Daily
	. Check for prompt container removal from receiving area	Daily
	Inspect grounding system equipment for operability	Daily
	. Check forklifts for proper operation and accumulation of residue	Each Operating Shift

ITEM	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Containers from the Pegasus System	Inspect ten (10) consecutive containers prior to crushing to insure that they are RCRA empty	Monthly or per the schedule submitted as part of the comments on the draft permit dated 6/3/95

Table V: Miscellaneous Unit Area Inspection Schedule

<u>ITEM</u>	INSPECTION ELEMENT/TYPE OF PROBLEM	INSPECTION FREQUENCY
Miscellaneous Unit	Inspect unit for leaks visually	Daily when unit in use
	Inspect unit for leaks (emissions) visually (shredder and compactor only)	Annually
Control/Monitoring Equipment	Flow indicator sensor pressure measurement device (shredder and compactor only)	Per mfg. recommendations, but at least monthly
Carbon Absorption Canisters	Check that units are functional and that valves are properly positioned	Daily when unit in use
	Check carbon bed for breakthrough	Daily when unit in use
Lamp Crusher Only	Ensure fan is operational	Daily when unit in use, before operating

All receptacles are properly positioned And have secure connection rings

Daily when unit in use, before Operating

Each receptacle of co-products shall be Inspected for cross-contamination

Daily when unit in use

SFN:WRW:bjh\051161s.doc

ATTACHMENT C

CONSTRUCTION CERTIFICATION FORM AND INSTRUCTIONS

Clean Harbors Svcs Inc

LPC 0316000051

RCRA Log No. B-16R

CONSTRUCTION CERTIFICATION

This statement is to be completed by both the responsible officer and the registered professional engineer upon completion of construction in accordance with 35 IAC Section 702.126. Submit one copy of the certification with original signatures and two additional copies (four additional copies for UIC wells). Forward these certification statements and any information required by the permit to the following address:

Illinois Environmental Protection Agency Bureau of Land - #33 Permit Section 1021 North Grand Avenue East Post Office Box 19276 Springfield, Illinois 62794-9276

FACILITY NAME:	
IEPA SITE CODE:	
U.S. EPA ID NO.: IL	
PART B PERMIT LOG #/UIC PERMIT #:	·
PERMIT (OR MODIFICATION) ISSUANCE DAT	`E:
PERMIT CONDITION NO. REQUIRING CERTIF	ICATION:
penalty of law that this document and all attachment system designed to assure that qualified personnel pr of the person or persons who manage the system, or information submitted is, to the best of my knowledge	accordance with the permit is contained in the enclosed report. I certify under swere prepared under my direction or supervision in accordance with a roperly gather and evaluate the information submitted. Based on my inquiry those persons directly responsible for gathering the information, the ge and belief, true, accurate, and complete. I am aware that there are an including the possibility of fine and imprisonment for knowing violations.
Signature of Owner/Operator	Name and Title
Signature of Registered P.E.	Name of Registered P.E. and Illinois Registration Number
Date	(P.E. SEAL)
	This Agency is authorized to require this information under

DATE:

February 23, 1996

TO:

Facilities Permitted Under the IEPA RCRA and UIC Programs

FROM:

DLPC Permit Section

SUBJECT:

Certification Documentation for Construction Required by IEPA-Issued Permits

When submitting certification required by a Part B or UIC permit for construction of any newly developed areas or units, please complete the attached certification form. Modifications to the construction of UIC wells should be certified with this form, but the installation of groundwater monitoring wells does not require this certification (unless specifically required by the permit). This will help to ensure that the submittal reaches its proper destination and that the certification will meet the regulatory requirements. Sending the Field Operations Section (F.O.S.) copy directly to the Field Office is acceptable as long as all copies have a completed copy of the enclosed form attached and you advise the Permit Section, in writing, that a copy has been sent to F.O.S.

A documentation report and as-built drawings (sealed and signed by an Illinois Professional Engineer) must be included with this certification. Information necessary to document the construction of the unit or area and to support the certification must be contained within the report. This report should include a thorough description of all construction data and drawings and should be formatted in a logical and orderly manner. The construction documentation report must contain at least the following items:

- An introduction and summary which describes the scope and purpose of the project;
- 2. A description of all construction activities, including quality assurance and quality control;
- 3. As-built drawings of the area or unit and a description of any deviations from the plans and specifications approved in the permit;
- 4. A description of the test methods used and justification for any deviations from standard test methods;
- 5. A summary of test results, identification of any samples which did not meet the specifications and the corrective action and retesting which was undertaken in response to any failing test results;
- 6. Any necessary information associated with construction of the area or unit to document that construction was in accordance with the plans and specifications approved by the permit;
- 7. Information specifically required by the permit; and
- 8. Any available photographs of the area or unit.

If you have any questions, please contact a member of the DLPC Permit Section at 217/782-6762.

SFN:WRW:bjh\051161s.doc

Enclosure

ATTACHMENT D

CLOSURE CERTIFICATION FORM

Clean Harbors Svcs Inc

LPC 0316000051

RCRA Log No. B-16R

SFN:WRW:bjh\051161s.doc

Page D-1 of D-1

This statement is to be completed by both the responsible officer and by the registered professional engineer upon completion of closure. Submit one copy of the certification with original signatures and three additional copies.

Closure Certification Statement

The hazardous waste management units at the facility described in this document have been closed in accordance with the specifications in the Agency approved closure plan. I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

USEPA ID Number	Facility Name
Signature of Owner/Operator	Name and Title
Signature of Registered P.E.	Name of Registered P.E. and Illinois Registration Number
Date	,

ATTACHMENT E

APPROVED PERMIT SECTION IDENTIFICATION

Clean Harbors Svcs Inc

LPC 0316000051

RCRA Permit Log No. B-16R

	<u>Title</u>	Latest Revision Date
SEC	CTION A RCRA PART A APPLICATION [EPA FORM 8700-23 (01-90)]	10/21/04
SEC	CTION B FACILITY DESCRIPTION	
B-1	General Description	01/31/04
B-2	Topographic Map	
B-3	Location Requirements	04/19/03
B-4	Traffic Information	
B-5	Operating Record	01/31/04
B-6	Solid Waste Management Units	01/31/04
SEC	CTION C - WASTE CHARACTERISTICS	
C-1	Chemical and Physical Analysis	
	C-1(i) Activities Exempt from RCRA	
	C-1(ii) Hazardous Waste Activities Regulated U	0.0 (4.5 (0.4
	C-1(iii) Detailed Description of RCRA Hazardous Wastes Activities	03/15/94
	C-1a Containerized Waste	03/15/04
	C-1b Waste in Tank Systems	03/15/04
	C-1d Landfilled Waste	04/19/03

	<u>Tit</u>	<u>le</u>	Latest Revision Date
	C-le	Wastes Incinerated and Used in Performance Tests	04/19/03
	C-1f	Wastes to be Land Treated	04/19/03
C-2	Waste	Analysis Plan	03/15/04
	C-2a	Parameters and Rationale	03/15/04
	C-2a(1)	Waste Pre-qualification Procedures	03/15/04
	C-2a(2)	Conformance Testing	01/31/04
	C-2a(3)	Process Operation and Compatibility Testing	. 01/31/04
٠	C-2b	Test Methods	. 01/31/04
	C-2c	Sampling Methods	10/07/04
	C-2d	Frequency of Analysis	10/07/04
	C-2e	Additional Requirements for Wastes Generated Off-Site	. 10/07/04
	C-2e(1)	Bulk Transport Receiving Procedures	. 10/07/04
	C-2e(2)	Container Receiving Procedures	. 04/19/03
	C-2e(3)	Lab Packed Waste Receiving Procedures	. 04/19/03
	C-2e(4)	General Waste Acceptance Criteria	. 04/19/03
	C-2e(5)	Nonconformance	. 04/19/03
	C-2e(6)	Rejected Loads	. 04/19/03

<u>Title</u>	Latest Revision Date
C-2f Additional Requirements for Ignitable, Reactive or Incompatible Wastes	04/19/03
C-2g Waste Analysis Requirements for Land Disposal Restrictions (LDR)	01/31/04
C-3 Quality Assurance	01/31/04
SECTION D PROCESS INFORMATION	
Introduction	
D-1 Containers	···
D-1(i) Drum Container Storage Activities	03/15/04
D-1(ii) Bulk Solids (Rolf) Container Management Activities	04/19/03
D-1(iii) Hazardous Waste Transporter Storage/Staging	04/19/03
D-1(iv) Other RCRA-Regulated Container Management Activities	10/21/04
D-1(v) RCRA - Exempt Container Management Activities	04/19/03
D-1a Containers With Free Liquids	04/19/03
D-1a(1) Description of Containers	. 04/19/03
D-1a(2) Container Management Practices	01/31/04
D-1a(3) Secondary Containment System Design and Operation	04/19/03
D-1a(3)(a) Requirement for the Base or Liner to Contain Liquids	01/31/04

	<u>Tit</u>	<u>La</u>	test Revision Date
	D-1	a(3)(b) Containment System Drainage	01/31/04
	D-1	a(3)(c) Containment System Capacity	04/19/03
	D-1	a(3)(d) Control of Run-On	01/31/04
	D-1	a(3)(e) Removal of Liquids from Containment System	04/19/03
	D-1	b Containers Without Free Liquids	04/19/03
D-2	Tank S	Systems	01/31/04
	D-2a(1)	Existing Tank System's	04/19/03
	D-2b	New Tank Systems	04/19/03
	D-2c	Dimensions and Capacity of Each Tank	04/19/03
	D-2d	Description of Feed Systems, Safety Cutoff, Bypass Systems and Pressure Controls	04/19/03
٠	D-2e	Diagram of Piping, Instrumentation and Process Flow for Each Tank System	04/19/03
	D-2f	Containment and Detection of Releases	04/19/03
	D-2g	Controls and Practices to Prevent Spills and Overflows	04/19/03
D-3	Waste?	Piles	04/19/03
D-4	Surface	E Impoundments	04/19/03
D-5	Trial B	urns	04/19/03.
D-6	Landfil	ls	04/19/03

	<u>Tit</u>	<u>le</u>	Latest Revision Date
D-7	Land	Treatment	04/19/03
D-1	0 Misce	llaneous Units	04/19/03
SEC	CTION E -	- GROUNDWATER MONITORING1	1/11/04
SF/	CTION F	PROCEDURES TO PREVENT HAZARDS	
F-1	Securi	ty	
	F-la	Security Procedures and Equipment	04/19/03
•	F-1a(1)	24-hour Surveillance System	04/19/03
	F-1a(2)	Barrier and Means to Control Entry	04/19/03
	F-1a(2)(a	a)Barrier	04/19/03
	F-1a(2)(b	o)Means to Control Entry	04/19/03
	F-1a(3)	Warning Signs	04/19/03
	F-1b	Waiver	04/19/03
F-2	Inspec	tion Schedule	. 04/19/03
	F-2a	General Inspection Requirements	07/15/94
	F-2b	Specific Process Inspection Requirements	07/15/94
•	F-2b(1)	Container Inspection	07/15/94
	F-2b(2)	Tank System Inspections	07/15/94
	F-2b(2)(a	Tank Construction Materials	01/19/95

	<u>Tit</u>	<u>le</u>	Latest Revision Date
	F-2b(2)(b) Tank Surrounding Area	01/19/95
	F-2b(2)(c)Tank Overfilling Control Equipment	01/19/95
	F-2b(2)(d) Tank Monitoring Data	01/19/95
	F-2b(2)(e) Tank Level of Waste	04/19/03
	F-2b(2)(1	f) Tank Condition Assessment for Unretrofitted Tanks	04/19/03
	F-2b(3)	Waste Pile Liner Inspection	. 04/19/03
	F-2b(4)	Waste Pile Inspection	04/19/03
	F-2b(5)	Surface Impoundment Inspection	04/19/03
	F-2b(6)	Incinerator Inspection	04/19/03
	F-2b(7)	Landfill Inspection	04/19/03
	F-2b(8)	Land Treatment Facility Inspection	04/19/03
F-3		r or Documentation of Preparedness evention Requirements	
	F-3a .	Equipment Requirements	
	F-3a(1)	Internal Communications	04/19/03
	F-3a(2)	External Communications	04/19/03
	F-3a(3)	Emergency Equipment	04/19/03
	F-3a(4)	Water for Fire Control	04/19/03
	F-3b	Aisle Space Requirements	04/19/03

<u>Title</u>			Latest Revision Date	
F-4	Prever	ntive Procedures, Structures and Equipment	.,	
	F-4a	Unloading Operations	04/19/03	
	F-4b	Run-Off	04/19/03	
	F-4c	Water Supplies	04/19/03	
,	F-4d	Equipment and Power Failure	04/19/03	
	F-4e	Personnel Protection Equipment	04/19/03	
F-5	Prever	ntion of Reaction of Ignitable, Reactive or Incompatible	le Wastes	
	F-5a	Precautions to Prevent Ignition or or Reaction of Ignitable or Reactive Wastes	04/19/03	
	F-5b	General Precautions for Handling Ignitable or Reactive Waste and Mixing of Incompatible Waste.	01/19/95	
	F-5c	Management of Ignitable or Reactive Wastes in Containers	03/15/04	
	F-5d	Management of Incompatible Wastes in Containers	03/15/04	
	F-5e	Management of Ignitable or Reactive Wastes in Tank Systems	01/31/04	
	F-5f	Management of Incompatible Wastes in Tank Systems	01/19/95	
	F-5g	Management of Ignitable or Reactive Wastes Placed in Waste Piles	01/19/95	
	F-5h	Management of Incompatible Wastes Placed in Waste Piles	01/19/95	

	<u>Title</u> <u>La</u>		test Revision Date	
	F-5i	Management of Ignitable or Reactive Wastes in Surface Impoundments	01/19/95	
	F-5j	Management of Incompatible Wastes Placed in Surface Impoundments	01/19/95	
	F-5k	Management of Ignitable or Reactive Wastes in Landfills	01/19/95	
	F-51	Management of Incompatible Wastes Placed in Landfills	01/19/95	
	F-5m	Management of Ignitable or Reactive Wastes in Land Treatment Units	01/19/95	
	F-5n	Management of Incompatible Wastes Placed in Land Treatment Units	01/19/95	
SEC	CTION G	CONTINGENCY PLAN		
G-1	Genera	l Information	03/15/04	
G-2	Emerg	ency Coordinators	12/23/99	
G-3	Implen	nentation	12/23/99	
G-4	Emerge	ency Response Procedures	•	
	G-4a	Notification to Federal, State, and Local Officials	10/14/96	
	G-4b	Identification of Hazardous Materials	04/05/99	
	G-4c	Assessment	04/05/99	
	G-4d	Control Procedures	04/05/99	

	<u>Titl</u>	<u>L</u>	atest Revision Date
	G-4d(1)	Fire and/or Explosion	07/15/94
	G-4d(2)	Release to Air, Soil, or Surface Water	10/14/96
	G-4d(3)	Equipment Failure or Power Outages	10/14/96
•	G-4e	Prevention of Recurrence or Spread of Fires, Explosions or Releases	10/14/96
	G-4f	Storage and Treatment of Released Material	10/14/96
	G-4g	Incompatible Waste	10/14/96
	G-4h	Post Emergency Equipment Maintenance	10/14/96
	G-4i	Container Spills and Leaks	10/14/96
	G-4j	Tank System Spills and Leaks	10/14/96
	G-4j(1)	Tank System Spills and Leakage	10/14/96
	G-4j(2)	Spills and Leaks from Tanks Containing Particular Chlorinated Dioxins, Dibenzofurans, and Phenols	10/14/96
	G-4k	Waste Pile Spills and Leakage	10/14/96
	G-41	Surface Impoundment Spills and Leakage	10/14/96
	G-4m	Incinerator Spills and Leakage	10/14/96
	G-4n	Landfill Leakage	04/05/99
G-5	Emerge	ency Equipment	10/14/96
G-6	Coordi	nation Agreement Requirements	. 10/14/96
G-7	Evacua	tion Plan	. 04/05/99

<u>Title</u> <u>]</u>		Latest Revision Date	
G-8	Requi	red Reports	10/14/96
SE	CTION H	PERSONNEL TRAINING	
H-1	Outlin	e of the Training Program	04/19/03
	H-la	Job Title/Job Description	01/31/04
	H-1b	Training Content	01/31/04
	H-1c	Training Director	. 01/31/04
	H-1d	Relevance of Training to Job Position	01/31/04
•	H-1e	Training for Emergency Response	01/31/04
H-2	Imple	mentation of Training Program	04/19/03
SF(TION I -	- CLOSURE AND POST-CLOSURE REQUIREM	FNTS
I-1		re Plans	
1-1			
	I-1a	Closure Performance Standard	04/19/03
	I-1b	Partial Closure Activities	04/19/03
	I-1c	Maximum Waste Inventory	04/19/03
:	I-1d	Inventory Removal, Disposal, or Decontamination of Equipment,	
		Structures, and Soils0	4/19/03
	I-1d(1)	Closure of Containers	04/19/03
	I-1d(2)	Closure of Tank Systems	04/19/03

	<u>Titl</u>	<u>e</u> <u>I</u>	atest Revision Date
	I-1d(3)	Closure of Waste Piles	04/19/03
	I-1d(4)	Closure of Surface Impoundments	04/19/03
	I-1d(5)	Closure of Incinerators	04/19/03
	I-1d(6)	Closure of Land Treatment Facilities	04/19/03
	I-1e	Closure of Disposal Units	04/19/03
	I-1f	Schedule for Closure	04/19/03
	I-1g	Extensions of Closure Time	04/19/03
I-2	Post-C	losure Plan	04/19/03
I-3	Notice	in Deed and Certification	. 04/19/03
I-4	Closure	e Cost Estimate	04/19/03
I-5	Financi	ial Assurance Mechanism for Closure	04/19/03
I-6	Post Cl	osure Cost Estimate	. 04/19/03
I-7	Financi	ial Assurance Mechanism for Post Closure	04/19/03
1-8	Liabilit	y Requirements	04/19/03
I-9	State M	fechanism	04/19/03
SEC	CTION J	- OTHER FEDERAL LAWS	04/19/03
SEC	CTION K -	- PART B CERTIFICATION	
K-1	Facility	Certification	. 04/19/03

<u>Title</u> <u>Late</u>		atest Revision Date	
K-2	Engine	eering Certification	04/19/03
SECT	ION L	CONTINUING RELEASES AT PERMITTED FA	CILITIES
L-1	Solid ³	Waste Management Units	04/19/03
L-2	Releas	es	04/19/03
		RESEARCH, DEVELOPMENT, AND RATION PERMITS	04/19/03
SECT	ION N	RCRA PART B CERTIFICATION	11/11/04
		PRIOR CONDUCT CERTIFICATIONS ITY COMPLIANCE HISTORY	04/19/03
Section	n ÅA	Air Emissions Standards For Process Vents	04/19/03
Section	n BB	Determination of Applicability to the CHSI Facility	01/31/04
Section	ı CC	Air Emission Standards for Tanks, Surface Impoundments and Containers	04/19/03
<u>List of Tables</u> <u>Latest</u>			test Revision Date
B-1.	Map R	equirements	07/15/94
C-1.	recinitat	y Treatment Using Chemical ion, Coagulation, tion	07/15/94
C-2.	Pretrea	tment Using Neutralization	07/15/94

<u>List o</u>	of Tables	<u>\$</u>	Latest Revision Date
C-3.	Pretre	atment Using Chemical Oxidation	07/15/94
C-4.	Pretre	atment Using Chemical Reduction	07/15/94
C-5.	Pretre	atment by Other Methods	07/15/94
(C-1a.	Primary Treatment of Non-Hazardous Wastes Using Chemical Precipitation,, Coagulation, and Filtration	07/15/94
.(C-2a.	Pretreatment of Non-Hazardous Wastes Using Neutralization	07/15/94
	C-3a.	Pretreatment of Non-Hazardous Wastes Using Chemical Oxidation	07/15/94
(C-4a.	Pretreatment of Non-Hazardous Wastes Using Chemical Reduction	07/15/94
	C-5a.	Pretreatment of Non-Hazardous Wastes By Other Methods	. 07/15/94
C-6.	Pretrea	tment Using Oil Recovery	. 07/15/94
C-7.	Listed	Waste Treatment Process	07/15/94
C-8.	Stabili to Off-	zation/Fixation Prior Site Disposal	04/19/03
C-9.	Wastes	for Storage and Transfer	. 04/19/03
C-10.	Hazard	ous Waste Fuel Blending	04/19/03
C-11.		lous Characteristics of Wastes Systems	04/19/03
C-12.	Pre-acc	ceptance and Conformance Testing Parameters	07/15/94

<u>List</u>	of Tables	Latest Revision Date
C-1.	3. List of Supplemental Analyses	07/15/94
C-14	4. Analytical Methods	07/15/94
C-1:	5. Sampling Methods	07/15/94
C-10	6. Hazardous Waste Shredding/Metal Washing	04/19/03
C-17	7. Hazardous Waste Lamp Crushing	03/15/04
D-1.	Container Management Areas	03/15/04
D-2.	Tank Management Areas	04/19/03
D-3.	Physical Data for Existing Tanks	01/19/95
D-4.	Operating Data for Existing Tanks	04/19/03
D-5.	Physical Data for RCRA Resulted Tanks	04/19/03
D-6.	Operating Data for Proposed Tanks	. 04/19/03
D-7.	General Container Information	. 04/19/03
D-8.	List of Reagents Used in Waste Treatment Processes	04/19/03
D-9.	Container Handling Activities and Equipment	04/19/03
F-1.	Inspection Schedule	04/19/03
F-2.	General Facility Inspection Key Inspection Elements	04/19/03
F-3.	Unit Specific Inspection Key Inspection Elements	04/19/03
F-4.	Protective Equipment Guide	07/15/94

<u>List o</u>	f Tables	Latest Revision Date
G-1.	List of Emergency Coordinators	. 11/21/03
G-2.	List Of Coordination Agreements	01/19/95
G-3.	Emergency Equipment Capabilities	. 10/24/01
H-1.	Training Program Outline	01/31/04
H-2.	Training Topics	. 07/15/94
I-1.	Capacity of Existing/Proposed Hazardous Waste Storage/Treatment Units	03/15/04
I-2.	Closure Timeline	01/31/04
I-3	Frequency of Inspections and other Post-Closure Activities	04/19/03
I-4	Estimated Annual Soil Losses from Vegetated Final cap	04/19/03
<u>List o</u>	f Appendices	Latest Revision Date
B-1.	Legal Description and Survey, Clean Harbors of Chicago, Inc., Drawing No. N-116032, prepared by National Survey Services, Inc.	Undated
B-2.	City of Chicago Zoning Ordinance, Page Nos. 227B, 228B, 234B, and 235B.	01/01/72
B-3.	Seismic Survey	01/24/91
B-4.	Roadway Analysis	01/24/91
B-5.	Vicinity/Access Maps	Undated
B-6.	Stony Island Avenue Construction Upgrade	Undated
B-7.	Stony Island Avenue Construction Details	Undated

C-1.	Typical Waste Analyses	Undated
C-2.	Treatability Study Data for Oxidation of Organic Compounds	Undated
C-3.	Treatability of Organic Compounds Using Carbon Adsorption	Undated
C-4.	Treatability Study Data for Stabilization/Fixation of Wastes	05/28/92
C-5	Generator Waste Material Profile Sheet	Undated
C-6	Container Storage Compatibility Test Procedure [Revised 09/17/83]	Undated
C-7	Laboratory Capabilities	Undated
C-8	Land Disposal Restriction Forms	02/29/00
D-1	Process Description For Existing and Proposed Activities at Clean Harbors Svcs Inc	03/15/04
D-2	Container Management Guidelines	03/15/04
D-3	Manufacturer's Literature For Mobile Waste Compactor	Undated
D-4	SOP treatment of Acid Cyanides	02/09/94
D-5	SOP Wetting of Organic Peroxides	02/09/94
D-6	Sample Labels/Markings	04/19/03
D-7	P.E. Assessment and Certification of the Design of Existing and Approved/Not Yet Constructed Containers Storage Areas	12/11/92
D-8	P.E. Certification of the Construction of the Proposed/Modified Container Storage Areas	01/19/95

D-79	P.E. Certification of Assessment of the Integrity of the Proposed/Modified Tank Containment System	7 6/17/20
D-25	P.E. Engineer Assessment and Certification of the Design of the Approved/Not Yet Contracted	16/20/90
D-24	P.E. Certification of Assessment of the Existing RCRA—Exempt Inorganic Treatment System	16/01/90
D-53	Tank Details Oily Waste Water Pretreatment	11/16/85
D-22	Design Details – Waste Storage Tank	Undated
D-51	Modifications in Effluent Holding Tanks	88/71/60
D-70	Existing Reactor Vessel Details	I0/9I/ 1 0
D-19	Design Details – Existing Sludge Conditioning Tank	88/80/70
D-18	Design Details – Existing Sludge Sump	08/70/60
D-17	Design Details – Existing Secondary Treatment Tanks	Undated
D-16	Design Details – Existing Clarifier Internal Assembly	18/97/80
D-12	Design Details – Existing Chemical Treatment Unit	18/81/70
D-14	Construction Details for Existing Bulk Storage Tanks	08/81/11
D-13	Construction Details for Existing Waste Receiving Tanks	08/70/60
D-15	P.E. Assessment and Certification of the Design of Proposed/Modified Tank Storage System	₱6/8I/LO
D-11	Pegasus Fuel Blending System Operations Manual	≯ 6/90/∠0
D-10	Technical Specifications for Coating Systems	Undated
6-A	Subsurface investigation Reports	06/17/90

D-27	P.E. Assessment and Certification of the Design of Pegasus System	03/12/93
D-28	Structural Design and Secondary Containment Calculations for Approved/Not Yet Constructed Tank Units	03/12/93
D-29	Structural Design and Secondary Containment Calculations for Proposed/Modified Tank Systems	07/21/94
D-30	Waste Codes and Treatment Standards of Process Waste Surface Impoundments	Undated
D-31	Surface Impoundment Closure Certification	12/30/93
D-32	IEPA Closure Certification Approval	06/30/94
D-33	Survey Plat	05/03/94
D-34	Surface Impoundment Post-Closure Notice	05/10/94
D-35	Mfg's Literature: Enpac Corporation "Poly-Spillpallet 3000" Self-Contained Pallets	Undated
D-36	Engineering Drawings and Design Specifications for Bulk Storage Tank Farm (Unit 16)	01/-/95
D-37	Engineering Certifications for Dock Extension (Unit Q) and Fire Suppression System (Unit Q1)	07/21/99
D-38	Compressed Gas SOPs for Venting and Downloading, Engineering Certifications	10/22/01
D-39	Construction Certification – Unit G1	10/29/02
D-40	Unit 25 Lab Pack Pour-Off Emission Calculations, Engineering Certification	08/26/99
D-41	Building 42 Subpart BB/CC Emission Calculations, Engineering Certification, Potential Pathways to Humans or Environmental Receptors	01/22/99

D-42	Shredding System Engineering Calculations	09/20/00
D-43	Shredder/Hydropuplar Operations Manual	05/02/96
D-44	Shredding System Subpart BB/CC Emission Calculations, Potential Pathways to Humans of Environmental Receptors	01/17/00
D-45	Engineering Certification Units 16 and 25	03/20/01
D-46	Engineering Certification Units B and E	09/01/95
D-47	Engineering Certification Unit 26	09/09/95
D-48	Engineering Certifications Units 43 and 60	09/15/95
D-49	Engineering Certifications Units 13, 15, 59, 61, 62	07/03/95
D-50	Information Concerning Stacking of Non-Metallic Containers	04/24/03
D-51	Demonstration of Stacking Heights and Pile Arrangement Meeting NFPA 30 Requirements	10/17/03
D-52	Compressed Gas Cylinder Program and Guidelines	08/-/95
D-53	Engineering Assessment for Modified Building 25 and Truck Pad	03/20/01
D-54	Engineering Assessment for Unit F1, Unit Q, Unit V and Unit R2 (new portion)	11/25/02
D-55	Internal Tank Inspection Reports for Existing Tanks	12/19/02
D-56	Containment System Calculations for Unit Q and Unit X	Undated
D-57	Evaluation Data Sheets for Lab Pack Pour-Off Hood Ventilations	10/01/04
D-58	Unit F-1 Drawing	10/04/04

D-59	Tank Thickness Testing and Corrosion Rates	Thru 03
D-60	Lamp Crushing Machine	09/09/04
D-61	SOP for the Addition of Dry Ice to Roll-offs/Intermodals	Undated
D-62	SOP for the Wetting of Black Powder	11/07/01
E-1	Borings Logs and Groundwater Monitoring Well Construction Summaries	09/28/95
E-2	Groundwater Assessment Program, Fourth Quarter 1991 Report	1994
E-2A	Groundwater Elevation Data	04/29/94
E-3	Historical Data by Sampling Location	04/03/91
E-4	WMI Manual for Groundwater Sampling	1991
E-5	Laboratory Explanation of Pesticide and Herbicide Detection in April 1987 Event	Undated
E-6	Groundwater Assessment Report	1987
E-7	Groundwater Monitoring Enhancements Work Plan Report	Undated
F-1	Confined Space Entry Procedures	Undated
F-2	25 Year, 24 Hour Rainfall Chart	Undated
F-3	Fire Control Analysis	02/13/92
F-4	Professional Fire Protection Engineer Certification of Foam Fire Protection System Upgrade	02/19/96
F-5	P.E. Assessment and Certification of the Design of Railcar Containment Basin	05/18/95
F-6	Secondary Containment Calculations for Loading/Unloading Areas	03/10/93

F-7	Personal Protective Equipment Program	03/-/90
F-8	Equipment and Procedures for Transfer of Flammable Liquids	Undated
F-9	Ultrasonic Tank Testing Procedures and Qualifications	Undated
F-10	Remedial Work Order and Reinspection Report	Undated
G-1	Site Plan Existing Approved, Modified and Proposed Facilities & Operation	04/15/03
G-2/ G-3	Hazards Evaluation Report	10/04/04
G-4	Anticipated Hazards at Clean Harbors Svcs Inc 03/15	/94
G-5	Emergency and Safety Equipment Location Plan	04/18/01
G-6	Documentation of Emergency Coordination Agreements	04/15/91 and 05/03/91
G-7	Evacuation Plan	01/19/00
G-8	Products of Incomplete Combustion	Undated
H-1	Job Descriptions/Job Titles	10/-/90
H-2	Professional Resumes	Undated
H-3	CHSI Training Documentation Form	Undated
H-4	CHSI Personnel Training Summary	04/19/03
I-1	Survey Plat	05/03/94
I-2	Post-Closure Notice	05/19/94
I-3	Closure Cost Estimate	03/15/94
I-4	Closure Financial Assurance Mechanism	12/13/02

	•	
I-5	Post-Closure Cost Estimate	10/17/03
I-6	Post-Closure Financial Assurance Mechanism	01/09/03
I-7	Hazardous Waste Facility Certificate of Liability Insurance	Effective 05/01/03
J-1	Existing CHSI Air Pollution Control Permits	05/30/01
J-2	Existing CHSI Water Pollution Control Permits	01/10/03
K-1	Facility Certification	11/11/04
K-2	Certification by Professional Engineer	10/07/04
L-1	CHSI Operating Permit	06/04/01
L-2	Solid Waste Management Units and Past Releases at CWMCSI	06/29/02
L-3	CHSI Release Reports	04/10/03
O-1	Clean Harbors, Inc. Sec. 10K Form	05/05/03
O-2	Prior Conduct Certification Forms	05/15/03
O-3	Description of Violations of Federal, State or Local Laws, Regulations, Ordinances	Undated
BB-1	List of Subpart BB Regulated Equipment	as 05/07/03
BB-2	Leak Detection Monitoring	12/06/96
BB-3	Calibration Information	Undated
BB-4	Outline of Minimum Facility Compliance Record	12/06/96
BB-5	Inspection and Leak Repair Data Form	Undated
BB-6	RCRA Air Emissions Regulations Overview	Undated

Page E-23 of E-23

	CC-1	Closed Vent and Carbon Absorption Systems	Undated		
	CC-2	Subpart CC – Compliance Requirements for Affected Facilities .	12/06/96		
	CC-3	Subpart CC – Regulated Equipment and Processes	12/06/96		
SFN:WRW:bjh\051161s.doc					

Note: The portions of the approved permit application that were undated were received by the Illinois EPA on or before December 19, 2004.

ATTACHMENT F FINANCIAL ASSURANCE REQUIREMENTS

Clean Harbors Svcs Inc

LPC 0316000051

RCRA Log No. B-16R

I. FINANCIAL ASSURANCE FOR CLOSURE

The permittee shall maintain financial assurance for the closure of the units at the facility as described in the application and as identified below in accordance with 35 Ill. Adm. Code 724.242 and 724.243.

A. Description of Units

<u>Unit</u>			Financial Assurance Required for Unit (1995 dollars)		
i.	Existing Units to be Operated as of the Effective Date of this Permit				
	Container Storage Units Drum Storage Area (Unit G1) Drum Storage Area (Unit R1) Lab Pack Pouroff Area (Unit F1) Drum Storage Area Expansion (Unit R2).	\$ \$ \$ \$	254,218		
	Container Storage Building (Unit 25)	\$ \$ \$	169,827 70,817 44,644		
	Bulk Solids Storage Units Bulk Container Storage Area (Unit Q1) Bulk Solids Storage Pad (Unit B)	\$ \$	28,176 63,273		
	Tank Storage/Processing Units Fuels Blending Operation (Unit 43) Tank Farm (Unit 16)	\$ \$	12,498 490,179		
	Transportation Storage/Staging Units Truck Unloading Area and Bulking Area (Unit Q) Truck Loading Dock (Unit V)	\$ \$	74,616 73,716		
	Truck Staging Area (Unit C)	\$ \$ \$ \$	50,024		
			2.069.511		

	Total for Existing/proposed Units Upon Effective Date Including 10% contingency.		Financial Assurance Required for Unit (1995 dollars) \$2,276,462	
P	roposed Units to be Operated in the Future			
F	Proposed Container Storage Units			
-	Drum Storage Area Expansion (Unit R2)	\$	34,160	
	Lab Pack Repack and Consolidation Area (Unit U)	\$	20,294	
P	Proposed Bulk Solids Storage Units			
	Rolloff Container for Listed Waste (Unit Z1)	\$	12,104	
P	Proposed Tank Storage/Processing Units			
	Listed Waste Storage Tanks (Unit Y)	\$	548,819	
	Process Building 3 (Unit Z)		148,146	
	Cank Farm Unit 22		151,428	
	Shredding Operation	\$	36,007	
	Metal Washing Operation	\$	24,515	
P	roposed Transportation Storage/Staging Units	•		
	ruck to Truck Transfer Pad (Unit W)	\$ -	97,669	
	isted Waste Loading/Offloading Area (Unit X).	\$	49,491	
	Init 69	\$	50,073	
P	roposed Miscellaneous Treatment Unit and Storage Area	1		
	Building 42	- \$	17,977	
	Vest Pad	(cc	ombined)	
T	OTAL FOR FUTURE UNITS	\$1	,190,683	
	OTAL		,259,810 ,585,791	

B. Conditions

1. The Permittee shall provide financial assurance for the amounts identified above plus a 10% contingency cost. The required financial assurance shall be adjusted for inflation to the current year. The permittee shall provide financial assurance for all existing units. Financial assurance for proposed units shall be submitted to the Agency 60 days prior to placing wastes in the units identified in Condition I.A.ii above. No wastes shall be placed in the proposed units until the requirements of this condition have been met.

II. FINANCIAL ASSURANCE FOR POST-CLOSURE CARE

The permittee shall maintain financial assurance for the post-closure care of the surface impoundments at the facility as described in the application in accordance with 35 Ill. Adm. Code 724.244 and 724.245.

A. Surface Impoundments

Surface Impoundments	Required for Unit (1995 dollars)
Annual cost of post-closure care	\$ 166,144
TOTAL cost of post-closure care	\$4,984,317

SFN:WRW:bjh\051161s.doc

ATTACHMENT G GROUNDWATER MONITORING DIAGRAMS, REPORTS, TABLES

LPC 0316000051

Clean Harbors Svcs Inc

RCRA Log No. B-16R

Attachment G.1


Monitor Well Construction Diagram

LPC 0316000051

Clean Harbors Svcs Inc

RCRA Log No. B-16R

Monitoring Well Diagram

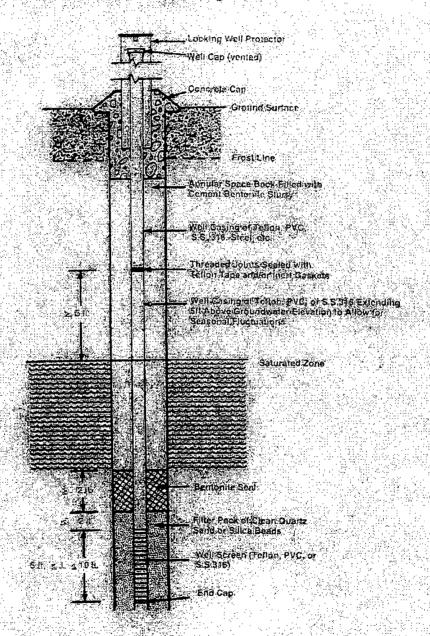

Attachment G.2

Field Boring Log

Clean Harbors Svcs Inc

LPC 0316000051

	Protection Agency			ŀ	riei	d. B01	ing Lo	og.	Page of	
	a roterman agenty					•				
		•		Cau	onto:					
Site 115 N	o. Federal ID No.	<u></u>								
Sac Name	\$ 12 <u>12 12 12 12 12 12 12 12 12 12 12 12 12 1</u>	<u> </u>		:		100			ng Well No.	
Chadrang	des <u>Sec. Sec. 1</u> .	_ K	•	Surface Elevation:						
				۸up	er D	epth:	ing of the second secon	Rotany [Depthr	
Plane) Co	State; ord, 32 (35) 6 (27) 10 (47) 10 (47)		ingi Naka	Date	e: Sta	et:		Finish		
factude:	Longitude:			er, 1877 Maria	١.		ianti.			
Bonng Lo	Critials					SAN	PLES		Personnel	
Drilliag®	dignaent:								64	
					16	2	2	6	D-	
	성격이 작가꼭보았다. 현대를			Simple Vo.	12	Sample Reinfery (N)	Resistantes N.Values Office Courts	QVA bi HATE Readings		
		and and a	Depth In Feel	į	Time.	. S		1 2 3		
Elev.	Description of Material								REMARKS	
							s. Provide Jacobski			
	물일 회사 중요한 달로 어떻게									
			4		*****	والرواد والمحادة				
		.	j.			in in Sec.				
	14-30 - 1 15-34 - 3 21 25 15 3 3 2 3 2 3 2 3 3 3 3 3 3 3 3 3 3 3 3									
India		#E-				åØ.				
	이 아들은 이 등에 되는 사람들이 사용하다 그 등에 모르는 것 같습니다. 일본 등이 되는 사용이 하는 사용이 들은 등을 받는데 하는 것으로 되었다.								ii dhe an	
		: E. J								
	사람이 사람이 생활하는 것으로 살았다. 사람이 가입니다. 사람들은 경기를 가지하는 것으로 사용하는 것으로 있다.		*							
			3							
			4							
				S#:						
					1					
				+					Filipa en	
	고려고 보고를 하고 통원하고 보면된						4 4			

Field Boring Log (revised 02/02/04

Attachment G.3
Well Completion Report
Clean Harbors Svcs Inc

LPC 0316000051 RCRA Log No. B-16R

Illinois Environmental Protection Ager		Well Completion Report		
- 「開発する事業をというという主義」	County:			
Site Name:	Wight	Well #:		
Site Name: State Office Plane Coordinate: X Y (or) Latitude:	Longitude:	Borehole #:		
Surveyed by	IL Registration ::	and the same of the same same same same same same same sam		
Drilling Contractor	Driller:			
Consulting Print	e de la companya de			
Drilling Method:	and a complete programme and the complete progra)		
Logged By		Date Fraished		
Report Ferm	eta esta la capación de la compaña de la			
Completed By:	Date:			
ANNULAR SPACE DETAILS	Elevations De	pths (.03ft)		
	(MSL)* (Bo	GS) Top of Protective Casing		
		Top of Riser Pape		
Type of Surface Seat		Ground Sunface		
Type of Annular Scalant		Top of Annular Scalint		
Installation Melhod		Static Water Lovel		
		(After Completion)		
Sature Time.				
Type of Bentonite Seal - Granular, Pollet, Slutry (Cheese Ope)		Top.of Scal		
lastalladon Method:		Top of Sand Pack		
Sching Tabec		Top a Sarcen		
Spe of Sand Pack				
Gralo Size (Sieve Size)		Bottom of Screen		
Installation Method		Bottom of Well		
	*Referenced to a Na	Boxtom of Borehale		
Type of Backfill Marerial (fapplicable)	CASING MEASURMENTS			
Installatron Method:	Districter of Borehole (similar)			
WELL CONSTRUCTION MATERIAL	ID of Kise? Pope (thehes) Professive Casing Largin (1961)			
(Choose one type of moternal for each area) Propositive Casing SSOB SSOB STATE (FOC. or cities)	Rise Pipe Legith (Jeen) Legithur Serger (A and Can Jean			
Bise Piot Alloya W.L. SSAM SSTACTOR PAC IN This Bisk Club Below W.T. SSAM SSAM PRITE PAC IN COLUMN	Screen an entity stourches ching Total Length of Cosing Ball Cosing Screen Stotal	(eo.)		
Screen SSIDE SSITE OF THE PVC nicother	Screen Stot Size 1			

Well Completion Form (revised 02/96/02)

	】 严重的结束的"性"的"可"(《《中语》)温度(图像))"在。)。"如何说道	\$ 1.400 D. C.
	Diameter of Burehole (maker)	
	10 of Riser Pipe (Hohes)	
Ĭ	Professive Cashie Length (rect)	
Ų,	Risor Proce (contraden)	
1	Isotronian Screen in Find (an dem)	
3	Scienti lengthidi slotati last dati (reen)	Edinalija Wilai
	Jonal Lenethrof Casing Fledil	
. i	Serem Stores and Stores	

Attachment G.4

IEPA Monitor Well Plugging Procedures

Clean Harbors Svcs Inc

LPC 0316000051

ILLINOIS EPA MONITOR WELL PLUGGING AND ABANDONMENT PROCEDURES

	:	Well Construction	Plugging Procedure
nt Well's	I-A.	if backfilled with cement grout above bentonite seal and/or sandpack:	 Cut casing off at desired depth. Mix neaf gement slurry (6 gal. water per 94 lb. bag cement). insert tremi pipe (1" i.d. pvc) into well and extend to bottom. Slowly pump sturry under low pressure through temi pipe. Slowly withdraw tremi pipe - making sure bottom of pipe remains below pure slurry. Continue slow pumping until all formation water and the watery slurry mix is displaced from top of casing.
I. Unconsolidated Sediment Wells	1-8	,if backfilled with:soft sediments (cuttings) above bentonite.seal and/or sandpack:	 Knock out and remove thin surface concrete plug, if present. Re-auger entire length of well. Remove well casing from re-augured borehole. Mix near cement sturny (5 gat, water per 94 lb, bag dement). Insert tem) pipe (1* i.d. pxc) into augers and extend to bottom. Slowly pump sturny under low pressure through tremi pipe. Continue slow pumping until all formation water and the water sturny inix is displaced from top of casing. Slowly withdraw fremi pipe - making sure bottom of pipe remains below pure sturny. Pull a flight of augers (5" if in unstable materials and hole collapse is likely or 10" if in competent material and collapse is unlikely). Top off cement sturny after each flight is removed.
	I-C:	if monitor well construction is unknown:	1. Follow procedures in I-A.
II. Bedrock Wells	Ìl⊭A;	All bedrock monitor wells:	 Gut casing off at desired depth. Mix neat cement sturry (5 gal, water per 94 lb. bag cement). Insent tremi-pipe (1" i.d. pvc) into well and extend to bottom. Slowly pump sturry under low pressure through tremi pipe, Slowly withdraw pipe making sure bottom of pipe remains below pure sturry. Gontinue slow pumping until all formation water and the watery sturry mix is displaced from top of casing.

Well Plugging Procedures (revised 92/06/02)

Attachment G.5

Electronic Groundwater Submittal Forms

Clean Harbors Svcs Inc

LPC 0316000051

Formatting Requirements for the 01 Record of the Electronically Submitted Groundwater and Leachate Data (the 01 Record portion of the LPC-160 is included for example purposes)

IL 532 1213 ILLINOIS ENVIRONMENTAL PROTECTION AGENCY DIVISION OF LAND POLLUTION CONTROL Page 1 of ____ CHEMICAL ANALYSIS FORM RECORD TRANS FEDERAL ID NUMBER MONITOR POINT NUMBER SITE INVENTORY NUMBER (see Instructions) __ co. FACILITY NAME TIME COLLECTED BACKGROUND SAMPLE (X) FOR IEPA USE ONLY (24 Hr. Clock) UNABLE TO COLLECT SAMPLE (see Instructions) DATE RECEIVED MONITOR POINT SAMPLED BY (see Instructions) OTHER (SPECIFY) SAMPLE FIELD FILTERED — INORGANICS (X) SAMPLE APPEARANCE COLLECTOR COMMENTS LAB COMMENTS LPC 160 01/90 This Agency is authorized to require this information under Illinois Revised Statutes, 1979, Chapter 111 1/2, Section 1004 and 1021. Disclosure of this information is required. Failure to do so may result in a civil penalty up to \$25,000 for each day the failure continues a fine up to \$1,000.00 and imprisonment up to one year. This form has been approved by the Forms Management Center. All analytical procedures must be performed in accordance with the methods contained in "Test Methods for Evaluating Solid Wastes, Physical/Chemical Methods," SW-846, 3rd Edition, September 1986 or equivalent

methods approved by the Agency. Proper sample chain of custody control and quality assurance/quality control

procedures must be maintained in accordance with the facility sampling and analysis plan.

*Only Keypunch with Data in Column 35 or Columns 38-47

KEY:

<u>Description</u>	<u>Format</u>		
Record Code	LPCSM01		
Trans Code	Α		
Site ID	0000000000		
Mon Pt ID	G000		
Date Collected	000000		
Lab	•		
Filler			
Report Due Date	000000		
Date Received	000000		
Filler 2			
Background Sample			
Time Collected	0000		
Unable to Collect Sample			
Monitoring Point Sampled By			
Field Filtered – Inorganic			
Field Filtered – Organic			
Filler 3	•		
Lab Comments			
	Record Code Trans Code Site ID Mon Pt ID Date Collected Lab Filler Report Due Date Date Received Filler 2 Background Sample Time Collected Unable to Collect Sample Monitoring Point Sampled By Field Filtered – Inorganic Field Filtered – Organic Sample Appearance Collector Comments		

Attachment K-2Formatting Requirements for the 02 Record of the Electronically Submitted Groundwater and Leachate Data (the 02 Record portion of the LPC-160 is included for example purposes)

	FIELD MEASUREMENTS CONSTITUENT DESCRIPTION AND REQUIRED UNIT OF MEASURE	STORET NUMBER	Remarks See Inst.	Replicate	< or >	VALUE
Q	TEMP OF WATER (unfiltered °F)	0 0 0 1 1	35	36	37	38
Q	SPEC COND (unfiltered umhos)	0 0 0 9 4			1	
Q	pH (unfilted units)	0 0 4 0 0				<u> </u>
Q	ELEV OF GW SURF (ft ref MSL)	7 1 9 9 3		2		•
Q	DEPTH OF WATER (ft below LS)	<u>7 2 0 1 9</u>				
A	BTM WELL ELEV (ft ref MSL)	7 2 0 2 0			<u> </u>	
Q	DEPTH TO WATER FR MEA PT (ft)	<u>7 2 1 0 9</u>) 	<u> </u>	

IL 532 1213 LPC 160 01/90

This Agency is authorized to require this information under Illinois Revised Statutes, 1979, Chapter 111 ½, Section 1004 and 1021. Disclosure of this information is required. Failure to do so may result in a civil penalty up to \$25,000 for each day the failure continues a fine up to \$1,000.00 and imprisonment up to one year. This form has been approved by the Forms Management Center.

All analytical procedures must be performed in accordance with the methods contained in "Test Methods for Evaluating Solid Wastes, Physical/Chemical Methods," SW-846, 3rd Edition, September 1986 or equivalent methods approved by the Agency. Proper sample chain of custody control and quality assurance/quality control procedures must be maintained in accordance with the facility sampling and analysis plan.

KEY:

Spaces Numbered	Description	Format
Spaces 1-7	Record Code	LPCSM02
Space 8	Trans Code	Α
Spaces 9-18	Site ID	0000000000
Spaces 19-22	Mon Pt ID	
Spaces 23-28	Date Collected	
Space 29	Lab	•
Spaces 30-34	STORET Number	
Space 35	Remarks	
Space 36	Replicate	
Space 37	< or >	
Space 38-47	Value '	

^{*}Only Keypunch with Data in Column 35 or Columns 38-47

Attachment G.6

RCRA Facility Groundwater Leachate and Gas Reporting Form (LPC 592)

Clean Harbors Svcs Inc

LPC 0316000051.



Illinois Environmental Protection Agency

jab\041021i.doc

LPC 592 5/2000

Bureau of Land 1021 North Grand Avenue East Box 19276 Springfield 1L 62794-9276

RCRA FACILITY GROUNDWATER, L'EACHATE AND GAS REPORTING FORM

This form must be used as a cover sheet for the notices and reports, identified below as required by (1) a facility's RCRA interim status regulations, or (3) a facility's RCRA permit. All reports must be submitted to the Illinois EPA's Bureau of Land Permit. Section "This form is for use by Hazardous Waste facilities only. Reporting for Solid Waste facilities should be submitted on a separate form. All reports submitted to the Illinois EPA's Bureau of Land. Permit Section must contain an original, plus a minimum of two copies.

Note: The form is not to be used with germal or closure plan modification requests. The recitives approved period or closure plan will store whether the document you are submitted is required es a report or a modification request. Site ID# Facility Name: Fed ID# Facility Address: Check the appropriate heading. Only one heading may be checked for each corresponding submittal. Cheek the appropriate sub-heading, where applicable. Attach the ofiginal and all copies behind this form. LPC-160 Forms Groundwater Leachate Quarterly Indicate one: 1.2 Quarterly—Indicate one: 1 Semi-Annual Semi-Annual Annual Annual Biennial Biennial Groundwater Data (without LPG-160 Forms) Quarterly - Indicate one; 1 2 3 4 Semi-Annual Annual Biennial Well-Construction Information Well Construction Forms, Boring Logs and/or Abandonment Forms Well Survey Data (e.g., Stick-up Elevation Data) Notice of Statistically Significant Evidence of Groundwater Contamination (35 III. Adm. Code 724 198) Notice of Exceedence of Groundwater Concentration Limit (35.III. Adm. Code 724.199(h)) Notice of Alternate Source or Error in Sampling Analysis of Evaluation of Groundwater (35 III. Adm. Code 724.199(i)) Gas Monitoring Reports Other (identify) IL 532-2575

ATTACHMENT H

STATUS OF CORRECTIVE ACTION AT FACILITY

Clean Harbors Svcs Inc

LPC 0316000051


ATTACHMENT H.1

INTERIM STATUS CLOSURE EFFORTS

AT THE FORMER CWM PORTION OF THE FACILITY

Clean Harbors Svcs Inc

LPC 0316000051



ATTACHMENT H.1

Interim Status Closure Effort at the Former CWM Portion of the Facility

Several units on the former CWM portion of this facility have been or are being closed in accordance with plans approved by Illinois EPA Log Nos. C-307, C-742, C-759 and C-771. A description of the closure activities and units undergoing closure for these four Log Numbers follows:

- 1. The IEPA approved a closure plan for four interim status hazardous waste surface impoundments under Log No. C-307. Eventually, these units were closed as landfills and Illinois EPA accepted certification of closure of these units on June 30, 1994. As a result of closing the impoundments as landfills, Clean Harbors is required to carry out post-closure care of these units in accordance with their RCRA permit.
- 2. A plan to complete closure of 16 former hazardous waste management units was initially approved by Illinois EPA on October 31, 1994 (Log No. C-742). A list of these units is provided in Table 1.
 - a. A substantial amount of information relative to this closure effort was approved by IEPA on September 28, 1995.
 - b. On August 20, 1996, IEPA determined that closure of all of these subject units with the exception of Unit 49 Outdoor Container Storage Areas was complete. However, this letter also indicates that the subject units as well as the Fire Suppression System may be subject to additional investigation and possible corrective measures under the corrective action provisions of the facility's RCRA permit. The Unit 49 Outdoor Container Storage Areas was subsequently closed under Log No. C-771, as described in Item 4, below.
 - c. A review of Illinois EPA files found that these units are within the area to receive an engineered barrier as part of closure of the former incinerator and associated equipment (see Item 3 below). Establishment of this engineered barrier and associated institutional control will bring closure and corrective action responsibility for these units to completion.
- 3. On January 25, 1996 IEPA approved a closure plan for several hazardous waste management units present in the former incinerator process area at the former CWM incinerator facility (Log No. C-759).

- a. A list of the units addressed in this plan is provided in Table 2.
- b. A closure plan modification request for this project was approved by IEPA letter dated January 16, 2003. This modification proposed that additional soil samples be collected and analyzed to better define the extent of soil contamination in the area; it also indicates that Clean Harbors desires to use existing structures and pavement as engineered barriers as part of the overall closure effort.
- c. The IEPA by letter dated December 21, 2004 approved a report submitted on the additional sampling required by its January 16, 2003 letter and made a No Further Action determination with respect to the former incinerator process area of the facility, subject to establishment of an engineered barrier ELUC.
- 4. On October 30, 1996, approved a combination closure plan and closure certification statement for two container storage areas (one west of the Bulk Storage Tank Farm and the other northwest of the Bulk Storage Tank Farm; the Bulk Storage Tank Farm is also referred to as Unit 49) (Log No. C-771).
 - a. Condition 1 of the October 30, 1996 approval letter indicates that these units may be subject to additional investigation and corrective measures under the corrective action portion of the facility's RCRA permit.
 - b. A review of Illinois EPA files found that these units are within the area to receive an engineered barrier as part of closure of the former incinerator and associated equipment (see Item 3 above). Establishment of this engineered barrier and associated institutional control will bring closure and corrective action responsibility for these units to completion.

Tables: Table 1 -- Units Closed Under C-742

Table 2 -- Units Closed Under C-759

JLM:JF:bjh\051161s.doc

ATTACHMENT H.1

Table 1

Description
Bulk Storage Tank T108
Bulk Storage Tank T-111
The Bulk Storage Tank Farm Piping, Pumps and Ancillary Equipment
The Building 43 Primary Drum Shredder
The Building 43 Drum Crusher Unit
The Building 26 Secondary Shredder
Ancillary Equipment Associated with Units 1 through 6
The Building 26 Roller Conveyor Unit
Bulk Storage Tanks T-101 through T-107, T-109, T110 and T-112
The Tank Farm Secondary Containment Structure
Building 25
Building 26
Building 43
Area 38 - the Old CWM-CS Ash Pad
The Conveyor Between Buildings 26 and 43
Unit 49 Outdoor Container Storage Areas

JLM:JF:bjh\051161s.doc

ATTACHMENT H.1 Table 2

The following units are addressed in the closure plan assigned Log No. C-759 by Illinois EPA:

- a. Hazardous Waste Incineration System (T03 unit):
 - (1) Rotary Kiln (Unit 19) and Ancillary Equipment;
 - (2) Secondary Combustion Chamber (Unit 20);
 - (3) Overhead Pipe Rack (Unit 18) running from:
 - (a) the Secondary Combustion Chamber to the Tank Farm and
 - (b) the Secondary Combustion Chamber to the Control Room;
 - (4) Air Pollution Control System (Unit 21);
 - (5) Stack Monitoring Building (Unit 34); and
 - (6) Concrete/Asphalt Foundation and Structures Underlying the Incineration System Units Undergoing Closure;
- b. Hazardous Waste Container Storage/Staging Areas (S01 units):
 - (1) Kiln Staging Areas (Unit 45):
 - (a) South of the Rotary Kiln and
 - (b) South of the Secondary Combustion Chamber;
 - (2) Truck Staging Area (Unit 48);
 - (3) Outdoor Container Storage Areas (Unit 49):
 - (a) North of the Air Pollution Control System and
 - (b) East of Building 43; and
 - (4) Ash Hopper Staging Area (Unit 54);
- c. Underground Stormwater Collection System; and
- d. Process Wastewater Treatment System:
 - (1) Neutralizing Area (Unit 22);
 - (2) Effluent Treatment Building (Unit 23);
 - (3) Lamella Settlers (Unit 24); and
 - (4) Filter Building (Unit 42).

ATTACHMENT H.2

1994-95 CONSTRUCTION EFFORTS AT THE FORMER

CWM PORTION OF THE FACILITY

Clean Harbors Svcs Inc

LPC 0316000051

ATTACHMENT H.2


1994-95 Construction Efforts at the Former CWM Portion of the Facility

Once Clean Harbors decided to incorporate the former CWM-CS Incinerator facility into its facility in Chicago, the company also decided that it needed to construct several new units on the former CWM-CS property. A summary of the activities associated with this construction effort which occurred in 1994 and 1995 follows:

- 1. On August 16, 1994, the Illinois EPA approved a plan to conduct a pre-construction investigation of soil contamination present at the following proposed units:
 - a. Area 13—Rail Car Unloading Area
 - b. Area 14—Truck Scale
 - c. Area 59—Truck Staging Area
 - d. Area 60—Roll-off Pad for Fuels Blending
 - e. Area 61-Container Handling Area
 - f. Area 62—Truck Pad

The letter indicated this work was being carried out in accordance with an agreement between Clean Harbors and IEPA to investigate for potential soil contamination prior to conducting any construction efforts in these areas. The results of this investigation would allow the construction efforts to be coordinated with RCRA corrective action efforts in these areas.

- 2. On November 22, 1994, the Illinois EPA granted a temporary authorization to Clean Harbors to construct the following 11 units:
 - a. Rail Car Unloading Area (Area 13);
 - b. Ignitable Liquid Tank Farm (Area 16);
 - c. Container Storage Building (Area 25);
 - d. Ignitable Container Storage Building (Area 26);



- e. Fuel Blending Area (Area 43);
- f. Truck Staging Area (Area 59);
- g. Roll-off Pad for Fuel Blending (Area 60);
- h. Container Handling Dock (Area 61);
- i. Truck Pad at the Container Handling Dock (Area 62);
- j. Fire Suppression System;
- k. Truck Staging Area (on old Clean harbors portion of the facility)

A non-regulated construction effort (Truck Scale Relocation—Area 14) was also approved in this action).

- 3. A July 7, 1995 IEPA letter responded to a report documenting the results of a preconstruction investigation conducted at the areas of the former CWM Incinerator Process Area identified in Item 1 above. The results showed that neither gross contamination nor buried drums and structures were present in any of the areas investigated. Contaminant levels were high enough that they needed to be further addressed as part of the RFI for the CWM-CS portion of the facility.
- 4. On September 20, 1995, IEPA approved a construction certification report for all the units identified in Item 1, except Area 60 (the construction certification report for Area 60 was subsequently approved on November 7, 1995). In addition, this report contained certification of construction for Unit 15—Tank Truck Loading/off-Loading Platform.
- 5. On October 5, 1995, IEPA approved a construction report of the Bulk Storage Pad (Unit B) and the Truck Staging Area (Unit C).
- 6. On November 7, 1995, IEPA approved the construction certification report for the Fuel Blending Operation (Unit 43) and the Roll-Off Pad for Fuel Blending (Unit 60). This in conjunction with the September 20, 1995 IEPA letter approving the construction completion report for the 5 units for which a pre-construction soils investigation was completed.

- 7. In a separate November 7, 1995 letter, IEPA approved the construction certification report for (2) Flammable Storage Tank Farm (Unit 16) and (2) Container Management Building (Unit 25).
- 8. In yet another separate November 7, 1995 letter, IEPA approved the construction certification report for the Ignitable Container Management Building (Unit 26), subject to the requirement that the permittee shall not place containers of waste on the ramps inside this unit.
- 9. As required by Illinois EPA's July 7, 1995 letter identified in Item 3 above, additional sampling for the units identified in Item 1 above was proposed by Clean Harbors in its Phase I Supplemental RCRA Facility Investigation Work Plan, submitted on December 4, 1995 and approved by IEPA letter dated March 20, 2002 (Log No. B-16-CA-1). The Illinois EPA deemed that Clean Harbors properly implemented this work plan by a letter dated April 9, 2003 (Log Nos. B-16-CA-1 and 3). This letter required the facility to incorporate this data into a comprehensive facility-wide TACO analysis and Phase I Soils CMP. The facility subsequently submitted the Phase I Soils CMP to the Agency on May 7, 2004 and is currently under review. This submittal contains a Tier 1 TACO analysis.

SFN:JF:bjh\051161s.doc

ATTACHMENT H.3 CORRECTIVE ACTION EFFORTS AT THE ORIGINAL CLEAN HARBORS FACILITY

Clean Harbors Svcs Inc

LPC 0316000051

ATTACHMENT H.3

Corrective Action Efforts at the Original Clean Harbors Facility

- 1. A RCRA permit was issued to Clean Harbors on September 30, 1993 which required the company to carry out corrective action, as necessary, on the SWMUs of concern on the original portion of the facility (this area is approximately 26 acres in size with both portions of the Clean Harbors facility comprising a total of 56.6 acres).
- 2. An RFI Phase I workplan to investigate potential soil contamination at 18 SWMUs was approved by IEPA on November 28, 1994. The SWMUs of concern are:
 - <u>SWMU 1</u> Process Sewer System
 - SWMU 2 Outside Drum Storage Area No. 1
 - SWMU 3 Outside Drum Storage Area No. 2
 - SWMU 4 Carbon Absorption System Building
 - <u>SWMU 5</u> the northern portion of Process Building No. 1
 - SWMU 6 Process Building No. 1
 - SWMU 7 Chlorobenzene Contaminated Area
 - SWMU 8 Auxiliary Basin No. 3
 - SWMU 9 Landfill
 - SWMU 10 Former Temporary Pickle Liquor Basin
 - SWMU 11 Former Permanent Pickle Liquor Disposal Sites
 - SWMU 12 Former Pickle Liquor Basins
 - SWMU 13 Former Oil Basin
 - SWMU 14 Former Liner Basin
 - SWMU 15 Oil Contaminated Storage Area
 - SWMU 16 Tanks 1-4
 - SWMU 17 7,000-Gallon Concrete Receiving Tanks
 - SWMU 18 Truck Unloading Pad

The Illinois EPA and Clean Harbors agreed to group nine of these SWMUs into two Areas of Concern, as detailed below:

- AOC 1 Northern Portion of Process Building No. 1 Comprised of SWMU Nos. 2, 4, and 5.
- AOC 2 Southern Portion of Process Building No. 1 Comprised of SWMU Nos. 1, 3, 6, 14, 17, and 18.

- 3. On January 31, 1996, IEPA approved the RFI Phase I report for the original portion of the facility (Log No. B-16-CA-1). Soil contamination was encountered at several SWMUs and a Phase II RFI workplan was required to be submitted to investigate for soil and, as necessary, groundwater contamination.
- 4. On March 6, 1997, IEPA approved a combined Phase II/III work plan for the original portion of the facility (Log No. B-16-CA-2). The approval letter states that the goals of these activities will be to determine: (1) the nature and potential extent of soil contamination identified during Phase I of the RFI; and (2) the nature of releases, if any, to both on-site and off-site groundwater.
- 5. On April 9, 2003, IEPA approved the soil-related aspects of the RFI Phase II/III report for the original portion of the facility (Log Nos. B-16-CA-1 and B-16-CA-3). This letter specified a limited amount of additional investigation necessary to bring soils characterization to completion for the corrective action program for the entire facility (both the original Clean Harbors portion and former CWM portion). Further, Clean Harbors is required to submit to the Illinois EPA a facility-wide TACO analysis, including both past and present soils data in a Phase I CMP Soils Report.
- 6. On May 7, 2004, Clean Harbors submitted the comprehensive facility-wide TACO analysis in a Phase I Soils CMP, required by Item 5 above, which is currently under review by the Agency.

SFN:JF:bjh\051161s.doc

ATTACHMENT H.4 CORRECTIVE ACTION EFFORTS AT THE FORMER CWM PORTION OF THE FACILITY

Clean Harbors Svcs Inc

LPC 0316000051

ATTACHMENT H.4

Corrective Action Efforts at the Former CWM Portion of the Facility

The northern portion of the Clean Harbors facility was once a separately operated facility used for the incineration of hazardous waste under a state permit and interim status. Some waste treatment also previously took place in this portion of the facility. The last entity to own and operate this area prior to Clean Harbors was Chemical Waste Management Chemical Services (CWM-CS). An overview of corrective action efforts completed to date at this facility is as follows:

1. USEPA and CWM entered into a 3008(h) order in 1987 requiring CWM to investigate/remediate the below10 SWMUs:

SWMU 1 - Biochemical Filter Beds

SWMU 2 - Activated Sludge Basins

SWMU 3 - Drum Handling Area

SWMU 4 - High Solids Area

SWMU 5 - Wastewater Basin #1/Vault

SWMU 6 - Wastewater Basin #2

SWMU 7 - Chemical Treatment Area

SWMU 8 - Biochemical Treatment Area

SWMU 9 - Process Water Underground Pipe System

SWMU 10 - Hvon Tank Farm

Please note that SWMUs 7, 8, part of 9 and 10 are located within the process area, where in the past a hazardous waste incinerator operated. This incinerator has since been shut down, decontaminated, dismantled and transported off-site as part of an interim status closure project. A substantial amount of investigation was conducted at the SWMUs of concern under this order.

2. On June 30, 1995, IEPA issued a modified permit for the Clean Harbors facility allowing the CWM-CS facility to be incorporated into the Clean Harbors facility. Among other things, this permit required that Clean Harbors submit: (1) a Corrective Measures Plan for the SWMUs on the CWM-CS property (this plan was to contain a summary of investigative efforts to date; a GMZ application to address, among other things, lead and benzene contamination detected at some of the monitoring wells; proposed soil and groundwater cleanup objectives; and a general discussion of expected corrective measures to be taken); and (2) a plan to investigate for potential contamination in the Process Area

and in the vicinity of Monitoring Well G121S associated with the 4 surface impoundments which were closed as landfills (these impoundments are receiving post-closure care in accordance with the modified permit).

- 3. A limited soil investigation plan for the Process Area was approved by IEPA on March 20, 2002 (Log No. B-16-CA-1). The incineration process area has effectively undergone RCRA closure, subject to the ELUC requirement which includes an engineered barrier per the Illinois EPA letter dated December 21, 2004 (Log No. C-759-M-2).
- 4. Illinois EPA approved by letter dated April 9, 2003 (Log Nos. B-16-CA-1 and B-16-CA-3) the soil related aspects of the Initial Corrective Measures Program Final Report for the CWM-CS portion of the facility, which was submitted to the Agency on December 4, 1995. In addition, the RFI Phase II/III report for the original Clean Harbors portion of the facility was also approved at this time.

The April 9, 2003 Illinois EPA approval letter specified a limited amount of additional investigation to bring soils characterization to completion at the entire facility (both the original Clean Harbors portion and former CWM portion). Further, Clean Harbors is required to submit to the Illinois EPA, by January 9, 2004 a facility-wide TACO analysis, including both past and present soils data in a Phase I CMP Soils Report.

- 5. Illinois EPA approved by letter dated November 3, 2003 (Log No. B-16-CA-4) a Supplemental Phase I document reporting the results of the limited soils investigation required by the IEPA Letter dated March 20, 2002.
 - 6. On May 7, 2004, Clean Harbors submitted the comprehensive facility-wide TACO analysis in a Phase I Soils CMP (Log No. B-16-CA-5), which is currently under review by the Agency. Clean Harbors made their submittal in accordance with the Illinois EPA letter dated April 9, 2003.

In summary, SWMUs 7, 8, part of 9 and 10 are within the process area, shown on attached schematic which has effectively been remediated, subject to the establishment of an engineered barrier and associated institutional control required as part of the interim status closure of the former incinerator and associated units (these requirements are set forth in Illinois EPA's December 21, 2004 letter (Log No. C-759-M-2). The remainder of this portion of the facility is undergoing corrective action and the Illinois EPA is currently reviewing its May 7, 2004 Phase I Soils CMP submittal.

SFN:WRW:bjh\051161s.doc

ATTACHMENT I

RCRA CORRECTIVE MEASURES PROGRAM REQUIREMENTS CLEAN HARBORS SVCS INC

Clean Harbors Svcs Inc

LPC 0316000051

ATTACHMENT I

RCRA Corrective Measures Program Requirements Clean Harbors Svcs Inc B-16R

1.0 BRIEF OVERVIEW OF A RCRA CORRECTIVE MEASURES PROGRAM

Typically, at the end of an RFI, the concentration of contaminants present in the soil/sediments/groundwater/surface waters at a SWMU or other area of concern is compared to remediation objectives developed in accordance with 35 Ill. Adm. Code 742. If the contaminant levels are above these objectives, then some type of corrective measure must be completed to achieve these objectives. In addition, certain corrective measures may need to be carried out to support the established remediation objectives (i.e., the establishment of engineered barriers and/or institutional controls). However, at a unit where waste or high levels of contamination remains, a decision may be made to close the unit as a landfill and then provide post-closure rather than removing the material and/or achieving remediation objectives developed in accordance with 35 Ill. Adm. Code 742.

To allow for a logical and orderly progression in developing and implementing necessary corrective measures, the Corrective Measures Program (CMP) being carried out in accordance with this RCRA permit should be carried out in five phases which build on each other. It is not necessary for a corrective measures program at a given SWMU or other areas of concern to follow these five phases step-by-step; rather, phases can be combined and/or skipped, depending on the actual remedial measure selected. The overall CMP implemented must set forth a logical path for its implementation and allow for Illinois EPA oversight and approval throughout the entire process.

A brief discussion of the five phases of a CMP is as follows:

- 1. Phase I is the conceptual design of the selected corrective measure(s).
- 2. Phase II is the development of final design plans for the corrective measure, including installation and operation/maintenance plans.
- 3. Phase III is the actual construction/installation of the selected corrective measure.
- 4. Phase IV is the operation, maintenance, and monitoring of the selected corrective measure to ensure it is properly protecting human health and the environment.

5. Phase V is the final demonstration/verification that the implemented corrective measure achieved the approved remedial objectives.

Sections 2.0 through 6.0 which follow provide a more detailed discussion of each of these five phases. Section 7.0 has been developed to describe the corrective measures program which may be used in lieu of the afore-mentioned five phase procedure when soil removal is the selected remedy. It must be noted that work plans, reports, etc. must be developed to document how the Permittee carries out the required corrective measures program at each SWMU or other areas of concern. All such documents must be reviewed and approved by Illinois EPA prior to their implementation.

2.0 PHASE I OF THE CMP

Phase I of the CMP includes selection of the corrective measure to be taken and developing a basis for completing the final design of the measure. This effort should be documented in a Conceptual Design Report which describes the proposed corrective measure for each SWMU and other areas of concern and provides a conceptual design for these measures. The main criteria for Illinois EPA review is whether the proposed corrective measures are able to achieve the final cleanup objectives previously established by the Permittee and the Illinois EPA and/or provide the necessary institutional controls to prevent the migration of contaminants from the SWMU of concern. Based upon a review of the Conceptual Design Report, the Illinois EPA may approve the corrective measures, require revisions to the proposed corrective measures, or require that a totally new corrective measures proposal be submitted to the Illinois EPA.

The Conceptual Design Report should contain the following sections:

- 1. <u>Introduction/Purpose</u>. This section should contain: (1) general background information regarding the project; (2) the purpose and goals of the submittal; and (3) the scope of the project.
- 2. <u>Existing Site Conditions</u>. This section should contain a summary of the investigative activities conducted for each of the units of concern. Investigation analytical results should be provided in tabular form, and maps depicting both the horizontal and vertical extent of contamination at the site should be provided.
- 3. <u>Evaluation for Potential Future Migration</u>. Based on the existing site conditions, a conceptual model of the site should be developed and presented in this section. The potential for additional future migration of contamination for each of the units of concern must then be evaluated, especially those units which have been determined to

have released hazardous waste/hazardous constituents to the groundwater. It may be helpful to develop conceptual models for contaminant migration. Of special concern in this evaluation are (1) the physical properties of the contaminants (solubility, volatility, mobility, etc.); and (2) existing site conditions (types of soil present, location of contamination, hydrology, geology, etc.).

- 4. <u>Corrective Measures Objectives</u>. This section should discuss the general objectives of the proposed corrective measure to be constructed/installed, and the ability of the proposed corrective measure to achieve the established remediation objectives (unless the selected corrective measure is closure as a landfill which will require proper establishment of a final cover and proper post-closure care of the closed unit.
- 5. <u>Identification of Options Available</u>. This section should contain a brief discussion of the various options available to achieve the corrective measures objectives for each unit. This discussion should identify: (1) a general overview of each option available, including how the option will achieve the stated objective; (2) the advantages associated with each option; (3) the disadvantages associated with each option and (4) an estimate of the cost associated with choosing each remedial option.
- 6. <u>Description of Selected Corrective Measure</u>. This section should contain a qualitative discussion of the corrective measure chosen, along with the rationale which was used to select this measure from all those identified initially. This discussion should include documentation that the selected corrective measure will be effective.
- 7. <u>Identification of Design Criteria</u>. This section should identify what information must be available to design the selected corrective measure.
- 8. Review of Available Information. This section should contain an evaluation of the existing information to ensure that it is sufficient to complete the design of the selected corrective measure. If insufficient information is available, then the report should contain procedures for collecting the required additional information.
- 9. <u>Procedures for Completing the Design</u>. This section should contain a description of the procedures which will be followed to complete the design of the corrective measure. This should include as appropriate:
 - a. Identification of the references and established guidance which will be used in designing the selected corrective measure. Justification for the selection of this procedure should also be provided.

- b. A description of the procedures which will be used to complete the design of the corrective measure.
- c. Identification of assumptions to be used in the design, and the impact these assumptions have on the overall corrective measure;
- d. Significant data to be used in the design effort;
- e. Identification and discussion of the major equations to be used in the design effort (including a reference to the source of the equations);
- f. Sample calculations to be used in the design effort;
- g. Conceptual process/schematic diagrams;
- h. A site plan showing a preliminary layout of the selected corrective measure;
- i. Tables giving preliminary mass balances;
- i. Site safety and security provisions.

This information will form the technical basis for the detailed design of the remedial measure and the preparation of construction plans/specifications.

- 10. <u>Identification of Required Permits</u>. This section should identify and describe any necessary permits associated with the selected corrective measure, as well as the procedures which will be used to obtain these permits.
- 11. <u>Long-lead Procurement Considerations</u>. This section should identify any elements/components of the selected corrective measure which will require a large amount of time to obtain/install. The following issues should also be discussed: (1) the reason why it will take a large amount of time to obtain/install the item; (2) the length of time necessary for procurement and (3) recognized sources of such items.
- 12. <u>Project Management</u>. This section should contain information regarding the procedures and personnel which will be involved in completing the design of the selected corrective measure. A schedule for completing the design should also be provided.

Once the Illinois EPA approves the Conceptual Design Report, the facility should complete the design of the approved corrective action (Phase II of the CMP). Upon final completion of the design, a Final Design Report, consisting of final plans, specifications, construction work plan, etc., must be submitted to the Illinois EPA for review and approval.

Several documents must be submitted to the Illinois EPA as part of Phase II of the CMP. The following text describes the expected contents of the various documents which should be developed and submitted to the Illinois EPA as part of Phase II of the CMP.

- 1. <u>Final Design Report and Construction Work Plan</u>. The Final Design Report and Construction Work Plan must contain the detailed plans, specifications and drawings needed to construct the corrective measure. In addition, this document must contain (1) calculations, data etc., in support of the final design; and (2) a detailed description of the overall management strategy, construction quality assurance procedures and schedule for constructing the corrective measure. It must be noted that the approved Conceptual Design Report forms the basis for this final report. The information which should be provided in this document includes:
 - a. <u>Introduction/Purpose</u>. This portion of the document should: (1) provide background information regarding the project, (2) describe the purpose and goals of the project, and (3) describe the scope of the project.
 - b. <u>Detailed Plans of the Design System</u>, including the following:
 - 1. Plan views;
 - 2. Section and supplementary views which, together with the specifications and general layouts, facilitate construction of the designed system;
 - 3. Dimensions and relative elevations of structures;
 - 4. Location and outline form of the equipment;
 - 5. Ground elevations; and
 - 6. Descriptive notations, as necessary, for clarity.
 - c. <u>Technical Specifications</u>. Complete technical specifications for the construction of the system, including, but are not limited to, the following:

- 1. All construction information, not shown in the drawings, which is necessary to inform the contractor in detail as to the required quality of materials, workmanship, and fabrication of the project;
- 2. The type, size, strength, and operating characteristics of the equipment;
- 3. The complete requirements for all mechanical and electrical equipment, including machinery, valves, piping and jointing of pipe;
- 4. Electrical apparatus, wiring and meters;
- 5. Construction materials;
- 6. Chemicals, when used;
- 7. Miscellaneous appurtenances;
- 8. Instruction for testing materials and equipment as necessary; and
- 9. Availability of soil boring information.
- d. <u>Project Management</u>. A description of the construction management approach, including the levels of authority and responsibility, lines of communication and qualifications if key personnel who will direct corrective measures construction/installation must be provided in the work plan.
- e. <u>Construction Quality Assurance/Quality Control</u>. A construction quality assurance/quality control plan describing the procedures which will be followed to ensure the corrective measure is constructed/installed in accordance with the approved plans and specifications.
- f. <u>Schedule</u>. The work plan must contain a schedule for completion of all major activities associated with construction/installation of the selected corrective measures. All major points of the construction/installation should be highlighted.
- g. Waste Management Practices. This portion of the document should identify the wastes anticipated to be generated during the construction/installation of the corrective measures, and provide a description of the procedures for appropriate characterization and management of these wastes.

- h. Required Permits. Copies of permit applications submitted to other Bureaus of the Illinois EPA for the selected corrective measure must be provided in the report. If it is determined that no permit is required for construction/installation and implementation of the corrective measures, rationale and justification must be provided to support this contention.
- i. <u>Cleanup Verification</u>. The report must contain the procedures which will be followed that the approved remediation objectives have been achieved when operation of the system is completed.
- 2. Operation and Maintenance Plan. An Operation and Maintenance Plan must be developed and submitted as part of Phase II of the CMP. This plan should outline the procedures for performing operations, long term maintenance, and monitoring of the corrective measure.
 - a. <u>Introduction and Purpose</u>. This portion of the document should provide a brief description of the facility operations, scope of the corrective measures project, and summary of the project objectives.
 - b. <u>System Description</u>. This portion of the document should provide a description of the corrective measure and significant equipment, including manufacturer's specifications. This portion of the permit should also include a narrative of how the selected system equipment is capable of complying with the final engineered design of the corrective measure.
 - c. <u>Operation and Maintenance Procedures</u>. This portion of the document should provide a description of the normal operation and maintenance procedures for the corrective measures system, including:
 - 1. Description of tasks for operation;
 - 2. Description of tasks for maintenance;
 - 3. Description of prescribed treatment or operation conditions; and
 - 4. Schedule showing the frequency of each operation and maintenance task.
 - d. <u>Inspection Schedule</u>. This portion of the document should provide a description of the procedures for inspection of the corrective measures system, including problems to look for during the inspection procedure, specific inspection items, and frequency of the inspections.

- e. <u>Waste Management Practices</u>. This portion of the document should provide a description of the wastes generated by the corrective measure, and the appropriate procedures for proper characterization/management of these wastes.
- f. <u>Contingency Procedures</u>. This portion of the document should provide a description of the procedures which will address the following items:
 - 1. System breakdowns and operational problems including a list of redundant and emergency backup equipment and procedures;
 - 2. Alternative procedures (i.e., stabilization) which are to be implemented in the event that the corrective measure fails. The alternative procedures must be able to prevent release or threatened releases of hazardous wastes/hazardous constituents which may endanger human health and the environment, or exceed cleanup standards.
 - 3. Notification of facility and regulatory personnel in the event of a breakdown in the corrective measures, including written notification identifying what occurred, what response action is being taken and any potential impacts on human health and the environment.

4.0 PHASE III OF THE CMP

Once the final design report is approved by the Illinois EPA, construction/installation of the approved corrective measure must commence. During this period, quarterly reports should be submitted which contain the following information:

- 1. Summary of activities completed during the reporting period;
- 2. An estimate of the percentage of the work completed;
- 3. Summaries of all actual or proposed changes to the approved plans and specifications or its implementation;
- 4. Summaries of all actual or potential problems encountered during the reporting period;
- 5. Proposal for correcting any problems; and
- 6. Projected work for the next reporting period.

Upon completion of construction/installation of the approved corrective measure, a Construction Completion Report must be submitted to the Illinois EPA documenting that these efforts were carried out in accordance with the Illinois EPA approved plans and specifications. This report should contain a thorough description of the efforts that went into constructing/installing the corrective measure and demonstrate that the procedures in the Illinois EPA-approved Final Design Report were followed during this effort. Such a report should be formatted in a logical and orderly manner and contain the following information:

- 1. An introduction discussing the background of the project and the purpose and scope of the corrective measure described in the report.
- 2. Identification of the plans, technical specifications and drawings which were used in constructing/installing the corrective measure. These specifications and drawings should have been approved by the Illinois EPA during Phase II.
- 3. Identification of any variations from the Illinois EPA approved plans, technical specifications and drawings used in construction/installing the corrective measure. Justification regarding the need to vary from the approved plans and specifications must also be provided.
- 4. A description of the procedures used to construct/install the corrective measure, including the procedures used for quality assurance and quality control.
- 5. As-built drawings, including identification of any variations from the approved plans, technical specifications and drawings.
- 6. A summary of all test results from the construction/installation effort, including quality assurance/quality control testing.
- 7. Actual test results, including quality assurance/quality control test results. These results should be located in an attachment/appendix and be well organized.
- 8. Identification of any test results which did not meet the specified value and a description of the action taken in response to this failure, including re-testing efforts.
- 9. Photographs documenting the various phases of construction.
- 10. A detailed discussion of how the construction/installation effort met the requirements of the approved Final Design Report.

11. A certification meeting the requirements of 35 Ill. Adm. Code 702.126 by an independent qualified, licensed professional engineer and by an authorized representative of the owner/operator.

5.0 PHASE IV OF THE CMP

Once the corrective measure has been constructed/installed, it must be operated, maintained and monitored in accordance with the approved plans and specifications (this is Phase IV of the CMP). During this period, quarterly reports must be submitted to the Illinois EPA documenting the results of these efforts. These reports include the following:

- 1. <u>Introduction</u>. -- A brief description of the facility operations, scope of the corrective measures project, and summary of the project objectives.
- 2. <u>System Description</u>. -- A description of the corrective measures constructed/installed at the site, and identify significant equipment. Describe the corrective measure and identify significant equipment.
- 3. Monitoring Results. -- A description of the monitoring and inspection procedures to be performed on the corrective measures. A summary of the monitoring results for the corrective measures, including copies of any laboratory analyses which document system effectiveness, provide a description of the monitoring procedures and inspections performed, and include a summary of the monitoring results for the corrective measure. Copies of all laboratory analytical results which document system monitoring must be provided.
- 4. <u>Effectiveness Determination</u>. -- Calculations and other relevant documentation which demonstrates the effectiveness of the selected corrective measure in remediating/stabilizing contamination to the extent anticipated by the corrective measures final design. Copies of relevant analytical data should be provided to substantiate this determination.
- 5. System Effectiveness Recommendation. -- Based upon the results of the effectiveness determination required under Item 4 above, recommendations on continued operation of the corrective measure must be provided. If the corrective measure is not performing in accordance with the final design, a recommendation on revisions or expansion of the system should be provided.

6.0 PHASE V OF THE CMP

Once all corrective measures have been completed, a report must be developed documenting all the efforts which were carried out as part of implementing the corrective measure and demonstrating, as appropriate, that the approved remediation objectives have been achieved. This report should contain a compilation of all previous reports and also contain sufficient information to demonstrate that the approved remediation objectives have been achieved. It must be noted that such a report will not be developed for a unit closed as a landfill until the post-closure care period has been completed.

7.0 PROCEDURES WHICH SHOULD BE FOLLOWED WHEN SOIL REMOVAL IS THE SELECTED CORRECTIVE MEASURE

Sections 2.0 through 6.0 above describe the procedures which should be followed when it is necessary to design some type of physical corrective measure (e.g., a final cover system, some type of treatment system, etc.). However such detail is not necessary if excavation/removal is selected as the remedial action for the contaminated soil encountered at the site. In general, a work plan should be developed for this effort (for Illinois EPA review and approval) which fully describes each step to be used in removing the contaminated soil from the property. This includes a description of (1) the equipment utilized in the removal effort, (2) the pattern followed in removing the soil; (3) the depth to which the soil will be removed; (4) management of the soil on-site after it is removed from the ground; (5) loading areas; (6) the ultimate destination of the soil; and (7) any other steps critical to the removal effort.

One way to conduct a soil removal effort is to collect and analyze a sufficient number of soil samples to clearly determine the horizontal and vertical extent of soil contamination <u>prior</u> to conducting the soil removal effort. The boundaries of soil which must be removed are defined by the Illinois EPA established cleanup objectives for the project. Soil excavation must extend to sample locations where soil test results indicate that the remediation objectives are met. Closure verification sampling is not necessary in such cases, if a registered professional engineer oversees the soil removal effort and certifies that the remediation limits extend to these boundaries.

Another way to conduct a soil removal effort is to collect and analyze a limited number of soil samples <u>prior</u> to the soil removal effort and to rely mainly on field observation to determine the extent of the soil removal. In such cases closure verification sampling is necessary. Soil samples must be collected for analysis from the bottom and sidewalls of the final excavation. The following sampling/analysis effort is necessary to demonstrate that the remaining soil meets the established cleanup objectives:

- 1. A grid system should be established over the excavation.
- 2. Samples should be collected from the floor of the excavation at each grid intersection, including intersections along the perimeter of the excavation.
- 3. Samples should be collected at 6"-12" below the ground surface (bgs) along the excavation sidewalls at each grid intersection around the excavation perimeter. Samples must also be collected at the midpoint of the excavation wall at each grid intersection along the excavation perimeter.
- 4. Collection/analysis of all required samples must be in accordance with the procedures set forth in the approved plan.
- 5. Soil samples which must be analyzed for volatile organic compounds (VOCs) must be collected in accordance with the procedures set forth in Method 5035 of SW-846. In addition, such samples must be collected 6"-12" beneath the floor/sidewalls of the excavation to minimize the possibility of volatilization of the contaminants prior to the collection of the samples.
- 6. No random sampling may be conducted to verify achievement of cleanup objectives have been met.
- 7. Additional soil must be removed, as necessary, until it can be demonstrated that the remaining soil in and around the area of concern meets the established cleanup objectives. Additional samples must be collected and analyzed in accordance with the procedures described above from areas where additional soil has been removed.

SFN:JF:bjh\051161s.doc

LLD 000 608 471

NOTICE

March 19, 2007

To: Facility Mailing List Addresses

Re: Clean Harbors Services, Inc.

Notification of RCRA Class 1 Permit Modification

MAR 2 0 2007

CHVISION FROM FLOORS DUSION
Waste, Pesticides & Todos Dusion
... U.S. EPA - REGION 5

Clean Harbors Services, Inc. (CHSI) is a permitted hazardous waste treatment, storage and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHSI currently operates under a RCRA Part B permit issued by the IEPA on November 4, 2005.

On December 20, 2006 CHSI requested a Class 1 permit modification to the facility's permit to make an administrative change allowing a Generator's Waste Material Profile Sheet to be submitted electronically, including an electronic signature. This Class 1 modification does not need prior approval by IEPA.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations in 35 IAC 703.281(a)(2) which require a notice of the modification be sent to all persons on the facility mailing list within 90 days after the change is put into effect or within 90 days of IEPA approval.

If you have any further questions regarding this notice, please contact me at (773) 646-6202, x233.

Sincerely,

James R. Laubsted

Facility Compliance Manager



UNITED TATES ENVIRONMENTAL PROTECTION AGENC

77 WEST JACKSON BOULEVARD CHICAGO, IL 60604-3590

MAR 1 6 2005

REPLY TO THE ATTENTION OF:

DW-8.J

CERTIFIED MAIL: 7001 0320 0006 1558 4260 RETURN RECEIPT REQUESTED

James R. Laubsted Clean Harbors Services Inc. 11800 South Stony Island Ave. Chicago, IL 60617

RE: Class 1 Permit Modification Request

Clean Harbors Services Inc.

ILD 000 608 471

Dear Mr. Laubsted:

On March 9, 2005, the United States Environmental Protection Agency (U.S. EPA) received your Class 1 permit modification request to include the newly listed waste (K-181) which became effective on August 23, 2005. The newly listed waste was promulgated by the U.S. EPA under the Hazardous and Solid Waste Amendments of 1984 (70 FR 9137, February 24, 2005). Clean Harbors Services Inc. submitted a Class 1 permit modification to continue to handle this newly listed waste at your hazardous waste management facility.

The U.S. EPA acknowledges the receipt of your Class 1 permit modification request in accordance with 40 CFR § 270.42(g)(ii). Please submit a Class 2 modification request to the U.S. EPA on or before February 20, 2006, in accordance with 40 CFR § 270.42(g)(iv) to continue handling this waste.

If you have any questions on this matter, please contact Mr. James Blough at (312) 886-2967.

Sincerely,

Jose G. Cisneros, Chief

Waste Management Branch

cc: Mark Schollenberger, IL EPA



Certified Mail Provides:

- A mailing receipt
- A unique identifier for your mailpiece
- A signature upon delivery
- A record of delivery kept by the Postal Service for two years

Important Reminders:

- Certified Mail may ONLY be combined with First-Class Mail or Priority Mail.
- Certified Mail is not available for any class of international mail.
- NO INSURANCE COVERAGE IS PROVIDED with Certified Mail. For valuables, please consider Insured or Registered Mail.
- For an additional fee, a Return Receipt may be requested to provide proof of delivery. To obtain Return Receipt service, please complete and attache Return Receipt (PS Form 3811) to the article and add applicable postage to cover the fee. Endorse malipiece "Return Receipt Requested". To receive a fee waiver for a duplicate return receipt, a USPS postmark on your Certified Mail receipt is required.
- For an additional fee, delivery may be restricted to the addressee or addressee's authorized agent. Advise the clerk or mark the mailpiece with the endorsement "Restricted Delivery".
- If a postmark on the Certified Mail receipt is desired, please present the article at the post office for postmarking. If a postmark on the Certified Mail receipt is not needed, detach and affix label with postage and mail.

IMPORTANT: Save this receipt and present it when making an inquiry.

PS Form 3800, January 2001 (Reverse)

102595-01-M-1049

SENDER: COMPLETE THIS SECTION	COMPLETE THIS SECTION ON DELIVERY
Complete items 1, 2, and 3. Also complete it if Restricted Delivery is desired. Phyour name and address on the reverse so that we can return the card to you.	A. Received by (Please Print Clearly) FARENICKER 3-22-05 C. Signature
Attach this card to the back of the mailpiece, or on the front if space permits.	x Farenicker Addressee
Article Addressed to:	D. Is delivery address different from item 1?
James R. Laubsted Clean Harbors Services Inc.	CLEAN HARBORS OF CHICAGO, INC. 11800 South Stony Island Avenue Chicago, Illinois 60617
11800 South Stony Island Ave. Chicago, IL 60617	3. Service Type (312) 646-6202 Certified Mail
	□ Insured Mail □ C.O.D. 4. Restricted Delivery? (Extra Fee) □ Yes
2. Article Number (Transfer from service label) 7001 0	320 0006 1558 4260
PS Form 3811, March 2001 Domestic Ret	turn Receipt 102595-01-M-1424



First-Class Mail Postage & Fees Paid USPS Permit No. G-

Sender: Please print your name, address, and ZIP+4 in this box

James Blough U.S. EPA - Region 5 (DW-8J) 77 West Jackson Chicago, IL 60604 C:\EPAWork\Clean Harbor\2005 class modes\class 1 mode CHSI k181.wpd

Waste Management Branch

SECRETARY	SECRETARY	SECRETARY	SECRETARY
AUTHOR	TSPS CHIEF	WMB CHIEF	WPTD DIRECTOR
A	3/15/05	X 315/0	

may 3/14/05 wers

may 3/14/05



11800 South Stony Island Avenue Chicago, IL 60617 773.646.6202 Fax 773-646-6381 www.cleanharbors.com Via Overnight Delivery

March 8, 2005

Mr. James Blough U.S. Environmental Protection Agency RCRA Permit Section, Mail Code DW-8J 77 West Jackson Boulevard Chicago, IL 60604

Dear Mr. Blough:

Clean Harbors Services, Inc. (CHSI) is submitting a Class 1 permit modification request to the facility's RCRA Part B Permit for authority to manage a newly listed hazardous waste finalized by USEPA on February 24, 2005 (see Federal Register Volume 70, Number 36). The newly listed waste is nonwastewater from the production of dyes and/or pigments that, at the point of generation, contain mass loadings of any of the constituents identified in paragraph (c) of section 261.32 that are equal to or greater than the corresponding paragraph (c) levels, as determined on a calendar year basis and is identified by USEPA waste code number K181. The new code becomes effective August 23, 2005

In accordance with the requirements of 40 CFR 270.42(g), CHSI is enclosing a revised Part A form to notify the Agency of CHSI's intent to manage the new waste code. Within 90 days CHSI shall notify all persons on the facility mailing list of this Class 1 permit modification request. In addition, within 180 days of the effective date, CHSI shall submit a Class 2 modification request for final Agency approval.

If you have any questions or require additional information, please contact me at (773) 646-6202, x233.

Sincerely,

James R. Laubsted

Facility Compliance Manager

-n. Tets

		Plea	ise pi	0, 19				- (-)								,		- (GSA I	lo. 02	48-EP/	1-OT	
		F		PA Regi		•				Unit	ed S		Env				ectio	n Age	ency											
								1					Vashi	-															·	
ha .									H	łaz	zar	do	ous	s V	Va	ste	P	eri	mi	t										
		[Date	Recei	ved			}				Δ	/bt	olic	at	io	n													
М	onth			- "	Yea	r							F	ar	t A	1														
												(Rea	d the Ir	structi	ons be	fore st	arting)													
l. I	aci	lity'	s EF	A ID N	lumbe	er (N	lark	'X'	in tl	he a	ppr	opr	iate	box,)											• • • •	•			-2
		Α.	First	t Part	A Sub	mis	sior	1				х	В. І	Revi	sed	Pa	t A	Sub	mis	sior	ı (Aı	men	dm	ent	#	4				
C.	Fac	ility'	s El	PA ID I	Numb	er						D.	Sec	onda	ary I	D N	uml	ber (If a	ppli	cabi	le)								
-	L	D	0	0	0	6	0	8	4	7	1																			·
11.	Nar	ne o	f Fa	cility																										-
С	L	Е	Α	N		Н	Α	R	В	0	R	s		s	Е	R	٧	ı	С	E	s		1	N	С					
111.	Fac	ility	/ Lo	cation	(Phys	sical	ad	dres	ss n	ot P	.O. I	Вох	or	Rou	te N	um	ber)											•		<u> </u>
Α.	Stre	et																			-			_		•				
1	1	8	0	0		s	0	υ	Т	Н		s	Т	0	Ν	Υ		ı	S	L	Α	Ν	D		Α	V	Ē.	N	U	Ē
Str	eet	(Co	ntin	ued)																										
•		Ì																												
Cit	A OI	To	٧n						•						•			Sta	ite	Zip	Cod	de					•	•	•	
Ç	Н	1	С	Α	Ģ	Ō							Ĭ							6	0	6	1	7	_					<u> </u>
												1	I	1				1	Ŀ	U) ~			•						
	nty C	ode		Coun	ty Nar	ne	1						<u> </u>					i	Ļ	O .		Ů		<u>, </u>			<u> </u>	<u>. </u>		·
	-	ode	<u> </u>	Γ_	1	Τ.	<u>'</u>		1	1		1	I,						<u> </u>				· ·	•					1	<u>.</u>
Cou (if kn	own)			С	0	0	K]	<u> </u>						<u> </u>								L]	
Cou (if kn	Lan	d Ty	-	C C. Ge	O ograp	O hic	Loc	secon	ds)				SITUDE	<u> </u>				_ ′	<u> </u>			Fac		Ex	iste ay	nce Yea		te		
Cou (if kn	Lan	d Ty	-	C C. Ge	O ograp	O hic	Loc						GITUDE	<u> </u>			& sect	_ ′	<u> </u>		D.	Fac		Ex				te 8	0	
Cou (if kn	Lan	d Ty)	C. Ge	O ograp	O hic s, minu	Loc	secon	ds)					<u> </u>				_ ′			D.	Fac		/ Ex	ay		<u>r</u> .	-	0]
Cou (if kn	Lan (Ext	d Ty) Ma	C. Ge	O ograp	O hic s, minu	Loc	secon	ds)					<u> </u>				_ ′			D.	Fac		/ Ex	ay		<u>r</u> .	-	0	
Cou (if kn	Lan (Ext	d Ty) Ma	C. Ge	O ograp	O hic s, minu	Loc ites, &	second 5	ds)	Н		0		3	4			_ ′	S	L	D.	Fac	ility 7	/ Ex	ay		9	8	0	
B.	Lan (Fac	d Ty	Ma .O .	C. Ge LATITUDE 4 iling A Box	O ograp	O hic s, minu 4	Loc ites, &	second 5	ds)	Н		0	8 7	3	4	0	4 6	_ ′			D. Mon	Fac th 0	ility 7	/ Ex	9	Yea 1	9	8	0	
B.	Lan (Fac	d Ty	Ma .O .	C. Ge	O ograp	O hic s, minu 4	Loc ites, &	second 5	ds)	Н		0	8 7	3	4	0	4 6				D. Mon	Fac th 0	ility 7	2 Ex	9	Yea 1	9	8	0	
B. IV. Str 1 Cit	Factor of H	d Ty	Ma .O. 0 wn	C. Ge	O ograp © (Degrees) 1 ddres	O hic s, minu 4 0	Loc tes, &	Second 5	(ds) 4			s	8 7 T	o 3	N	Y	4 6	 Stat	ie L	L Zip	D. Mon	Fac th 0	7 D	2 Ex	9	Yea 1	9	8	0	
B. IV. Str Cit C	Lan Fac eet 1 Fac	d Ty	Ma .O. 0 wn C	C. Ge LATITUDE 4 Illing A Box 0	O ograp © (Degrees) 1 ddres	O hic s, minu 4 0	Loc tes, &	Second 5	(ds) 4			s	8 7 T	o 3	N N	Y	4 6	 Stat	ie L	L Zip	D. Mon	Fac th 0	7 D	2 Ex	9	Yea 1	9	8	0	
B. IV. Str Cit C	Lan Fac eet 1 Fac	d Ty	Ma .O. 0 wn C	C. Ge LATITUDE 4 Box 0 A ntact (O ograp © (Degrees) 1 ddres	O hic s, minu 4 0	Loc tes, 4	Second 5	(ds) 4			s	8 7 T	o 3	N N	Y	4 6	Stat	ie L	L Zip	D. Mon	Fac th 0	7 D	2 Ex	9	Yea 1	9	8	0	
IV. Str Cit C V. Na	Factor H Fac	d Ty	Ma O O Wn C	C. Ge LATITUDE 4 Box 0 A ntact (O ograp E (Degrees 1 ddres G Perso	hic s, minu 4 (Loc tes, 4	Second 5	(ds) 4			s	8 7 T	o 3	N N e ac	Y tivit A	4 6	Stat	L Cili	L Zip 6	D. Mon	Fac th 0 N de 6	7 D	/ Ex D	ау 9 А	Yea 1	9	8	0	
IV. Str Cit C V. Na	Faceet 1 Facemee A	d Ty	Ma O.O. O Wn C Co B B	C. Ge LATITUDE 4 Box 0 A ntact (O ograp E (Degrees 1 ddres G Perso	hic s, minu 4 (Loc tes, 4	U	ds) 4			S		o 3	N N e ac	Y tivit A	4 6	Stat	L Cili	L Zip 6	D. Mon	Fac th 0 N de 6	7 D	/ Ex D	ау 9 А	Yea 1	9	8	0	
B. IV. Str C V. Na L Jo	Facet 1 Facet A Tilde A	d Ty core ility or P 8 Tov ility U ttle M	Ma .O. 0 wn C Co b) B	C. Ge LATITUDE 4 Box 0 A ntact (ograp (Degrees 1 ddres G Perso	o hic s, minu 4 (Loc tes, & O D D D N	U COM	ds) T tact	ted i	rega M	S		o 3	N N Pho	Y tivit A one	iies M	Stat	L Cilin	L Zip 6	D. Mon	Fac th 0 N de 6	7 D and N	7 Ex DD 2	9 A	Yea 1	9	8	0	
B. IV. Str 1 Cit C V. Na L Joi C VI. A.	Factor of the control	d Ty code illity or P 8 Tov (lassi U ttle M illity	Ma O.O. O Wn C Con B	C C. Ge ATITUDE A Box O A ntact (ograp (Degrees 1 ddress G Perso T	O hic s, minute 4 (0 ss S	O be	C Inst	T E	ted i	mega M	S		o 3	N N Pho	Y tivit A one	iies M	Stat	L Cilin	L Zip 6	D. Mon	Fac th 0 N de 6	7 D and N	7 Ex DD 2	9 A	Yea 1	9	8	0	
B. IV. Str 1 Cit C V. Na L Joi C VI. A.	Factor of the control	d Ty illity or P 8 Tov	Main Date of the Control of the Cont	C C. Ge ATITUDE A Box O A ntact (ograp (Degrees 1 ddres G Perso	O hic s, minute 4 (0 ss S	O be	C Inst	T E	ted i	mega M	S		o 3	N N Pho	Y tivit A one	iies M	Stat	L Cilin	L Zip 6	D. Mon	Fac th 0 N de 6	7 D and N	7 Ex DD 2	9 A	Yea 1	9	8	0	
B. IV. Str C V. Na L C VI. A.	Factor A A B Tild Correction	d Ty code illity or P 8 Tov	Ma O C Co B P Co Ad	C C. Ge ATITUDE A Box O A ntact (ograp (Degrees 1 ddress G Perso T	O hic s, minute 4 (0 ss S	O be	C Inst	T E	ted i	mega M	S		o 3	N N Pho	Y tivit A one	M Nun	Stat I E	S (A)	L Zip 6 ty)	D. Mon	Factor N de 6	7 D and N	7 Ex DD 2	9 A	Yea 1	9	8	0	
B. IV. Str C V. Na L C VI. A.	Factor A A B Tild Correction	d Ty code illity or P 8 Tov	Ma O C Co B P Co Ad	C C. Ge ATITUDE A Box O A ntact (ograp (Degrees 1 ddress G Perso T	O hic s, minute 4 (0 ss S	O be	C Inst	T E	ted i	mega M	S		o 3	N N Pho	Y tivit A one	M Nun	Stat	S (A)	L Zip 6 ty)	D. Mon	Factor N de 6	7 D and N	7 Ex DD 2	9 A	Yea 1	9	8		

Please print or type with ELITE type (12 of orm approved, OMB No. 2050-0034 Expires 10/31/02 acters per inch) in the unshaded areas only GSA No. 0248-EPA-OT EPA ID Number (Enter from page 1) Secondary ID Number (Enter from page 1) 1 D 0 6 0 8 4 Operator Information (See instructions) ame of Operator R В R S С Εl 0 C Α Street or P.O. Box S 1 8 0 0 0 S Ν City or Town State Zip Code C Н C G 0 6 0 6 B. Operator C. Change of Operator **Date Changed** Phone Number (Area Code and Number) Indicator Type Month Day Year P 2 2 7 3 6 6 0 X Yes No VIII. Owner Information (See instructions) A. Name of Owner S Ν Т Ρ R Т D S R C L 0 0 Т 1 Street or P.O. Box 3 6 0 0 E S 9 5 S R Ε Ε Т City or Town State Zip Code C Н O 6 0 1 G B. Owner Type C. Change of Owner **Date Changed** Phone Number (Area Code and Number) Indicator Month Day Year Р 4 4 0 0 7 7 3 6 6 Yes No Х IX. NAICS Codes (in order of significance; start in left box) 9 **First** 9 9 9 **Third** Waste Treatment (Description) (Description) 9 Second 5 **Fourth REFUSE SYSTEMS** (Description) (Description) X. Other Environmental Permits (See instructions) A. Permit Type **B. Permit Number** C. Description (Enter Code) IEPA RCRA PART B 1 6 R В 7 L D 0 0 0 6 0 8 4 1 USEPA HSWA PERMIT 8 0 3 6 Р IEP A (OPERATIONS) 1 9 0 LAND 9 8 4 Ε Р 0 8 8 9 IEP.A LAND (OPERATIONS) 1 0 3 1 6 0 0 В T Ε IEP A AIR 9 9 0 Ε 3 IEPA WATER POLLUTION CONTROL 1 N 1 0

EPA ID Number (Enter from page 1)

Secondary ID Number (Enter from page 1)

XL Nature of Business (Provide a brief description)

Harbors Services, Inc. (CHSI) offers a liquid industrial waste treatment service. CHSI accepts hazardous and non-hazardous wastewaters which do not meet sewer discharge specifications. Through physical and chemical treatment, CHSI produces an effluent acceptable for sewer discharge and a dewatered sludge. The effluent is discharged into the Metropolitan Water Reclamation District of Greater Chicago's sewer system and the sludge is shipped to properly-licensed offsite treatment and/or disposal facilities. CHSI also accepts hazardous and non-hazardous

waste, which is stored in tanks and containers and subsequently transferred to properly licensed offsite treatment and/or disposal facilities.

XII. Process Codes and Design Capacities

- A. PROCESS CODE Enter the code from the list of process codes below that best describes each process to be used at the facility. Thirteen lines are provided for entering codes. If more lines are needed, attach a separate sheet of paper with the additional information. For "other" processes (i.e., D99, S99, T04 and X99), describe the process (including its design capacity) in the space provided in item XII.
- B. PROCESS DESIGN CAPACITY For each code entered in column A, enter the capacity of the process.
 1 AMOUNT Enter the amount in a case where design capacity is not applicable (such as in a closure/post-closure or enforcement action) enter the total amount of waste for that process.
 - 2 UNIT OF MEASURE for each amount entered in column B(1) enter the code from the list of unit measure codes below that describes the unit of measure used. Only the units of measure that are listed below should be used.
- C. PROCESS TOTAL NUMBER OF UNITS Enter the total number of units used with the corresponding process code.

		APPROPRIATE UNITS OF
PROCESS		MEASURE FOR PROCESS
CODE	PROCESS	DESIGN CAPACITY
D/9	Underground Injection	Gallons; Liters; Gallons Per Day; or Liters
	Well Disposal	Per Day
DBO	Land Fill	Acre-teet; Hectare-meter; Acres; Cubic Meters; Hectares; Cubic Yards
D81	Land reatment	Acres or Hectares
D82	Ucean Disposal	Gallons Per Day or Liters Per Day
D83	Surface Inpoundment	Gallons; Liters; Cubic Meters; or
	Disposal	Cubic Yards
D99	Other Disposal Storage:	Any Unit of Measure Listed Below
S01	Container	Gallons; Liters; Cubic Meters; or Cubic Yards
502	Lank Storage	Gallons: Liters; Cubic Meters; or Cubic Yards
503	Waste Hile	Cubic Yards or Cubic Meters
S04	Surface Impoundment Storage:	Gallons; Liters; Cubic Meters; or Cubic Yards
S05	Dnp Pad	Gallons; Liters; Acres; Cubic Meters
-		Hectares; or Cubic Yards
S06	Containment Building Storage	Cubic Yards or Cubic Meters
S99	Other Storage	Any Unit of Measure Listed Below
101	lank ireatment	Gallons Per Day; Liters Per Day; Short Tons Per Hour; Gallons Per Hour; Liters Per Hour; Pounds Per Hour; Short Tons Per Day; Kliograms Per Hour; Metnc Tons per Day; or Metnc Tons Per Hour
102	Surface Impoundment Treatment	Gallons Per Day; Liters Per Day; Short Tons Per Hour; Gallons Per Hour; Liters Per Hour; Pounds Per Hour; Short Tons Per Day; Kilograms Per Hour; Metinc Tons per Day; or Metinc Tons Per Hour
103	incinerator	Short Ions Per Hour, Metric Ions Per Hour; Pounds Per Hour; Short Ions Per Day; Kilograms Per Hour; Gallons Per Day; Liters Per Day; Meric Ions Per Hour; or Million Btu Per Hour
104	Other Treatment	Gallons Per Day; Liters Per Day; Pounds Per Hour; Short Tons Per Hour; Kilograms Per Hour; Metnc Tons Per Day; Metnc Tons Per Hour; Short Tons Per Day; Btu Per Hour; Gallons Per Day; Liters Per Hour; or Million Btu Per Hour
180	Boiler	Gallons; Liters; Gallons Per Hour; Liters Per Hour; Btu Per Hour; or Million Btu Per Hour

		APPROPRIATE UNITS OF
PRO	CESS	MEASURE FOR PROCESS
COD	E PROCESS	DESIGN CAPACITY
T81	Cement Kiln	Gallons Per Day; Liters Per Day;
182	Lime Kiln	Pounds Per Hour; Short Tons Per
183	Aggregate Kıin	Hour; Kilograms Per Hour; Metric
	Phosphate Kiln	Ions Per Day; Metric Ions Per Hour
185	Coke Oven	Short Tons Per Day; Btu Per Hour
186	Blast Furnace	Liters Per Hour; Kilograms Per Hour;
		or Million Btu Per Hour
187	Smelting, Melting	
	Or Retining Furnace	
188	Litanium Dioxide	
	Uhloride Uxidation Reactor	
189	Methane Reforming	Gallons Per Day, Liters Per
	-urnace	Day; Ppounds Per Hour; Short Tons
190	Pulping Liquor Recovery	Per Hour; Kilograms Per Hour;
	<i>⊢urnace</i>	Metric Lons Per Day, Metric Lons
191	Combustion Device Used	Per Hour; Short Tons Per Day; Btu
	In The Recovery Of Sulfur	Per Hour; Gallons Per Hour; Liters
	Values ⊢rom Spent Sulfunc	Per Hour; or Million Btu Per Hour
	Acid	
192	Halogen Acid Furnaces	
193	Other Industnal Furnaces	
	Listed in 40 CFR 260.10	
194	Containment Building -	Cubic Yards; Cubic Meters; Short
134	reatment	I ons Per Hour; Gallons Per Hour;
	Treatment	Liters Per Hour; Btu Per Hour;
		Pounds Per Hour; Short Tons Per
		Day; Kilograms Per Hour; Metric
		I ons Per Day; Gallons Per Day;
		Liters Per Day, Metric Lons Per Hour;
		or Million Btu Per Hour
	Miscellaneous (Subpart X):	Or Miniori Dia r di Frigar
XU1	Open Burning/Open	Any Unit of Measure Listed Below
	Detonation	,, tim of modelate below bolow
X02	Mechanical Processing	Short Tons Per Hour; Metric Tons Per
		Hour, Short Ions Per Day, Metric Ions
		Per Day;Pounds Per Hour;Liters Per Hour;
		or Gallons Per Day
ХUЗ	i hermal Unit	Gallons Per Day; Liters Per Day; Pounds
		Per Hour; Short Lons Per Hour; Kilograms
		Per Hour; Metric Tons Per Day; Metric
		ions Per Hour;Short Tons Per Day;Btu
		Per Hour; or Million Btu Per Hour
XU4	Geologic Repository	Cubic Yards Cubic Meters; Acre-feet;
		Hectare-meter; Gallons; or Liters
X99	Other Subpart X	Any Unit of Measure Listed Below

Unit of	Unit of
Measures	Measure Code
Gallons	G
Gallons Per Hour	E
Gallons Per Day	U
Liters	L
Liters Per Hour	н
Liters Per Day	V

Unit of	Unit of
Measure	Measure Code
Short Tons Per Hour	D
Metric Lons Per Hour	w
Short Tons Per Day	N
Metric Lons Per Day	S
Pounds Per Hour	J
Kilograms Per Hour	ĸ
willion blu ret nout	

Unit of	Unit of
Measure	Measure Code
Cubic Yards	У -
Cubic Meters	c .
Acres	ʁ
Acre-feet	A
Hectares	Q
Hectare-meter	<i>F</i>
btu ⊭er ⊓our	t

orm approved, OMB No. 2050-0034 Expires 10/31/02 Please print or type with ELITE type (12 o facters per inch) in the unshaded areas only GSA No. 0248-EPA-OT EPA ID Number (Enter from page 1) Secondary ID Number (Enter from page 1) 6 0 8 4 | L | D | 0 | XII. Process Codes and Design XAMPLÉ FOR COMPLETING ITEM XII (shown in line number X-1 below): A facility has a storage tank, which can hold 533.788 Line Process B. Process Design Capacity C. Process For Official Number 1. Amount (Specify) 2. Unit of Code Total Use Only Measure Number Of Units (Enter code) 0 3 8 s 2 3 G 0 1 1 S 0 1 164,253 (2969x55-Gal Equivalent 2 X 64 cu.ft.) G 2 9 7 1 2 S 360 (12 x 30 Cubic yards equivalent) 0 Υ 0 1 2 s 268,800 (TRANSPORTATION VEHICLES) 3 0 1 U 0 3 1 G 4 S 0 2 6 3 5 6 0 7 3 2 0 0 0 0 0 0 G 5 D 8 3 0 0 4 6 1 Α 2 0 0, 0 0 0 U 0 0 7 8 9 0 1 2 3 NOTE: If you need to list more than 13 process codes, attach an additional sheet(s) with the information in the same format as above. Number the lines sequentially, taking into account any lines that will be used for "other" processes (I.e., D99, S99, T04 and X99) in item XIII. XIII. Other Processes (Follow instructions from item XII for D99, S99, T04 and X99 process codes) **B. PROCESS DESIGN CAPACITY** C. Process Line **Process** Number Code 1. Amount (Specify) 2. Unit of Total D. Description of Process Measure Number (Enter #s ir Of Units (Enter code) Х T 0 7 Т 0 1 2 0 0 U T-04-A Treatment of D002 liquid/solid 0 mixtures in containers by removal of liquid 8 Т 0 0 0 U 0 0 T-04-B Compaction of hazardous waste solids in containers 9 τ 0 υ 0 0 T04-C Hazardous waste fuel blending 0 0 0

U

T-04-D Stabilization/fixation of hazardous

waste in rolloff containers,

0 0

0 T 0

EP/	A ID) Nu	mbe	er <i>(Ent</i>	ter fro	m p	àge	1)	_			 Se	con	dary	ID N	lumb	er (E	nter	fror	n pa	ige 1	
_	L	D	0	0	0	6	0	8	4	7	1	 -										

XIV. Description of Hazardous Wastes

PA HAZARDOUS WASTE NUMBER - Enter the four-digit number from 40 CFR, Part 261 Subpart D of each listed hazardous waste you will handle. For hazardous wastes which are not listed in 40 CFR, Part 261 Subpart D, enter the four-digit number(s) from 40 CFR, Part 261 Subpart C that describes the characteristics and/or the toxic contaminants of those hazardous wastes.

- B. ESTIMATED ANNUAL QUANITITY For each listed waste entered in column A estimate the quantity of that waste that will be handled on an annual basis. For each characteristic or toxic contaminant entered in column A estimate the total annual quantity of all the non-listed waste(s) that will be handled which possess that characteristic or contaminant.
- C. UNIT OF MEASURE For each quantity entered in column B enter the unit of measure code. Units of measure which must be used and the appropriate codes are:

ENGLIS UNIT OF MEASURE	CODE	METRIC UNIT OF MEASURE	CODE
POUNDS	P	KILOGRAMS	К
TONS	au	METRIC TONS	М

If facility records use any other unit of measure for quantity, the units of measure must be converted into one of the required units of measure taking into account the appropriate density or specific gravity of the waste.

D. PROCESSES

1. PROCESS CODES:

For listed hazardous waste: For each listed hazardous waste entered in column A select the code(s) from the list of process codes contained in item XII. A. on page 3 to indicate how the waste will be stored, treated, and/or disposed of at the facility.

For non-listed hazardous waste: For each characteristic or toxic contaminant entered in column A. select the code(s) from the list of process codes contained in item XII A. on page 3 to indicate all the processes that will be used to store, treat and /or dispose of all the non-listed hazardous wasted that prossess that characteristic or toxic contaminant.

NOTE: THREE SPACES ARE PROVIDED FOR ENTERING PROCESS CODES. IF MORE ARE NEEDED:

- 1 Enter the first two as described above.
- 2 Enter "000" in the extreme right box of item XIV-D(1).
- 3 Use additional sheet, enter line number from previous sheet, and enter additional code(s) in item XIV-E.
- PROCESS DESCRIPTION; If a code is not listed for a process that will be used, describe the process in the space provided on the form (D(2).

NOTE; HAZARDOUS WASTED DESCRIBED BY MORE THAN ONE EPA HAZARDOUS WASTE NUMBER - Hazardous wastes that can be described by more than one EPA Hazardous Waste Number shall be described on the form as follows:

- Select one of the EPA Hazardous Waste Numbers and enter it in column A. On the same line complete columns B, C and D by estimating the total annual quantity of the waste and describing all the processes to be used to treat, store, and/or dispose of the waste.
- In column A of the next line enter the other EPA Hazardous Waste Number that can be used to describe the waste. In column D(2) on that line enter "included with above" and make no other entries on that line.
- 3 Repeat step 2 for each EPA Hazardous Waste Number that can be used to describe the hazardous waste.

EXAMPLE FOR COMPLETING ITEM XIV (shown in line number X-1, X-2, X-3, and X-4 below) - A facility will treat and dispose of an estimated 900 pounds per year of chrome shavings from leather tanning and finishing operation. In addition, the facility will treat and dispose of three non-listed wastes. Two wastes are corrosive only and there will be an estimated 200 pounds per year of each waste. The other waste is corrosive and ignitable and there will be an estimated 100 pounds per year of that waste. Treatment will be in an incinerator and disposal will be in a landfill.

	T			A. EP	A	B. Estimated	C. Unit of									D. P	ROCESSES
Line Numbe			٧	AZARD NASTE Enter Co	NO.	Annual Quantity of Waste	Measure (Enter code)	(1) PROCESS CODES (Enter code)									(2) PROCESS DESCRIPTION (If a code is not entered in D(1))
$X \perp$	11	K	0	5	4	900	Р	T	0	3	ם	8	0				
7	RI	Ď	0	0	2	400	P	T	0	3	D	8	0				
		D	0	0	1	100	P	Ţ	0	3	D	8	0				
X	4 [Ď	0	Ö	2												Included With Above

EPA ID Number (Enter from page 1)														Sec	ond	lary	ID I	lum	ber	(En	ter	fror	n pa	ige	1)	
I	L	D	0	0	0	6 0 8	4 7 1																			
	Pe	escr	iptic	n of H	lazard	ous Wastes	s (Continue	d; ι	ıse a	add	ition	al s	hee	ts a	s ne	ces	sarj	1)								
				A. EP	A	B. Estimated	C. Unit of									D. P	ROC	ESŞI	ES						=	
		•	Н	AZARD	ous	Annual	Measure				-															
Lii	ne		٧	VASTE I	NO.	Quantity	(Enter	(1) PR	ROCE	SS C	ODE	S (E	nter	code	;)	(2	PRO				RIPT enter		ı D(1		(If a
Nun	nber		(1	Enter Co	de)	of Waste	code)																			
		D	0	0	1	15,000	Т	အ 	0	1	S	0	2		0	4		_		_	JK	то	1A	X9	9A	В
.		D	0	0	2	5,000	Т	S	0	1	s	0	2	Т	0	4	\vdash	\dashv	FG			·	ļА	-	9 <u>B</u>	
<u> </u>	3	_		0	3	5,000	Т	S	0	1	s	0	2	Т	0	4	H	CE		HI	7	-	1A		9B	С
H	. 4	D	0	0	4	5,000	Т	s	0	1	s	0	2	T	0	4		_	EF		_	то	<u>1</u> A	Х9	9A	В
Ш	5	H	0	0	5	250	Т	S	0	1	s	0	2	Ţ	0	4	\vdash	-	EF	$\overline{}$		то	1A	Х9	9A	ВС
Ш	6	D	0	0	6	250	T	Ş	Ō	1	s	Ó	2	T	0	4	ΑВ	CD	EF	GH	7	то	1A	Х9	9A	ВС
Щ	7	D	0	0	7	250	Т	S	0	1	S	0	2	Т	0	4	\vdash		ĘF	_	Ė	ŢQ	1A	Х9	9A	В
Ш	8	D	0	0	8	250	Т	S	0	1	s	0	2	Т	0	4	ΑВ	CD	EF	GH	J	ТО	1A	Х9	9A	вс
Ш	9	D	0	0	9	250	Т	s	0	1	S	0	2	Т	0	4	ΑB	CD	ΕF	GH	J	то	1A	Х9	9B	C
1	0	D	0	1	0	250	Т	s	0	1	S	0	2	Τ	0	4	ΑB	CD	EF	GH	J	то	1A	Х9	9B	
_1	1	מֵ	Ò	1	1	250	, T	Ş	0	1	S	0	2	Ţ	0	4	ΑB	CD	EF	GH	7	то	1A	Х9	9B	
۲	2	D	0	1	2	250	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
_1	3	D	0	1	3	250	Т	S	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
_1	4	D	0	1	4	250	Т	s	0	1	s	0	2	Τ	0	4	ΑВ	CE	FĢ	HJ				Х9	9 <u>B</u>	
1	5	D	0	1	5	250	Т	S	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
1	6	D	0	1	6	250	Т	s	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	ΗJ				Х9	9B	
	7	D	0	1	7	250	Т	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ			•	Х9	9B	
_1	8	D	0	1	8	15,000	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ	,	ŢQ	<u>1A</u>	Х9	9A	В
	9	Ď	0	1	9	15,000	Т	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ		то	1A	Х9	9A	В
2	0	D	0	2	0_	15,000	Т	s	0	1	S	0	2	Т	0	4			FG						9A	В
2	1	D.	0	2	1	15,000	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ		то	1A	Х9	9A	В
2	2	D	0	2	2	15,000	Т	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ		то	1A	Х9	9A	Ŗ,
2	3	D	0	2	3	15,000	Т	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ		то	1A	Х9	9A	В
2	4	D	0	2	4	15,000	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ		ТО	1A	X 9	9A	В
2	5	D	0	2	5	15,000	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ		то	1A	Х9	9A	В
2	6	D	0	2	6	15,000	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ		ΤQ	1A	X 9	9A	B
2	7	D	0	2	7	15,000	Т	S	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ		то	1A	Х9	9A	В
2	8	D	Ō	2	8	15,000	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ		то	1A	Х9	9A	В
2	9	D	0	2	9	15,000	Т	S	0	1	S	0	2	T	0	4	ΑB	CE	FG	HJ		то	1A	Х9	9A	В
3	0	Ď	0	3	0	15,000	Т	S	0	1	S	Ō	2	T	Q	4	Α <u>B</u>	CE	FĢ	HJ		ΤO	<u>1</u> A	X9	9A	В
3	1	D	0	3	1	15,000	· T	S	0	1	S	0	2	Ţ	0	4	ΑВ	CE	FG	HJ				X9	9A	В
3	2	D	0	3	2	15,000	Т	S	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ		то	1A	Х9	9A	В
3	_3	D	0	3	3	15,000	Т	s	0	1	s	0	2	T	0	4	ΑВ	CE	FG	HJ		ΤO	1A	X9	9 <u>A</u>	В
		D	0	3	4	15,000	Т	S	0	1	s	0	2	T	0	4	ΑВ	CE	FG	HJ		то	1A	Х9	9A	В
3	5	D	0	3	5	15,000	Т	S	0	1	s	0	2	Т	0		ΑВ	_	=		_	_	_	_	9A	В
			_		•			·															_	•		

EP#	A IE) Nu	mbe	r (Ent	er fro	m page 1)								Sec	ond	arv	ID I	Num	ber	(Er		gsa n fron				
	L	D	0	0	0	T T T	3 4 7 1													Ì				Ť	ÍΠ	
7	_	escr	iptic	n of H	azaro		es (Continu	ed; ι	ıse a	add	itior	al s	hee	ts a	s ne	ces	sar	V)			1					
	7		-	A. EP	A	B. Estimate	d C. Unit of	Ė						•		D. P	ROC	ESSI	ES							
			н	AZARD	ous	Annual	Measure														<u> </u>				•	-
Liı	ne			VASTE		Quantity	(Enter	(1) PR	OCE	ess c	CODE	ES (E	nter	code)	(2) PR(RIPT enter		n D/1		(If a
Num	ıbeı		(E	Enter Co	ode)	of Waste	code)													16 13	,,,,,	enter	eu n	, D()	"	
	1	D	0	3	6	15,000	Ť	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ		то	1A	Х9	9A	В
	2	D	0	3	7	15,000	Т	s	0	1	S	0	2	Т	0	4	ΑB	CE	FĢ	ΗJ		ТО	1A	X9	9A	В
	3	D	0	3	8	15,000	Т	s	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ		то	1A	Х9	9A	В
	4	Ď	0	3	9	15,000	T	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ		то	1A	Х9	9A	В
	5	D	0	4	0	15,000	Т	s	0	- 1	S	0	2	Τ	0	4	ΑB	CE	FG	HJ		то	1A	Х9	9A	В
	6	D	0	4	1	15,000	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ		то	1A	Х9	9B	
	7	D	0	4	2	15,000	T	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ		ΤO	1 <u>A</u>	Х9	<u>9</u> B	
	8	D	0	4	3	15,000	Т	s	0	1	s	0	2	Τ	0	4	ΑB	CE	FG	HJ		то	1A	X9	9A	В
	9	F	0	0	1	7,500	Т	s	0	1	s	0	2	Ť	0	4	ΑB	CE	FG	HJ		то	1A	Х9	9B	
1	Q	F	0	0	2	7,500	Т	s	0	1	S	0	2	Т	0	4	ΑB	CE	FĢ	HJ		TO	1A	Х9	9B	
_1	1	F	0	0	3	7,500	Т	s	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ		то	1A	Х9	9B	
1	2	F	0	0	4	7,500	T	s	0	1	s	0	2	Т	0	4	ΑŖ	ÇE	FG	ΗJ		ΤQ	1 <u>A</u>	Х9	9 <u>B</u>	
1	3	F	0	0	5	7,500	Т	s	0	1	s	0	2	T	0	4	ΑВ	CE	FG	HJ		то	1A	Х9	9B	
1	4	F	Q	Õ	6	1,000	Т	s	0	1	Ş	0	2	T	0	4	Α <u>B</u>	ČĎ	EF	ĢН	J	ΤŌ	1 <u>A</u>	X9	9 <u>B</u>	
1	_	F	0	0	7	1,000	Т	s	0	1	s	0	2	T	0	4	ΑB	CD	EF	GH	J	то	1A	Х9	9B	
1		F	0,	0	8	1,000	Ţ	s	0	1	S	0	2	Τ.	0	4			<u>E</u> F	_	_	TO			9B	
1		F	0	0	9	1,000	T	s	0	1	s	0	2	T	0	4			EF			-		Х9	9B	
1		F	0	1	0	1,000	T	s	Ō	1	s	0	2	Τ	0	4			EF		H	то			9B	
1		F	0	1	1	1,000	T	S	0	1	s	0	2		0	4		_	EF		_	то	-	_	9B	
2	_	F	Ō.	1	2	1,000	<u> </u>	s	Q	1	ş	Q	2	T	Ō		Α <u>B</u>					ŢQ		_	9B	
2		F	0	1	9	1,000	T	s	0	1	S	0	2	T	0		AB				٦	то	1A	X9	9B	
2		F	0	2	0	1,000	<u>T</u>	S	0	1	S	0	2	T	0	4	_	EF	_	J		_				
2		F	0	2	1	1,000	T -	S	0	1	S	0	2	Ŧ	0	4			GH					⊢		
2		F	0	2	2	1,000	T	S	0	1	S	0	2	T	0	4			GH					╀╌		
2		F	0	2	3	1,000	T	S	0	1	s s	0	2	<u> </u>	0	4			GH		\vdash			ν ₀	OP.	
2		F	0	2	5	250 15,000	T T	S	0	1	S	0	2	T	0	4			GH GH		-	╁	_		9B 9B	
2		F	0	2	6	1,000	T	S	0	1	S	0	2	╁	0	4	_		GH	1			<u> </u>	l\s	30	
2	_	F	0	2	7	1,000	 	s	0	1	s	0	2	+	0	4	-	-	GH	-				\vdash		
3		F	0	. 2	8	1,000	T	s	0	1	S	0	2	Ť	0	4	-	\vdash	GH	-				\vdash		
3		F	0.0	3	2	250	 	s	0	1	s	0	2	Ť	0	4			GH	_			Ė	χg	9B	
3	-	F	0	3	4	250	 '	s	0	1	s	0	2	Ť	0	4	_		FG					+	9B	
تر		F	0	3	5	250	 	s	0	1	s	0	2	Ť	0	4	_	_	FG	_		T		-	9B	·
		F	0	3	7	250	T	s	0	1	s	0	2	Ť	0	4	_	_	FG		_				9B	-
3	ŗ	F	0	3	8	250	T	s	 	1	s	0	2	Ť	0	4	_	-	FG	_	_	f		+	9B	
3	_ 5	יור_	U	_ 3	٥	200		10	Lٿ	Ц.	டு	Ц.		Ц.	╙	4	MΒ	∪E	гΟ	ΠĴ	Ļ_	<u> </u>		ΛA	30	

EP#	\ ID) Nu	mbe	r (Ente	er fro	m page 1)								Sec	ond	ary	ID I	Num	ber	(Er	nter	fron	n pa	age	1)
	L	D	Õ	Ō	Ö	6 0 8	4 7 1																		
Y	P	escri	iptic	n of H	azaro	ious Wastes	(Continue	d; u	se a	addi	ition	al s	hee	ts a	s ne	ces	sar	Y)							
				A. EP	Ą	B. Estimated	C. Unit of									D. P	ROC	ESS	ES						
l			н	AZARDO	ous	Annual	Measure					_				_									
Lir	ne		٧	VASTE I	NO.	Quantity	(Enter	(·	I) PR	OCE	ss c	ODI	ES (E	nter	code)	(2) PR(RIPT enter		n D(1	(If a))
Num	ber		(_	Inter Co	de)	of Waste	co <u>d</u> e)																		
	1	F	0	3	9	15,000	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ		то	1A	Х9	9B
	2	Κ	0	0	1	1,000	Т	S	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B
Ш	3	Κ	0	0	2	1,000	Т	s	0	1	S	0	2	T	0	4	ΑB	CE	FĢ	HJ		то	1A	Х9	9B
Ш	4	Κ	0	0	3	1,000	Т	S	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ		ΤO	1A	X9	9 <u>B</u>
	_5	K	0	Ō	4	1,000	T	S	0	1	S	0	2	Т	0	4	ΑB	ĊE	FG	HJ		то	1A	Х9	9B
	6	Κ	0	0	5	1,000	T	S	0	1	S	0	2	Τ	0	4	ΑВ	CE	FG	HJ		TO	1A	Х9	9B
	7	Κ	0	0	6	1,000	Т	S	0	1	S	0	2	Т	0	4	AB	CE	FG	HJ		то	1A	Х9	9B
	8	Κ	Q	0 ,	7	1,000	Т	S	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ		то	1A	Х9	9B
	9	Κ	0	0	8	1,000	T	s	0	1	S	0	2	T	0	4	ΑB	CE	FG	HJ		ΤO	1A	X9	9 <u>B</u>
1	0	K	0	0	9	2,500	T	Ş	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B
1	1	Κ	0	1	0	2,500	Т	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	ΗJ				Х9	9B
	2	Κ	0	1	1	2,500	Т	S	0	1	S	0	2	T	0	4	ΑВ	CE	FG	HJ				Х9	9B
_1	3	K	0	1	3	100	T	s	0	1	s	0	2	Т	0	4	ΑB	CE	FG	ΗJ				Х9	9B
1	4	K	0	1	4	100	T	S	0	1	s	0	2	Τ	0	4	ΑB	CE	FG	HJ				Х9	9B
_1	5	K	Ő	1	5	250	Т	s	0	1	s	0	2	Ţ	0	4	ΑB	ÇĘ	FG	ΗJ				Х9	9B
1	6	Κ	0	1	6	250	Т	s	0	1	S	0	2	T	0	4	ΑB	CE	FG	HJ				Х9	9B
1	7	Ķ	0	1	7	250	Т	s	0	1	S	0,	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B
1	8	Κ	0	1	8	250	Т	S	0	1	s	0	2	T	0	4	ΑB	CE	FG	HJ				Х9	9B
1	9	K	0	1	9	250	Τ	S	0	1	s	0	2	T	0	4	ΑB	CE	FG	HJ				Х9	9B
2	0	Κ	0	2	0	250	Т	s	0	1	s	0	2	T	0	4	AB	CE	FG	ΗJ				X9	9 <u>B</u>
2	1	Κ	0	2	1	250	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ	L			Х9	9 <u>B</u>
2	2	Κ	0	2	2	250	Т	s	0	1	S	0	2	T	0	4	ΑB	CE	FG	HJ	_			Х9	9B
2		κ	0	2	3	2,500	Т	s	0	1	S	0	2.	T	0	4			FG	_	₩			1	9B
2		κ	0	2	4	2,500	Т	s	0	1	s	0	2	Т	0	4	_		FG	_	_			-	9B
2		κ	0	2	5	250	Т	S	0	1	s	0	2	Ţ	0	4	_		FG		←			Х9	
2		κ	0	2	6	250	Т	s	0	1	s	0	2	T	0	4			FG		_	ļ		-	9B
2		Κ	0	2	7	250	Т	S	0	1	s	Q	2	Т	Ō	4			FG	-					9 <u>B</u>
2		K	0	2	8	250	Т	S	0	1	s	0	2	Τ	0	4	_		FG		1			Х9	
2		κ	0	2	9	100	Т	S	0	1	s	0	2	Т	0	4			FG		•			1	9 <u>B</u>
3		Κ	0	3	0	100	Т	S	0	1	s	0	2	Τ	0	4			FĢ		-			•	9B
3		Κ	0	3	1	100	Т	S	0	1	s	0	2	Т	0	4	_		FG		•				9B
3	_	Κ	0	3.	2	100	Т	s	0	1	s	0	2	T	0	4	_	_	FĢ		_			-	9B
	3	κ	0	3	3	100	Т	S	0	1	s	0	2	T	0	4	_		FG	-	+			_	9B
)	ĸ	0	3	4	100	Т	S	0	1	s	0	2	T	0	4	_		FG	_	-	ļ.,		Х9	9B
3	5	κ	0	3	5	100	Τ	S	0	1	s	0	9	s	0	4	ΑВ	CE	FG	HJ				X9	9 <u>B</u>

EP/	A ID	Nu	mbe	r <i>(Ente</i>	er froi	m page 1)								Sec	ond	агу	ID N	lum	ber	(En	ter	fron	n pa	age	<u>1)</u>	
-	L	D	0	0	0	6 0 8	4 7 1																			
7)	scr	ptio	n of H	azard	ous Wastes	(Continue	d; u	se a	addi	ition	al s	hee	ts a	s ne	ces	sarj	<i>Y)</i>								
			•	A. EPA	A	B. Estimated	C. Unit of									D. P	ROC	ESSI	ES							
			H	AZARDO	ous	Annual	Measure										_									
Li	ne		٧	VASTE I	NO.	Quantity	(Enter	ď	I) PR	OCE	ss c	ODE	S (E	nter	code)	(2) PR(SS D. de is				n D(1))	(If a
Nun	nber		(E	nter Co	de)	of Waste	code)																		·,	
	1	K	0	3	6	2,500	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	Τ				Х9	9B	
	2	K	0	3	7	100	Т	S	0	1	S	Ò	2	T	0	4	ΑB	CE	FG	Н				Х9	9B	
	3	K	0	3	8	100	Т	s	0	1	S	0	2	Τ	0	4	ΑВ	CE	FĢ	HJ				Х9	9B	
	4	K	0	3	9	100	T	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
	5	K	0	4	0	100	Т	s	0	1	S	0	2	Т	Ō	4	ΑB	ÇΕ	FG	HJ				Х9	9 <u>B</u>	· .
	6	Κ	0	4	1	100	Т	S	0	1	S	0	2	Τ	0	4	AB	CE	FG	HJ				Х9	9B	
	7	Κ	0	4	2	2,500	Т	S	0	1	S	0	2	⊣	0	4	ΑВ	CE	FG	HJ				Х9	9B	
	8	K	0	4	3	2,500	Т	S	0	1	S	0	2	Т	0	4	ΑB	ÇΕ	FĢ	HJ				Х9	9B	···-
	9	κ	0	4	4	2,500	Т	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
1	0	Κ	0	4	5	2,500	Т	Ş	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9 <u>B</u>	
1	1	K	0	4	6	2,500	Т	s	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ		то	1A	Х9	9B	
1	2	Κ.	0	4	7	2,500	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	÷
1	3	Κ	0	4	8	2,500	Т	s	0	1	S	0	2	Т	0	4	ΑВ	ÇE	FG	HJ		то	1A	Х9	9B	
1	4	κ	0	4	9	2,500	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ			L	Х9	9B	
1	5	K	0	5	0	2,500	Τ	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	,
1	6	K	0	5	1	2,500	Т	s	0	1	s	0	2	T	0	4	ΑB	CE	FG	HJ				Х9	9B	
1	7	Ķ	0	5	2	2,500	Т	S	0	1	S	0	2	Т	0	4	AΒ	CE	FG	·HJ		то	1A	Х9	9B	
1	8	K	0	6	0	250	Τ	S	0	1	S	0	2	Т	0	4	AB	CE	FG	HJ		-		Х9	9B	
1	9	Κ	0	6	1	250	Т	s	0	1	S	0	2	Т	0	4		CE		-		-	_	Х9	9B	
2	0	Κ	0	6	2	250	Т	s	0	1	S	0	2	Τ	0	4			-	GH	J	то	1A	1	9B	
2		K.	0	6	4	250	Т	S	0	1	S	0	2	Ť	0	4		CE		-			<u> </u>		9B	
2	-	Κ	0	6	5	250	Т	S	0	1	S	0	2	Т	0	4	_	CE				ļ	_	-	9B	
2		Κ	0	6	6	250		S	0	1	S	0	2	T	0	4		CE	_	_		<u> </u>	_	<u> </u>	9B	
2	_	K	0	6	9	250	T	S	0	1	S	0	2	<u> </u>	0	4		CE		\vdash		ТО	1A	X9		
2	-	K	0	7	1	250	<u> </u>	Ş	0	1	S	Õ	2	_	0	4		CE					_	÷	9B	
2	⊢	K	0	7	3	100	T	S	0	1	S	0	2	T	0	4		CE			<u> </u>	<u> </u>	-	┿	9B	
2	7		0	8	3	250	T	S	0	1	S	0	2	<u>T</u>	0	4	-	CE		-	_	\vdash	_	† 	9B	-
2	-	K	0	8	4	250	T	S	0	1	S	0	2		0	4	_	CE		_	<u> </u>	 		_	9B	
2	-	K	0	8	5	250	T	S	0	1	S	0	2	Ţ	0	4	-	CE	Ť	\vdash	\vdash		4 .	+	9B	
3	_	K	0	8	6	250	T	S	0	1	S	0	2	╚	0	4	_	CE				-	-	-	9B	
3	_	K	0	8	7	250	<u>T</u>	S	0	1	S	0	2	<u> </u>	0		AB AB	-		_	\vdash	110	1A	† 	9B	<u> </u>
3	\vdash	K	0	8	8	250	T	S	0	1	S	0	2	╠	0	4	-		-	HJ			-	┿	9B	
	$\frac{3}{1}$	K	0	9	0	250	T	s	0	1	S	0	2	<u> </u>	0		AB		_	-			_	-	9B	
	7	K	0	9	1	250	T	S	0	1	S	0	2	Η-	0	4	_			HJ		<u> </u>	_	i	9B	
3	5	K	0	9	3	250	T	S	0	1	S	0	2	Т	0	4	ΑB	CE	ΙFG	HJ	L	<u> </u>	<u> </u>	Χŷ	9B	

EPA ID Number (Enter from page 1) Secondary ID Number (Enter from page 1) D 4 7 1 0 0 8 escription of Hazardous Wastes (Continued; use additional sheets as necessary) A. EPA B. Estimated C. Unit of D. PROCESSES **HAZARDOUS** Annual Measure (2) PROCESS DESCRIPTION (If a (1) PROCESS CODES (Enter code) WASTE NO. Quantity (Enter Line code is not entered in D(1)) Number (Enter Code) of Waste code) lκ S 0 S 0 2 0 ABICEIFG. 1 9 4 250 Т 1 Т 4 HJ X9 9B 2 K Т S 0 S 2 AB 0 9 5 250 1 0 Т 0 4 CEIFG HJ X9 9B 3 K Т S 0 1 S 0 2 Т 0 9 6 250 0 4 AB CEIFG HJ X9 9B 4 K 0 9 7 250 Т S 0 1 S 0 2 Т 0 4 AB CEIFG HJ X9 9B 5 K Т S 2 0 9 8 100 0 1 S 0 Т 0 4 ABICEIFG HJ X9 9B 6 K 0 9 9 100 Т S 0 1 S 0 2 Т 0 4 AB ICEIFG HJ X9 9B 7 K 0 Т S 0 2 0 1 0 250 1 S 0 Т 4 AB ICEIFG HJ TO 1A X9 9B 8 K Т S S 2 1 0 1 250 0 1 0 Т 0 ABICEIFG HJ X9 9B 4 Т 2 9 Κ 1 2 250 S 0 1 S 0 Т 0 AB CEIFG X9 9B 0 4 HJ K 0 3 250 Т S 0 S 0 2 T 0 AB CEIFG 0 1 1 4 HJ X9 9B T S 0 S 0 2 1 1 K 1 0 4 250 1 Т 0 4 AB CEIFG HJ X9 9B Т S 0 2 2 5 S 0 0 CEIFG 1 K 1 0 100 1 Т 4 AB HJ X9 9B 1 3 lκ Т S 0 S 0 2 Т 0 1 0 6 250 1 4 ABICEIFG HJ X9 9B 4 K 1 0 7 15,000 Т S n 1 S 0 2 Т O 4 AB ICEIFG HJ X9 9B 1 Κ S 2 1 5 1 0 8 15,000 Т 0 1 S 0 T 0 4 AB! CEIFG HJ X9 9B Т S 0 1 S 0 2 Т 0 CELFG X9 9B 1 6 K 1 9 AB HJ 0 15,000 4 1 7 Κ 1 0 15.000 T S 0 1 S 0 2 T 0 4 ABICEIFG HJ X9 9B 1 Т S S 0 2 Т 0 1 8 lκ 1 250 0 1 4 ABICEIFG HJ X9 9B 1 1 Т 0 2 0 1 9 lΚ 1 1 2 250 S 1 S 0 T 4 ABICEIFG HJ X9 9B 2 0 3 Т S 0 S 0 2 0 ABICEIFG K 1 1 250 1 Т 4 HJ X9 9B S 2 2 1lK 1 4 250 T 0 S 0 Т 0 4 ABICEIFG HJ X9 9B 1 1 Т S 2 2 lκ 1 1 5 250 0 1 S 0 2 Т 0 4 ABICEIFG HJ X9 9B 3 T S S 2 2 K 1 1 6 0 1 0 T 0 4 ABI CEIFG HJ X9 9B 250 Т S S 2 X9 9B 0 1 0 Т 0 ABICEIFG HJ 2 4 K 1 1 7 250 4 2 5 K 1 1 8 250 Т S 0 1 S 0 2 Т 0 4 ABICEIFG HJ X9 9B Т S 0 S 0 2 T 0 4 AB CEIFG X9 9B 2 6 Κ 1 2 3 250 1 HJ Т S 2 0 AB CEIFG 2 7 0 S 0 Т 4 HJ X9 9B Κ 1 2 4 250 1 2 2 Ť S 0 S 0 Т 0 ABI CEIFG HJ X9 9B 2 8 Κ 1 5 250 1 4 2 9 K 1 2 6 250 T S 0 1 S 0 2 T 0 4 ABl CEIFG HJ X9 9B Κ Ţ S 0 1 S 0 2 Т 0 4 AB CEIFG HJ X9 9B 3 0 1 3 1 15,000 1 3 2 T S 0 S 0 2 Т 0 AB CEIFG HJ X9 9B Κ 1 4 15,000 S S 2 Т 3 2 6 250 T 0 1 0 0 4 AB CEIFG HJ **X9** 9B Κ 1 3 Κ T S 0 S 0 2 T 0 4 CEFG HJ 1 4 0 15,000 1 AΒ X9 9B S S 0 2 T 0 T 0 CE HJ 9B 1 4 1 250 1 4 AB **IFG X9** 5 Т S S 2 3 K 1 4 2 250 0 1 0 T 0 4 AB CE lFG HJ X9 9B

EP#	\ ID	Nu	mbe	r (Ente	er froi	m page 1)								Sec	ond	lary	ID I	lum	ber	(En	ter	fro	m pa	ige 1	1)	
Ļ	Ļ	D	Ō	0 .	0	6 0 8	4 7 1																			
Y		scri	ptio	n of H	azard	ous Wastes	(Continue	d; u	se a	addi	tion	al s	hee	ts a	s ne	ces	sarj	y)				•				
1				A. EPA	A	B. Estimated	C. Unit of									D. P	ROC	ESSI	ES							
			н	AZARDO	ous	Annual	Measure																		-	
Lii	ne	İ	٧	VASTE I	NO.	Quantity	(Enter	(1) PR	OCE	ss c	ODE	ES (E	nter	code)	(2) PR					TION ered in	n D(1)))	(If a
Num	ber		(E	nter Co	de)	of Waste	code)																	,	•	
	1	K	1	4	3	250	Т	S	0	1	S	0	2	Т	0	4	ΑВ	ÇĒ	FG	HJ				Х9	9 <u>B</u>	
	2	K	1	4	4	250	Т	s	0	1	s	0	2	T	0	4	ΑВ	CE	FG	HJ				Х9	9B	
	3	K	1	4	5	250	T	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	ΗJ				Х9	9B	
	4	K	1	4	7	250	Т	s	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
	5	Κ	1	4	8	250	Т	S	0	1	S	0	2	T	0	4	ΑB	CE	FG	ΗJ				Х9	9B	
	6	K	1	4	9	250	T	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
	7	Κ	1	5	0	250	T	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
	8	K	1	5	1	250	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
	_9	K	1	5	6	250	Т	ß	0	1	s	0	2	Т	0	4	ΑB	CE	FG	ΗJ				Х9	9B	
1	0	K	1	5	7	250	Т	ß	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
1	1	Ķ	1	5	8	250	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	ΗJ				Х9	9 <u>B</u>	
1	2	K	1	5	9	250	Т	Ø	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
1	3	K	1	6	0	250	Т	ß	0	1	S	0	2	Т	0	4	ΑB	CE	FG	ΗJ				Х9	9B	
1	4	Κ	1	6	1	250	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
1	5	Ķ	1	6	9	15,000	Т	S	0	1	S	0	2	Т	0	4	Α <u>B</u>	ĊĒ	FG	ΗJ				Χ9	9B	
1	6	K	1	7	0	15,000	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
_1	7	K	1	7	1	15,000	Ţ	S	0	1	Ş	0	2	Τ	Q	4	ΑB	CE	FG	ΗJ				X9	9 <u>B</u>	
_1	8	Κ	1	7	2	15,000	Т	s	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ		L	$oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{oldsymbol{ol}}}}}}}}}}}}}}}}}}$	Х9	9B	
1	9	κ	1	7	4	15,000	Τ	Ş	0	1	S	0	2	Т	Q	4	Α <u>Β</u>	ЕF	GH	J		L		X9	9B	
_2	0	K	1	7	5	15,000	Τ	s	0	1	s	0	2	Т	0	4	AB	CE	FG	ΗJ				Х9	9B	
2	1	Κ	1	7	6	15,000	Т	S	0	1	Ş	0	2	Т	0	4	ΑB	CE	FG	HJ				X9	9B	
2	2	Κ	1	7	7	15,000	Т	s	0	1	s	0	2	Τ	0	4	ΑB	CE	FG	HJ		<u> </u>		Х9	9B	
2	3	κ	1	7	8	15,000	Т	s	0	1	s	0	2	Т	0	4	ΑB	CE	FG	ΗJ			<u> </u>	X9	9B	
2		Р	Ò	Õ	1	100	Т	S	0	1	s	0	2	Т	0	4		-	FG	_		_	┷		9B	
2		Р	0	0	2	100	Т	s	0	1	s	0	2	Т	0	4			FG		_	L	igspace	-	9B	
2		P.	0	0	3	100	Т	S	0	1	s	0	2	Т	0	4			FG			<u> </u>	igspace		9B	
2		Р	0	0	4	100	Т	s	Q	1	s	Õ	<u>2</u>	T	0	4			FĢ			<u> </u>	igspace	_	9B	
2	_	Р	0	0	5	100	Т	s	0	1	S	0	2	Т	0	4	_	_	FG				—	•	9B	
2		Р	0	0	6	250	Т	s	0	1	S	0	2	Т	0	4	•		FG		-	1	igspace	-	9B	
3	_	Р	0	Ō	7	100	Т	S	0	1	s	0	2	Т	0	4	_	_	FG			<u> </u>	 	_	9B	
3	-	Р	0	0	8	250	Т	s	0	1	S	0	2	Т	0	4	_	_	FG		_		╄	-	9B	
3		Р	0	0	9	250	Т	S	0	1	s	0	2	Τ	0	4			FG		_		╀-	-	9B	
	3	Р	0.	1	Ò	250	Т	s	0	1	s	0	2	Τ	0	4	ΑB	CE	FG	HJ	L		 	Х9	9B	
		Р	0	1	1	250	Т	s	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ	_		\bot	Х9	9B	
3	5	Р	0	1	2	250	Т	s	0	1	S	0	2	Т	0	4	ΑB	ÇĘ	FG	HJ				X9	9B	ا ئىيىن

EP/	A ID	Nu	mbe	r <i>(Ent</i> e	er fro	m page 1)								Sec	ond	lary	ID N	lum	ber	(Er	iter	fró	m pa	ge '	1)	
_	L	D	0	0	0	6 0 8	4 7 1																			
Y	À	escr	iptic	n of H	azaro	lous Wastes	s (Continue	ed; u	ise a	addi	ition	al s	hee	ts a	s ne	ces	sary	1)								
4				A. EP	Ą	B. Estimated	C. Unit of									D. P	ROCI	ESSI	ES							
			Н	AZARD	ous	Annual	Measure																			
Lii	ne		٧	VASTE I	NO.	Quantity	(Enter	(1) PR	OCE	ss c	ODE	ES (E	nter	code	;)	(2)) PRO					TION ered in	n D(1)	,	(If a
Nun	ber		(E	Enter Co	de)	of Waste	code)																			
	1	Р	0	1	3	250	Т	S	0	1	S	0	2	Τ	0	4	ΑВ	CE	FG	HJ				Х9	9B	
	2	Р	Q	1	4	250	T .	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9	9B	
	3	Р	0	1	5	250	Т	S	0	1	s	0	2	Т	0	4	ΑВ	ÇΕ	FĢ	HJ				X9	9B	
	4	Р	0	1	6	250	Т	S	0	1	S	0	2	T	0	4	ΑВ	CE	FG	ΗJ				X9	9B	
_	5	Р	0	1	7	250	Т	s	0	1	S	0	2	T	0	1	ΑВ	CE	FG	HJ				X9	9B	
	6	Р	0	1	8	250	Т	S	0	1	s	0	2	Т	0	1	ΑВ	CE	FG	ΗJ				X9	9B	
	7	P.	0	2	0	250	T	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9	9B	
	8	Р	0	2	1	250	Т	S	0	1	S	0	2	Т	0	4	ΑВ	ÇΕ	FG	HJ				X 9	9B	
	9	Р	0	2	2	250	Т	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
_1	0	Р	0	2	3	250	Τ	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	ΗJ				Х9	9B	
1	1	Р	0	2	4	250	Т	s	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9	9B	
1	2	Ρ	0	2	6	250	Т	s	0	1	S	0	2	T	0	4	ΑВ	CE	FG	IJ				Х9	9B	
1	3	Р	0	2	7	250	Т	S	0	1	s	0	2	Т	0	4	ΑВ	ÇE	FG	HJ		•		Х9	9B	
1	4	Ρ	0	2	8	250	Т	s	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9	9B	
1	5	Р	0	2	9	100	T	s	0	1	S	0	2	۲	0	4	ΑВ	СĒ	FG	HJ		-		X9	9B	
1	6	Р	0	3	0	100	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
1	7	Р	0	3	1	100	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CĘ	FG	HJ		-		X 9	9B	
1	8	Р	0	3	3	100	Т	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				X 9	9B	
_1	9	Р	0	3	4	250	Т	s	0	1	s	0	2	Т	0	4	ΑB	ÇE	FĢ	HJ				X9	9B	
2	0	Р	0	3	6	100	Т	S	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ			Ì	Х9	9B	
2	1	Р	0	3	7	100	Т	s	0	1	s	0	2	T	0	4	ΑВ	CE	FG	ΗĴ				X9	9B	-
2	2	Р	0	3	8	100	Т	S	0	1	s	0	2	Т	0	4	АВ	CE	FG	HJ				Х9	9B	
2	3	Р	Q	3	9	250	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	ΗJ				Х9	9B	
2	4	Ρ	0	4	0	250	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
2	5	P.	0	4	1	250	Т	S	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	ΗJ				X9	9B	
2	6	Р	0	4	2	250	Т	S	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ			igspace	Х9	9B	
2		Р	0	4	3	100	Т	s	0	1	s	0	2	T	0	4	ΑВ	CE	FG	HJ			igspace	Х9	9B	
2		Р	0	4	4	250	Т	s	0	1	s	0	2	۲	0	4	АВ	CE	FG	HJ			igspace	Х9	9B	
2	_	Р	Ò	4	5	250	Т	s	0	1	s	0	2	Τ	0	4	АВ	CE	FG	HJ			igspace	Х9	9B	
3	0	Р	0	4	6	250	T	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9	9B	
3		Р	0	4	7	250	Ţ	Ş	Ō	1	S	0	2	Т	Q	4	ΑB	ÇĒ	FG	HJ	Ĺ			Х9	9 <u>B</u>	
3	2	Р	0	4	8	250	Т	S	0	1	s	0	2	Т	0	4	АВ	CE	FG	ΗJ				Х9	9B	
	3	Р	0	4	9	100	Т	s	0	1	s	0	2	Т	0	4	АВ	CE	FG	HJ				Х9	9B	
	1	Р	0	5	0	100	Т	s	0	1	s	Õ	2	Т	0	4	ΑВ	ĊĒ	FG	ΗJ				Х9	9B	
3	5	Р	0	5	1	100	Т	s	0	1	s	0	2	Т	0	4	АВ	ÇE	FG	HJ				Х9	9B	

EP#	A II	- Nu	mbe	er <i>(Ent</i> e	er fro	m page 1)								Sec	ond	ary	ID I	lum	ıber	(EI	nter	fre	от р	age	1)	
	L	D	0	0	0	6 0 8	4 7 1				-												7	T		
Y		escr	iptic	n of H	azaro	ous Wastes	(Continue	d; u	ise a	add	ition	al s	hee	ts a	s ne	ces	sar	<i>(</i>)	_			_				
				A. EP	Ą	B. Estimated	C. Unit of						-			D. P	ROC	ESSI	ES							
		l	н	AZARDO	ous	Annual	Measure												*							
Lin	ne			VASTE	•	Quantity	(Enter	(1) PR	OCE	ess c	ODI	ES (E	nter	code)	(2) PR					PTION		,,,	(If a
Num		r		Enter Co		of Waste	code)												COC	Je 15	not	eni	tered i	ווו ט(וו	"	
		Р	0	5	4	100	Т	s	0	1	s	0	2	т	0	4	AB	CE	FG	HJ		T	T	Х9	9B	
П	2	Р	0	5	6	250	T	s	0	1	s	0	2	T	0	4	_	CE		_	-	t	+	X9		
	3	Р	0	5	7	100	Т	s	0	1	s	0	2	T	0	4		CE			T	T	十	Х9	9B	
H	4	Р	0	5	8	100	Т	s	0	1	s	0	2	T	0	4	H	CE	_		T	T	+	X9	-	_
	5	Р	0	5	9	100	Т	s	0	1	s	0	2	Т	0	4	Н	CE		HJ	┢	T	+		9B	
	-6	Р	0	6	0	250	Т	s	0	1	s	0	2	T	0	4	-	CE			Г	T	1		9B	· ·
厂	7	P	0	6	2	250	Т	s	0	1	s	0	2	Т	0	4	\vdash	CE	_	_	T	T	\top	Х9		
	. 6	Р	0	6	3	250	Т	s	0	1	S	0	2	Т	0	4	Н	CE		_	Г	T	→	Х9		-
П	9	Р	0	6	4	250	Т	s	0	1	s	0	2	Т	0	4	-	CE				T	╅	Х9	9B	
1	- (Р	0	6	5	250	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CÈ	FG	HJ			 	Х9	9B	
1	1	Р	0	6	6	250	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ			\top	Х9	9B	
1	2	Р	0	6	7	100	Т	S	O	1	s	Ó	2	Ţ	0	4	ΑВ	CE	FG	ΗJ	T		\top	Х9	9B	
1	3	Р	0	6	8	· 100	Т	S	0	1	s	0	2	• T	0	4	ΑВ	CE	FG	HJ			\top	Х9	9B	
1	4	Р	Ö	6	9	100	Т	S	O.	1	S	Ō	2,	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
1	5	Р	0	7	0	100	Т	s	0	1	s	0	2	Т	0	4	ΑŖ	CE	FG	ΗJ				Х9	9B	
1	6	Р	0	7	1	100	T	S	Ō	1	S	0	2	T	Ō	4	ΑВ	CE	FG	HJ				Х9	9B	
1	7	P	0	7	2	250	T	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9	9B	
1	8	Р	Ō	7	3	100	Ţ	S	0	1	S	0	2	Ţ	0	4	ΑB	CE	FG	HJ				Х9	9B	
1	ξ	Р	0	7	4	100	Т	S	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	ΗJ				Х9	9B	
2	_	P	0	7	5	100	T	S	0	1	S	0	2	Τ	0	4	ΑB	CE	FG	HJ				Х9	9B	
2	1	Р	0	7	6	250	Т	S	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
2	2	P	0	7	7	250	Т	S	0	1	S	0	2	T	0	4	ΑВ	CE	FĞ	ΗJ				Х9	9B	
2	3	Р	0	7	8	250	Т	S	0	1	S	0	2	T	0	4	ΑВ	CE	FG	HJ				Х9	9B	
2	4	Р	0	<u>,</u> 8	1	250	Т	s	0	1,	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
2	_	Р	0	8	2	100	Т	S	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ			_	Х9	9B	
2		P	0	8	4	100	Т	s	0	1	s	0	2	Т	0	4		CE	-	-	•	_	_	+	9B	
2		P	0	8	5	250	Т	S	0	1	s	0	2	Т	0	4	ΑВ		_		1		igspace	_	9B	
2		Р	0	8.	7	250	T .	S	0	1	s	0	2	Т	0	4	ΑВ			_	1	_	Д	+	9B	
2		P	0	8	8	250	Т	S	0	1	s	0	2	Т	0	4	_	CE	_	÷	•		 	+	9B	
3		P .	0	8	9	250	Т	S	0	1	s	0	2	T	0	4	ΑB	_ :		-		L			9B	
3		Р	Ó	9	2	250	Τ	S	0	1	s	0	2	Т	0	4		CE			_	<u> </u>	4		9 <u>B</u>	<u>.</u>
3	_	2 P	0	9	3	250	Т	S	0	1	S	0	2	Т	0	4	AB	_			1		\bot	+	9B	
		P	0	9	4	100	Т	S	0	1	s	0	2	Т	0	4		CE	_	_	1	_	_	+	9B	
	7	P	Ö	9	5	250	Т	S	0	_1	s	0	2	Т	0	4		ÇΕ	_		f	L	<u>.</u>	+	9 <u>B</u>	
3	5	Р	0	9	6	250	Т	S	0	1	S	0	2	Τ	0	4	ΑВ	CE	FG	HJ	<u> </u>		Щ	Х9	9B	

EP/	A ID	Nu	mbe	r <i>(Ent</i>	er froi	m page 1)								Sec	ond	lary	ID Num	ber	(En	iter	froi	m pa	ge 1)	
1	L	D.	Ó	0	0	6 0 8	4 7 1																	
Y		escr	iptic	n of H	azard	lous Waste	s (Continue	ed; ι	ıse a	add	ition	al s	hee	ts a	s ne	ces	sary)							
Q.				A. EP	4	B. Estimated	C. Unit of									D. P	ROCESSI	ES						
ļ		1	н	AZARD	ous	Annual	Measure																	
Li:	ne		V	VASTE I	NO.	Quantity	(Enter	(1) PR	OCE	SS C	ODE	ES (E	nter	code	;)	(2) PR(ΓΙΟΝ red in	D(1))	(If ą
Nun	nber		(I	Enter Co	de)	of Waste	code)																- (- //	
	1	Р	0	9	7	250	Т	S	0	1	S	0	2	Τ	Ō	4	AB CE	FG	HJ				X9 9	В
	2	Р	0	9	8	100	Т	s	0	1	S	0	2	Т	0	4	АВ СЕ	FG	HJ				X9 9	В
	3	Ρ	0	9	9	100	Т	S	0	1	S	0	2	Т	0	4	АВ СЕ	FG	HJ				X9 9	B
	4	Р	1	0	1	250	Т	S	0	1	S	0	2	Т	0	4	AB ÇE	FG	HJ				X9 9	В
	6	Р	1	0	2	150	Т	s	0	1	S	0	2	Т	0	4	AB CE	FG	HJ				X 9 9	В
	7	Р	1	0	3	100	Т	S	0	1	S	0	2	Ţ	0	4	AB CE	FG	HJ				X9 9	B
	8	Р	1	0	4	100	Τ	S	0	1	s	0	2	Т	0	4	АВ СЕ	FG	HJ				X9 9	В
	9	Р	1	0	5	100	Т	S	0	1	s	0	2	Τ	0	4	АВ СЕ	FG	HJ				X9 9	B
1	0	Р	1	0	6	100	Т	S	0	1	s	0	2	Τ	0	4	АВ СЕ	FG	HJ				X9 9	В
_1	1	Р	1	0	8	100	Т	s	0	1	S	0	2	Т	0	4	AB CE	FG	HJ				X9 9	BB
1	2	P.	1	0	9	100	Т	S	0	1	s	Ö	2	T	0	4	AB CE	FG	HJ	,			X9 9	B
_1	3	Р	1	1	0	250	Т	s	0	1	s	0	2	Т	0	4	AB CE	FG	HJ				X9 9	B
1	4	P	1	1	1	250	Т	s	0	1	s	Õ	2	Т	.0	4	AB CE	FG	HJ				X9 9	В
1	5	Р	1	1	2	250	Т	s	0	1	s	0	2	Т	0	4	AB CE	FG	HJ				X9 9	В
1	6	Р	1	1	3	250	T	s	0	1	S	Q	2	Т	0	4	AB CE	FG	HJ				X9 9	В
1	7	Р	1	1	4	250	Т	s	0	1	s	0	2	Т	0	4	AB CE	FG	HJ				X9 9	В
1	8	Р	1	1	5	250	Т	ş	0	1	s	Ō	2	Т	0	4	AB CE	FG	HJ				X <u>9</u> 9	B
1	9	Р	1	1	6	250	Т	s	0	1	S	0	2	Т	0	4	AB CE	FG	HJ				X9 9	B
2	_	Р	1	1	8	250	Ţ	s	0	1	Ş	0	2	Ţ	Q	4	AB CE	FĢ	ΉĴ				X9 9	В
2	_ 1	Р	1	1	9	100	Т	s	0	1	S	0	2	Т	0	4	AB CE	FG	HJ				X9 9	B
2	2	Р	1	2	0	250	Ţ	s	0	1	S	0	2,	Т	0	4	AB CE	FG	ΗJ		ļ		X9 9	<u>B</u>
2	Ť	Р	1	2	1	250	Т	s	0	1	s	0	2	T	0	4	AB CE			<u> </u>	_	-	X9 9	
2	\vdash	Р	1	2	2	250	Т	S	0	1	s	0	2	Τ	Ö	4	AB CE	_		_	ļ	_	X9 9	
2		Р	1	2	3	250	Т	S	0	1	S	0	2	Т	0	4	AB CE			-	<u> </u>	+ +	X9 9	
2	-	Ρ	1	2	7	250	Т	S	0	1	S	0	2	T	0	4	AB CE			_	<u> </u>	-	X9 9	
2	_	Р	1	2	8	250	T	S	0	1	S	0	2	T	0	4	AB CE	_	\vdash	_		+ +	X9 9	.
2	_	Р	1	8	5	250	<u>T</u>	S	0	1	S	0	2	Τ_	0	4	AB CE			_	-	+-	X9 9	
2	Ť	Р	1	8	8	250	T	S	0	1	S	0	2	Ξ.	0	4			_		\vdash		X9 9	
3	 	P	1	8	9	250	Т	S	0	1	S	0	2		0	4	AB CE				_	-	X9 9	
3	-	P	1	9	<u>Q</u>	250	<u>T</u>	S	0	1	S	0	2	<u> </u>	0	4	AB CE			<u> </u>		+	X9 9	
3	_	P	1	9	1	250	T	S	0	1	S	0	2	<u> </u>	0	4	AB CE		-		_		X9 9	
3	_	P	1	9	2	250	T	S	0	1	S	0	2		0	4	AB CE					+	X9 9	
		P	1	9	4	250	T	S	0	1	S	0	2	_	0	4	AB CE	-		_		+	X9 9	
	ō	Р	1	9	6	250	Т	S	0	1	S	0	2	Т	0	4	AB CE	FG	ΙΗJ		<u> </u>		X9 9	IB.

EP/	A II	D Nu	mbe	er (Ente	er fro	m page 1)								Sec	ond	агу	ID I	Num	ber	(Er	iter	fro	m pa	ige '	1)	
Ļ,	Ļ	D	0	0	Ō	6 0 8	4 7 1																			
Y		escr	iptic	on of H	azard	lous Waste	s (Continue	ed; u	ise a	add	ition	al s	hee	ts a	s ne	ces	sarj	<u>()</u>								
				A. EP	A	B. Estimated	C. Unit of									D. P	ROC	ESSI	ES			_				
			н	AZARD	ous	Annual	Measure										-									
Liı	ne		١	NASTE !	NO.	Quantity	(Enter	ſ	1) PF	ROCE	SS C	ODE	ES (E	nter	code)	(2) PRI	•				TION red ir	n D(1)		(If a
Num	nbe	ŗ	(!	Enter Co	de)	of Waste	code)							_												_
		1 P	1	9	7	250	Т	S	0	1	S	0	2	۲	0	4	AB	CE	FG	HJ				Х9	9B	
	2	2 P	1	9	8	250	T	s	0	1	s	0.	2	Т	0	4	ΑВ	ÇĘ	FG	ΉJ	·			Х9	9B	
		3 P	1	9	9	250	Т	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
	4	4 P	2	0	1	250	Т	S	Ö	1	Ş	Õ	2	T	0	4	ΑB	CE	FG	HJ				Х9	9B	
		P	2	0	2	250	Т	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
	(S P	2	Ó	3	250	Ţ	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
		7 P	2	0	4	250	Т	S	0	1	S	0	2	T	0	4	ΑB	CE	FG	ΗJ				Х9	9B	
		ΒP	2	0	5	250	Т	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
	(U	0	0	1	250	T	s	0	1	S	0	2	T	Ó	4	ΑB	CE	FG	ΗJ				Х9	9B	
1	(บ	0	0	2	250 ,	Т	s	0	1	S	0	2	T	0	4	ΑB	CE	FG	HJ				Х9	9B	
. 1		1 U	0	0	3	250	Τ.	S	0	1	S	0	2	T	0	4	ΑB	CE	FG	HJ				Х9	9B	
1		2 U	0	0	4	250	Т	S	0	1	S	0	2	T	0	4	ΑВ	CE	FĢ	HJ				Х9	9B	
1		υ	0	0	5	250	Т	S	0	1	S	0	2	T	0	4	AB	CE	FG	HJ				Х9	9B	
1	_ 4	1 U	0	0	6	100	T	S	0	1	S	0	2	T	0	4	ΑB	CE	FG	HJ				Х9	9B	
1		Ū	0	0	7	250	Т	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
1	- (U	0	0	8	250	Т	s	0	1	S	0	2	Ţ	0	4	ΑB	CE	FG	ΗJ				X9	9B	-,
1	-	7 U	0	0	9	250	Т	S	0	1	S	0	2	Ţ	0	4	ΑB	CE	FG	ΗJ				Х9	9B	
1	{	3 U	0	1	0	250	Т	s	0	1	S	0	2	T	0	4	ΑB	ÇĒ	FG	ΗJ				Х9	9B	
1	(U	0	1	1	250	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
2	(υ	0	1	2	250	T	S	0	1	S	Ö	2	T	Ö	4	ΑВ	ÇE	FG	HJ				Х9	9B	
2	•	ı U	0	1	4	250	Т	s	0	1	S	0	2	T	0	4	ΑB	CE	FG	HJ				Х9	9B	
2	2	2 <u>U</u>	0	1	5	250	Т	Ş	Ō	1	s	0	2	Ţ	Q	4	ΑB	ÇĒ	FĢ	ΗJ				Х9	9B	
2	;	3 U	0	1	6	250	Т	s	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
2	_	1 U	0	1	7	100	Т	s	0	1	s	0	2	T	Ō	4	ΑB	CE	FG	ΗJ				Х9	9B	
2	. !	υ	0	1	8	250	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
2	(υ.	0	1	9	250	T	S	0	1	S	0	2	Τ	0	4	ΑВ	CE	FG	HJ				Х9	9 <u>B</u>	
2	-	7 U	0	2	0	100	Т	s	0	1	s	0	2	Т	0	4	_	_	FG				لِـــا	Х9	9B	
2		υ	Ö	2	1	250	Т	s	0	1	s	0	2	Τ	0	4			FG	_	<u> </u>	L		Х9_	9B	
2	9	U	0	2	2	250	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ			igspace	Х9	9B	
3	(υ	0	2	3	250	Т	s	0	1	s	0	2	Τ	0	4	ΑВ	CE	FG	ΗJ	L		$oxed{oxed}$	Х9	9B	
3	÷	1 U	0	2	4	250	Т	s	0	1	s	0	2	<u> </u>	0	4	ΑВ	CE	FG	HJ	L		igsqcut	Х9		
3	- 2	2 U	0	2	5	250	T	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
		3 U	0	2	6	250	Т	s	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
		U	0	2	7	250	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
3	!	5 U	0	2	8	250	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	

EPA ID Number (Enter from page 1) Secondary ID Number (Enter from page 1) 4 7 1 D 0 8 escription of Hazardous Wastes (Continued; use additional sheets as necessary) A. EPA B. Estimated C. Unit of D. PROCESSES **HAZARDOUS** Annual Measure (2) PROCESS DESCRIPTION (If a (1) PROCESS CODES (Enter code) Line WASTE NO. Quantity (Enter code is not entered in D(1)) of Waste Number (Enter Code) code) S 0 0 0 1 0 2 9 250 Т 1 S 2 т 4 AB CEIFG HJ X9 9B 2 Т S 2 0 3 0 250 0 1 S 0 T 0 4 AB CEIFG HJ X9 9B 3 Т S U 0 S 2 0 3 1 250 1 0 Т 0 4 AB CEIFG HJ X9 9B 4 Ū 0 3 2 250 Т S 0 1 S 0 2 T 0 4 ΑB CEFG HJ Χ9 9B 5 Т S 0 3 3 250 0 S 0 2 0 U 1 Т 4 AB ICEIFG HJX9 9B 6 U 0 3 4 250 T S 0 1 S 0 2 Т 0 4 ABI CEIFG HJ X9 9B 7 U 5 Т S 0 S 0 2 0 3 250 1 Т 0 4 ABICEIFG HJ X9 9B 8 U 0 3 6 250 Т S 0 1 S 0 2 T 0 4 ABICEIFG HJ X9 9B 9 U 0 3 7 250 T S 0 1 S 0 2 Т 0 AB CEIFG X9 4 HJ 9B Т S 0 0 3 8 250 0 1 S 0 2 T 0 **CEIFG** 4 ABl HJ X9 9B 1 U 0 3 9 250 Т S 0 1 S 0 2 Т 0 4 ABICEIFG 1 HJ X9 9B 2 250 Т S 0 S 2 1 U 0 4 1 1 0 Т 0 4 ABICEIFG HJ X9 9B 1 3 U 0 4 2 Т S 0 S 0 2 Т 0 ABICEIFG 250 1 4 HJ X9 9B 1 4 Ū 0 4 3 250 Т S 0 1 S 0 2 Т 0 4 ABICEIFG HJ X9 9B 5 Ù Т S 2 0 4 0 1 S 0 Т 0 ABI CEIFG HJ X9 4 250 4 9B Т 2 6 S S 1 U 0 4 5 250 0 1 0 T 0 4 ABI CEIFG HJ X9 9B 7 u Т S 1 0 4 6 0 1 S 0 2 Т 0 4 AB CEIFG X9 250 HJ 9B 8 U 7 250 Т S 0 S 0 2 Т 0 4 AB CEFG 1 0 4 1 HJ X9 9B S 2 0 9 U 0 4 8 250 Т 0 S 0 Т 4 ABICEIFG X9 9B 1 1 HJ 2 S 0 U Т S 2 0 4 9 250 0 1 0 Т 0 4 ABI CEIFG HJ X9 9B Т S 2 1 Ū 0 5 0 250 0 S 0 2 Т 0 4 ABICEIFG 1 HJ **X9** 9B 2 2 U 0 5 1 250 Т S 0 S 0 2 0 ABICEIFG X9 1 Т 4 HJ 9B 3 2 T S 2 T CEIFG 2 U 0 5 250 0 1 S 0 0 4 ABI HJ X9 9B Т S S 2 X9 9B U 3 0 1 0 Т 0 CEFG HJ 4 0 5 250 4 AB 2 5 Ū 0 5 250 Т S 0 1 S 0 2 Т 0 4 ABICEIFG HJ **X9** 9B 5 Т S 0 S 0 2 Т 0 CEIFG 2 6 U 0 5 6 250 1 4 ABI HJ X9 9B S 0 S 0 2 0 AB CEIFG 2 7 U 0 5 7 250 T 1 T 4 HJ X9 9B T S 0 S 0 2 Т 0 CEIFG 8 U 0 5 8 250 1 4 ABl HJ X9 9B 2 9 U T S 0 S 0 2 Т 0 ABl CEIFG HJ X9 9B 0 5 9 100 1 4 T S S 3 0 U 0 6 0 100 0 1 0 2 Т 0 4 AB CEFG HJ X9 9B Т T S 0 S 0 2 0 CEIFG HJ X9 9B 3 U 0 6 1 100 1 AB 1 4 3 2 0 6 2 250 T S 0 1 S 0 2 T 0 4 AB CEIFG HJ **X9** 9B T U 0 6 3 250 S 0 1 S 0 2 T 0 4 AB CEIFG HJ X9 9B S S 0 2 250 T 0 T 0 CEIFG U 0 6 4 1 4 AB HJ X9 9B 5 0 250 Т S 0 S 0 2 Т 0 4 CEIFG HJ X9 9B 3 6 6 1 AB

EP/	A IE	Nu	mbe	r (Ente	er froi	m page 1)								Sec	ond	lary	ID N	lum	ber	(Er	nter	fro	m pa	ıge 1	<u>, </u>	
1	L	D	0	0	0	6 0 8	4 7 1																			
Y		escr	iptio	n of H	azard	ous Wastes	(Continue	d; u	ise a	add	ition	al s	hee	ts a	s ne	ces	sar	()								
1				A. EP	4	B. Estimated	C. Unit of									D. P	ROC	ESSI	ES						-	
			H	AZARD	ous	Annual	Measure																			
Li	ne	1	٧	VASTE	NO.	Quantity	(Enter	(*	1) PR	OCE	SS C	CODE	ES (E	nter	code)	(2) PR(TION ered in	ı D(1)	•	(If a
Nun	nber		(E	Enter Co	de)	of Waste	code)								_										· 	
_	1	U	0	6	7	250	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X 9	9B	
	2	U	0	6	8	250	Т	S	0	1	S	0	2	Τ	0	4	ΑB	ÇĒ	FG	ΗJ				X9 ⁻	9B	
	3	U	0	6	9	250	T	S	0	1	S	0	2	Τ	0	4	ΑB	CE	FG	HJ				Х9	9B	
	4	U	0	7	0	250	T	S	Ó	1	S	0	2	7	0	4	ΑB	CE	FG	HJ				Х9	9B	
	5	IJ	0	7	1	250	Т	s	0	1	S	0	2	1	0	4	ΑB	CE	FG	HJ				X9	9B	
	6	U	0	7	2_	250	Т	S	0	1	S	0	2	T	0	4	ΑB	CE	FG	HJ				X9	9B	
	7	Ų	0	7	3	250	Т	s	0	1	S	0	2	Τ	0	4	ΑŖ	ÇE	FG	HJ				X9	9B	
	8	U	0	7	4	250	T ·	S	0	1	S	0	2	T	0	4	ΑВ	CE	FG	HJ				Х9	9B	
	9	U	0	7	5	250	Ţ	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9	9B	
1	0	U	0	7	6	250	T	S	0	1	S	0	2	T	0	4	ΑB	CE	FG	ΗJ				X9	9B	
1	1	U	0	7	7	250	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
_ 1	2	Ũ	Ō	7	8	250	Т	s	0	1	S	0	2	T	Ö	4	AΒ	CE	FG	ΗJ				X9	9 <u>B</u>	
1	3	U	0	7	9	250	Т	S	0	1	S	0	2	۲	0	4	ΑВ	CE	FG	HJ				X9	9B	
_1	4	Ū	0	8	Ō	250	T	S	0	1	Ş	0	2	Τ	Ö	4	Α <u>B</u>	CE	FG	ΗJ				X9	<u>9</u> B]
1	5	U	0	8	1	250	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	НJ				Х9	9B	
1	6	Ų	0	8	2	250	Т	S	0	1	S	0	2	Т	Q	4	ΑB	CE	FG	ΗJ				X9_	9B	
1	7	U	0	8	3	250	Т	s	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	ΗJ		<u> </u>		Х9	9B	
1	8	υ	0	8	4	250	Т	s	0	1	s	0	2	Т	Q	4	ΑВ	CE	FG	ΗJ		_		X9	9B	
_1	9	U	0	8	5	250	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B	
2	0	U	0	8	6	100	Τ	s	0	1	s	0	2	Τ	Ō	4	ΑВ	CE	FG	HJ		_		X9_	9B	
2	1	U	0	8	7	250	Т	s	0	1	s	0	2	Τ	0	4	ΑВ	CE	FG	HJ	L	<u> </u>	igspace	Х9	9B	
2	2	U	0	8	8	250	Ţ	Ş	Q	1	S	0	2	Τ	0	4	ΑB	CE	FG	ΗJ		<u> </u>		X9	9B	
_2	<u> </u>	U	0	8	9	250	Τ	s	0	1	s	0	2	Т	0	4	_		FG		-			X9		
2		U	0	9	0	250	Т	ş	Ò	1	Ş	0	2	Ţ	Q	4			FG		1	_	igspace	Х9		<u> </u>
2		U	0	9	1	250	Т	S	.0	1	S	0	2	T	0	4	-	-	FG	_	-	_	1	X9		·
2	-	υ	0	9	2	250	Т	S	0	1	S	0	2	Т	0	4			FG		1		\perp	X9		
2		U	0	9	3	250	Τ	S	0	1	S	0	2	Т	0	4	-		FG		_	\vdash	4	Х9		
2		U	0	9	4	250	Ţ	s	Ō	1	S	Ò	2	Т	Q	4			FG		+		4	X9		
2		U	0	9	5	250	Т	S	0	1	S	0	2	T	0	4	_	_	FG	_	_	_	+-	Х9		
3		U	0	9	6	250	Т	S	0	1	S	0	2	Т	0	4			FG	_		_	 	Х9		
3	_	U	0	9	7	100	Т	S	0	1	S	Ó	2	Т	Q	4		_	FĢ		_	<u> </u>	4	Χŷ		
3		U	0	9	8	250	Т	s	0	1	S	0	2	Т	0	4			FG		+-	-	+-	Х9		
Â	3	U	0	9	9	250	Т	s	0	1	S	0	2	Τ	0	4	_	_	FG	_	-		 	Х9		
		U	1	0	1	250	Т	s	0	_1	S	0	2	Τ	0	4	ΑB	CE	FG	HJ				X9	9B	

EP/	A 1[) Nu	mbe	r (Ent	er fro	m page	1)									Sec	ond	агу	ID I	Nun	ber	(Er	iter	fro	m pa	ge 1)
1	L	D	0	0	0	6 0	8	4	7 1																		
Y		escr	iptic	n of H	azaro	lous Wa	ste	s (Co	ntinue	d; u	ise a	add	itior	al s	hee	ts a	s ne	ces	sar	V)							
6				A. EP	A	B. Estima	ited	C. L	Jnit of									D. P	ROC	ESS	ES						•
			н	AZARD	ous	Annua	ļl	Mea	asure																		
Li	ne		١	VASTE	NO.	Quanti	ty	(E	nter	(*	1) PR	OCE	ESS (CODI	ES (E	nter	code)	(2) PR					TION red ir	D(1))	(if a
Nun	nbe	r	(1	Enter Co	ode)	of Was	te	cc	ode)																	_ (- //	
	1	U	1	0	2	250			Т	S	0	1	S	0	2	T	0	4	ΑB	CE	FG	HJ				X9	9B
	2	υ	1	0	3	100			Т	S	0	1	S	0	2	Т	Ò	4	ΑB	CE	FG	HJ				X9 :	9B
	(1)	U	1	0	5	250			Т	S	0	1	S	0	2	Т	0	4	ΑB	ÇE	FG	ΗĴ		_		X9 :	9B _
	4	U	1	0	6	250			Т	S	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ				X9	9B
	5	U	1	0	7	250			T_	s	0	1	s	Ō	2	Т	Ō	4	ΑB	CE	FG	HJ				X9 :	9B
	6	U	1	0	8	250			Т	s	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ				X9	9B
	7	'U	. 1	Ò	9	250			Ţ	Ş	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B
	٤	U	1	1	0	250			Т	s	0	1	s	0	2	Т	0	4	ΑB	CE	FG	ΗJ				X9	9B
	g	U	1	1	1	100			Т	s	Ō	1	s	0	2	Τ	0	4	AB	CE	FG	HJ				X9	9B
1	Ç	U	1	1	2	250			Т	s	0	1	s	Ō	2	Т	0	4	AB	CE	FG	HJ				X9	9B
1	1	U	1	1	3	250			Τ	S	0	1	S	0	2	Т	0	4	AB	CE	FG	HJ				X 9	9B
1	12	U	1	1	4	250			Ţ	S	0	1	s	0	2	Ţ	0	4	ΑB	CE	FG	НJ				Х9	9B
1	(7)	U	1	1	5	100			Т	s	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ				X9	9B
1	4	U	1	1	6	250			Т	s	Ō	1	s	0	2	Ţ	0	4	ΑB	CE	FG	HJ				X9	9B
1	5	U	1	1	7	250			Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X9	9B
1	6	U	1	1	8	250			Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X9	9B
1	7	ľ	1	1	9	250			Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X9 :	9B
1	8	U	1	2	0	250			Т	S	0	1	s	Ò	2	T	0	4	ΑB	CE	FG	HJ				X9_	9B
1	9	U	1	2	1	250			Т	s	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ				X9	9B
2	C	U	1	2	2	250			T	s	0	1	s	0	2	Τ	0	4	AB	CE	FG	HJ				Х9	9B
2	1	U	1	- 2	3	100			Т	s	0	1	s	0	2	T	0	4	ΑB	CE	FG	HJ				X9	9B
2	2	Ü	1	2	4	250			T	s	0	1	S	0	2	Τ	0	4	ΑB	CE	FG	HJ				X9	9B
2	3	U	1	2	5	250			Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X9	9B
2	4	U	1	2	6	250			Т	s	0	1	s	0	2	Т	0	4	ΑB	CE	FG	НJ				X9	9B
2	5	Ų	1	2	7	250			Т	s	0	1	S	0	2	Τ	0	4	ΑВ	CE	FG	HJ				X 9	9B
2	€	U	1	2	8	250			Т	s	0	1	s	0	2	۲	0	4	ΑB	CE	FG	HJ				X9_	9B
2	7	'U	1	2	9	250			Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9	9B
2	٤	U	1	3	0	250			Т	s	0	1	S	0	2	۲	0	4	ΑB	CE	FG	ΗJ				X9	9B
2	9	U	7	3	1	250			T	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				X 9	9B
3	(U	1	3	2	250			Т	s	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B
3	1	U	1	3	3	250			Т	s	0	1	s	0	2	۲	0	4	ΑB	CE	FG	ĤJ				X9	9 <u>B</u>
3	2	2 U	1	3	4	100			Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				Х9	9B
		υ	1	3	5	250			Т	S	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B
4					·															_			_	_	1		

EP/	A ID	Nu	mbe	er <i>(Ent</i> e	er fro	m page 1)								Sec	ond	lary	ID N	lum	ber	(Er	iter	fro	m pa	ge 1)	
	L	D	0	0	0	6 0 8	4 7 1																		
Y		escr	iptic	n of H	azard	lous Wastes	s (Continue	d; u	ıse a	addi	ition	al s	hee	ts a	s ne	ces	sary	()							
				A. EP	4	B. Estimated	C. Unit of									D. P	ROC	ESSI	ES					-	
			Н	AZARD	ous	Annual	Measure																		
Li	ne		١	NASTE !	NO.	Quantity	(Enter	(1) PR	OCE	ss c	ODE	ES (E	nter	code	;)	(2)) PR					TION ered in	D(1))	(If a
Nun	nber		(1	Enter Co	de)	of Waste	code)																	. ,,	
	1	U	1	3	6	100	Т	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	ΗJ				X9 9	В
Г	2	U	1	3	7	250	Т	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9 9	В
	3	U	1	3	8	250	Т	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	ΗJ				X9 9	В
	5	U	1	4	0	250	Т	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9 9	В
	6	Ų	1	4	1	250	Т	S	0	1	s	0	2	T	0	4	AB	CE	FG	HJ				X9 9	В
	7	U	1	4	2	100	Т	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9 9	B
	8	U	1	4	3	100	Ť	S	0	1	S	0	2	T	0	4	AB	CE	FG	HJ				X9 9	В
	9	U	1	4	4	100	Τ	S	0	1	S	0	2	Т	Q	4	ΑB	ÇE	FG	ΗJ				X9 9	В
1	0	U	1	4	5	250	T	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9 9	В
1	1	Ų	1	4	6	100	T	S	0	1	S	Õ	2	T	0	4	ΑB	CE	FG	HJ				X9 9	В
1	2	Ü	1	4	7	100	Т	S	0	1	S	0	2	T	0	4	AB	CE	FG	HJ				X9 9	В
1	3	IJ	1	4	8	250	Т	S	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9 9	В
1	4	U	1	4	9	250	T	S	0	1	S	0	2	T	0	4	ΑВ	CE	FG	HJ				X9 9	B
1	5	U	1	5	0	100	Ţ	s	0	1	S	0	2	T	0	4	ΑВ	CE	FG	HJ				X9 9	B
_1	6	U	1	5	1	250	Т	s	0	1	S	0	2	Т	0	4	ΑB	ÇE	FĢ	ΗJ				X9 9	B
_1	7	U	1	5	2	250	Т	s	0	1	S	0	2	T	0	4	AB	CE	FG	HJ				X9 9	B
1	8	Ų	1	5	3	250	T	S	0	1	S	0	2	Т	Ó	4	Α <u>B</u>	CE	FĢ	HJ				X9 9	B
1	9	U	1	5	4	250	Т	s	0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9 9	В
2	0	Ų	1	5	5	250	Т	S	0	1	S	0	2	T	Ō	4	ΑВ	CE	FG	ΗJ				X9 9	В
2	1	U	1	5	6	100	Т	S	0	1	s	0	2	Т	0	4	AB	CE	FG	HJ				X9 9	В
2	2	Ų	1	5	7	250	Т	s	0	1	S	0	2	T	0	4	ΑB	CE	FG	ΗJ				X9_9) <u>B</u>
2	3	U	1	5	8	250	Т	s	0	1	s	0	2	T	0	4	ΑВ	CE	FG	HJ				X9 9	B
2	4	U	1	5	9	250	T	s	0	1	s	Q	2	Т	Q	4	ΑB	CE	FG	ΗJ			Ш	X9 9	В
2	5	U	1	6	0	100	Т	S	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ		L		X9 9	В
2	6	U	1	6	1	250	Т	s	0	1	s	0.	2	Т	0	4	ΑВ	ÇΕ	FG	ΗJ			Ш	X9 9	B
2	7	U	1	6	2	250	Т	S	0	1	s	0	2	Т	0	4	-	_	FG		_		Ш	X9 9	В
2	8	<u>u</u>	1	6	3	250	Т	S	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ			igspace	X9 9	
2	9	U	1	6	4	250	Т	S	0	1	s	0	2	۲	0	4	ΑВ	CE	FG	HJ		Ļ	$\perp \perp$	X9 9	В
3	O	U	1	6	5	250	Т	s	0	1	S	0	2	Τ	0	4	ΑB	ČΕ	FG	HJ		Ĺ	Щ	X9 9	В
3	1	บู	1	6	6	250	T	S	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ			Ш	X9 9	В
3	2	U	1	6	7	250	T	S	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ			Ш	X9 9	В
3	3	U	1	6	8	250	Т	Ş	0	1	s	0	2	Т	0	4	ΑŖ	CE	FG	ΗJ			Ш	X9 9	В
	4	U	1	6	9	250	T	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X9 9	В
7																									

EP/	A ID	Nu	mbe	er (Ente	er froi	m page 1)								Sec	ond	lary	ID I	Vun	ber	(En	ter	fro	m pa	ige 1	<i>i)</i>	
	L	D	0	0	0	6 0 8	4 7 1																			
Y		escri	iptic	n of H	azard	lous Wastes	s (Continue	d; L	ise a	addi	ition	al s	hee	ts a	s ne	ces	sar	V)								
				A. EP	4	B. Estimated	C. Unit of					_				D. P	ROC	ESSI	ES		_					
			Н	AZARDO	ous	Annual	Measure																			
Li	ne		٧	VASTE I	NO.	Quantity	(Enter	(1) PR	OCE	SS C	CODE	ES (E	nter	code	e)	(2) PR					TION ered ir	n D(1)		(If a
Nun	ber		(E	enter Co	de)	of Waste	code)																		•	
	1	U	1	7	0	250	Т	S	0	1	S	0	2	T	0	4	ΑB	CE	FG	HJ				Х9	9 <u>B</u>	
	2	Ų	1	7	1	250	Т	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X 9	9B	
	3	U	1	7	2	100	Т	S	0	1	S	0	2	Τ	0	4	ΑB	CE	FG	ΗJ				Х9	9B	
	4	U	1	7	3	100	Т	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
	5	Ų	1	7	4	100	T	S	Ó	1	S	0	2	T	0	4	ΑB	CE	FG	HJ				Х9	9B	
	6	U	1	7	6	100	Т	S	0	1	S	0	2	Τ	0	4	ΑB	CE	FG	ΗJ				Х9	9B	
	7	U	1	7	7	100	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
	8	U	1	7	8	100	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X 9	9Bূ	
	9	U	1	7	9	100	T	s	0	1	S	0	2	Τ	0	4	ΑB	CE	FG	HJ				Х9	9B	
1	0	Ų	1	8	0	250	Т	s	0	1	S	0	2	Т	0	4	Α <u>Β</u>	CE	FG	ΗJ				X9	9B	
_1	1	U	1	8	1	250	T	s	0	1	S	0	2	T	0	4	ΑB	CE	FĢ	HJ				Х9	9B	
1	2	U	1	8	2	250	Т	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
1	3	U	1	8	3	250	Т	s	0	1	S	0	2	Т	0	4	ΑB	ÇĒ	FĢ	ΗĴ				Х9	9B	
_1	4	U	1	8	4	250	Т	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	_
_1	5	Ų	1	8	5	250	Т	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
1	6	U	1	8	6	250	Т	S	0	1	s	0	2	T	0	4	ΑВ	CE	FG	HJ				Х9	9B	
_1	7	U	1	8	7	250	Т	s	0	1	S	0	2	Т	Q	4	Α <u>B</u>	CE	FĢ	ΗJ				Х9	9 <u>B</u> _	
1	8	U	1	8	8	250	T	S	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ			·	Х9	9B	
1	9	Ų	1	8	9	250	T	S	0	1	S	0	2	Т	0	4	ΑВ	ÇĘ	FG	ΗJ	-	_		Х9	9 <u>B</u>	
2	0	υ	1	9	0	100	Т	s	0	1	s	0	2	Т	0	4	ΑB	CE	FG	HJ				Х9	9B	
2	1	U	1	9	1	250	Т	s	0	1	s	0	2	Т	0	4	ΑB	CE	FG	ΗJ				Х9	9B	
2	2	U	1	9	2	250	T	s	0	1	S	0	2	T	0		ΑB		_	_		L.	<u> </u>	Х9	9B	
2	3	Ų	1	9	3	250	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FĢ	ΗJ		·		Х9	9 <u>B</u>	
2	_	U	1	9	4	250	Т	S	0	1	s	0	2	۲	0	_	ΑВ			_			 	Х9		
2	5	U	1	9	6	250	Т	S	0	1	s	0	2	Т	0	_	ΑB							Х9		
2	6	U	1	9	7	250	Т	S	0	1	s	0	2	Τ	0	4	ΑВ	$\overline{}$	_		<u> </u>		<u> </u>	Х9		
2		U	2	0	0	250	Т	s	0	1	s	0	2	Т	0	4	-	=	FG	_		_		X9		
2		U	2	0	1_	100	Т	S	0	1	s	0	2	Т	0	4		_	FG		<u> </u>	ļ	 	Х9		
2	9	Ų	2	0	2	250	Т	S	0	1	Ş	0	2	Т	0	4	_		FĢ		L.	<u> </u>		Х9		
3	0	U	2	0	3	250	Т	S	0	1	S	0	2	Т	0	4	_		FG				\perp	Х9	9B	
3	1	U	2	0	4	100	Т	S	0	1	s	0	2	Т	0	4	-	_	FG	_	L.		\downarrow	Х9	9B	
3	2	U	2	0	5	250	Т	Ş	0	1	s	0	2	Т	Q	4	ΑŖ	CE	FĢ	ΗJ		_	1	Х9	9B	
	3	U	2	0	6	250	Т	s	0	1	s	0	2	Τ	0	4	ΑВ	CE	FG	HJ			\perp	Х9	9B	
	4	υ	2	0	7	250	Т	S	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ		_		Х9	9B	
3	5	U,	2	0	8	250	Т	s	0	1	S	0	2	Т	0	4	ΑŖ	CE	FG	ΗJ				X9	9 <u>B</u>	

EPA ID Number (Enter from page 1)						Secondary ID Number (Enter from page 1)																			
	L	Ď	0	Õ	Ö	6 0 8	4 7 1																		
escription of Hazardous Wastes (Continued; use additional sheets as necessary)																									
	A. EPA B. Estimated							D. PROCESSES																	
		HAZARDOUS Annual				Annual	Measure																		
Line		WASTE NO.				Quantity	(Enter	(1) PROCESS CODES (Enter code) (2) PROCESS DESCRIPTION code is not entered in D(1))										(If a							
Nun	Number		(E	nter Co	de)	of Waste	code)											. ,,							
	1	U	2	0	9	250	Т	S	0	1	S	0	2	T	0	4	AB	CE	FG	HJ				X9 9)B
	2	U	2	1	0	250	T	S	0	1	S	0	2	T	0	4	ΑВ	CE	FG	HJ				X9 9	В
	3	U	2	1	1	250	Т	S	0	1	S	0	2	Т	0	4	ΑB	ÇE	FG	ΗJ				X9 9	B
	4	U	2	1	3	250	Т	S	0	1	S	0	2	T	0	4	ΑB	CE	FG	HJ				X9 9	₽B
	5	Ū	2	1	4	100	T	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X9 9	В
	6	U	2	1	5	250	Т	s	.0	1	S	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9 9	В
	7	U	2	1	6	250	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X9 9	9B
	8	Ü	2	1	7	250	Т	S	0	1	S	0	2	Т	0	4	ΑB	ĈΕ	FĢ	HJ				X9 9	В
	9	U	2	1	8	250	T .	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X9 9	В
1	0	Ų	2	1	9	250	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	ΗJ				X9 9	В
1	1	U	2	2	0	250	Т	S	0	1	S	0	2	T	0	4	ΑB	CE	FG	HJ	-			X9 9	ЭВ
1	2	U	2	2	1	250	Т	S	0	1	S	0	2	Т	0	4	AB	CE	FG	HJ				X9 9	ЭВ
1	3	Ũ.	2	2	2	250	Т	S	0	1	S	0	2	Т	Ō	4	ΑB	ÇĘ	FĢ	HJ		-7.		X9 9	9B
1	4	U	2	2	3	250	Т	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X9 9	В
1	5	Ū	2	2	5	250	Τ	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X9 9	ЭВ
1	6	J	2	2	6	250	T	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X9 9	ЭВ
1.	7	ט	2	2	7	250	Т	S	0	1	S	0	2	Т	0	4	ΑŖ	CĒ	FG	HJ			*	X9 9	ЭB
1	8	J	2	2	8	250	Т	S	0	1	S	0	2	T	0	4	ΑB	CE	FG	HJ				X9 9	9B
1	9	Ų	2	3	4	250	Т	S	0	1	S	0	2	T	0	4	ΑВ	CE	FG	ΗJ				X9 9	B
2	0	U	2	3	5	250	Т	S	0	1	s	0	2	T	0	4	ΑB	CE	FG	HJ				X9 9	₽B
2	1	U	2	3	6	250	Т	s	Ö	1	s	0	2	T	0	4	A <u>Β</u>	CE	FĢ	HJ				X9 9	B
2	2	U	2	3	7	250	Т	S	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9 9	В
2	3	υ	2	3	8	250	Ţ	s	0	1	s	0	2	Т	Ò	4	Α <u>B</u>	CE	FG	ΗJ				X9 9	В
2	4	U	2	3	9	250	Т	s	0	1	s	0	2	Т	0	4	ΑВ	CE	FG	HJ				X9 9	В
2	5	\supset	2	4	0	250	. Т	s	0	1	S	Ō	2	Ţ	0	4	AΒ	CE	FĢ	ΗJ	Ĺ			X9 9	β
2	6	U	2	4	3	250	Τ	S	0	1	s	0	2	Т	0	4	_		FG		<u> </u>	Щ.	-	X9 9	
2	7	U	2	4	4	250	Ţ	Ş	0	1	s	0	2	T	0	4		_	FG					X9 9	-
2	8	U	2	4	6	250	Т	S	0	1	S	0	2	Т	0	4			FG		_			X9 9	
2	9	υ	2	4	7	250	Т	S	Ö	1	S	Q	2	Т	0	4	_	_	FG					X9 9	
3	0	υ	2	4	8	250	Т	S	0	1	S	0	2	T	0	4	1		FG		<u></u>			X9 9	
3	1	U	2	4	9	250	T	s	0	1	s	0	2	T	0	4		$\overline{}$	FG	_				X9 9	
3	2	U	2	7	1	250	Т	s	0	1	S	0	2	T	0	4		$\overline{}$	FG		lacksquare			X9 9	
	3	Ū	2	7	7	250	Т	s	0	1	S	0	2	T	0	4	ΑB							X9 9	
	<u> </u>	U	2	7	8	250	Т	s	0	1	s	0	2	Т	0	4	ΑВ							X9 9	
3	5	υ	2	7	9	250	Т	s	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X9_9)B

EPA ID Number (Enter from page 1) Secondary ID Number (Enter from page 1) D 4 7 1 0 8 escription of Hazardous Wastes (Continued; use additional sheets as necessary) B. Estimated C. Unit of A. EPA D. PROCESSES **HAZARDOUS** Annual Measure (2) PROCESS DESCRIPTION (If a (1) PROCESS CODES (Enter code) Line WASTE NO. Quantity (Enter code is not entered in D(1)) Number (Enter Code) of Waste code) S 2 Т 0 S 0 2 0 1 8 0 250 1 Т 4 AB CEIFG lΗJ X9 9B 2 3 2 8 Т S 0 2 250 1 S 0 T 0 4 AB CEIFG HJ X9 9B 3 U 3 5 3 250 Т S 0 1 S 0 2 Т 0 CEIFG **X9** 4 AB HJ 9B 4 3 5 9 250 Т S 0 1 S 0 2 Т 0 4 ABl CEIFG HJ X9 9B 5 Т S 0 2 3 6 4 250 S 0 0 CEIFG 1 Т 4 ABI X9 9B HJ 6 3 6 5 250 Т S 0 1 S 0 2 Т 0 4 ABI CEIFG HJ X9 9B 7 3 6 Т S 0 S 0 2 0 6 250 1 Т 4 ABICEIFG HJ X9 9B 8 3 6 7 Т S 0 S 0 2 U 250 1 T 0 ABICEIFG HJ X9 9B 4 9 3 2 Т 2 Ū 7 250 S 0 1 S 0 Т 0 ABICEIFG X9 4 HJ 9B ABICE|FG 0 3 7 3 Т S 0 S 0 2 Т 0 250 1 4 HJ X9 9B 5 250 Т S 0 S 0 2 0 AB CEIFG 1 Ū 3 7 1 T 4 HJ X9 9B 2 3 7 Т S 0 2 0 6 250 S 0 ABICEIFG **X**9 1 Т 4 HJ 9B 3 U 3 7 7 Т S 0 S 0 2 Т 0 ABICEIFG 250 1 4 HJ **X9** 9B 4 u 3 7 8 250 Т S 0 1 S 0 2 Т 0 4 AB CEIFG HJ X9 9B Т S 2 5 U 3 7 9 250 0 1 S 0 T 0 4 AB CEIFG HJ X9 9B 6 3 1 Т S 0 1 S 0 2 Т 0 AB CEIFG U 8 250 HJ X9 9B 4 7 1 Ū 3 8 2 250 Т S 0 1 S 0 2 T 0 4 AB CEIFG HJ X9 9B 8 3 250 т S 0 S 0 2 Т CEIFG 1 U 3 8 1 0 4 ABI HJ X9 9B 9 250 Т S 0 S 0 2 T 0 4 AB CEIFG 1 U 3 8 4 1 HJ X9 9B 2 0 U 3 5 250 T S 0 S 0 2 T 0 AB CEIFG X9 9B 8 1 4 HJ S S 1 3 8 6 250 T 0 1 0 2 T 0 4 ABICEIFG HJ X9 9B Т S 2 2 U 3 8 7 250 0 1 S 0 2 Т 0 4 ABI CEIFG HJ X9 9B 3 3 T S S 2 T U 9 250 0 1 0 0 4 AB CEIFG HJ X9 9B 8 Т S 0 S 2 T 0 CEIFG X9 9B U 3 250 1 0 HJ 4 9 0 4 ABI 2 5 U 3 9 1 250 T S 0 1 S 0 2 T 0 4 ABl CEIFG HJ X9 9B Т S 0 S 0 2 Т 0 CEIFG X9 6 3 9 250 1 4 AB HJ 9B U 2 7 Т S 0 S 0 2 Т 0 AB CEFG HJ X9 9B 2 3 250 1 4 U 3 9 8 u 3 T S 0 S 0 2 Т 0 AB CEIFG HJ X9 9B 9 4 250 1 4 2 9 U 3 9 5 250 Т S 0 1 S 0 2 Т 0 4 AB CEIFG HJ X9 9B 3 T S 0 1 S 0 2 Ţ 0 4 AB CEIFG HJ X9 9B 3 0 U 9 6 250 T S S 0 2 Т 0 X9 9B 1 U 4 0 0 250 0 1 AB CEIFG HJ 4 S 2 250 Т S 0 1 0 2 Т 0 4 AB CEIFG HJ 9B 3 U 4 0 1 X9 2 T S 0 1 S 0 2 Т 0 4 CE|FG X9 9B 4 0 250 AΒ HJ S S 0 3 250 T 0 2 T 0 **CEIFG** 9B 4 0 1 4 AB HJ X9 5 S S Т 0 2 Т 3 4 0 4 250 0 1 0 4 AB CEIFG HJ X9 9B

Please print or type with ELITE type (12 cheracters per inch) in the un	nshaded areas only GSA No. 0248-EPA-OT
EPA ID Number (Enter from page 1)	Secondary ID Number (Enter from page 1)
I L D 0 0 0 6 0 8 4 7 1	
ap	
Attach to this application a topographic map, or other equivalent map, of the are. The map must show the outline of the facility, the location of each of its existing hazardous waste treatment, storage, or disposal facilities, and each well where h	and proposed intake and discharge structures, each of its
other surface water bodies in this map area. See instructions for precise require	ments.
XVI. Facility Drawing	
All existing facilities must include a scale drawing of the facility (See Instructions	s for more detail).
XVII. Photographs	
All existing facilities must include photographs (aerial or ground-level) that clear and disposal areas; and sites of future storage, treatment or disposal areas (see	
XVIII. Certification(s)	
I certify under penalty of law that this document and all attachments in accordance with a system designed to assure that qualified persor submitted. Based on my inquiry of the person or persons who manaster for gathering the information, the information submitted is, to the best complete. I am aware that there are significant penalties for submitting fine and imprisonment for knowing violations.	nnel properly gather and evaluate the information ge the system, or those persons directly responsible st of my knowledge and belief, true, accurate, and
Owner Storage Vanding	Date Signer
Name and Official Title (Type or print) Anthony Ianello, Executive Director	
Sale Rangaltel	Date Signed 3/08/05
Name and Official Title (Type of print) John E. Lancaster, VP-General Manager	
Janes E Danaster	Date Signed 3/08/05
Name and Official Title (Type or print)	10/00/00
John E. Lancaster, VP-General Manager Operator Signature	Date Signed
Name and Official Title (Type or print)	
XIX. Comments	
	
ail completed form to the appropriate EPA Regional or State Office. (R	efer to instructions for more information)

EP.	A ID	Nu	mbe	r (Ent	er fro	m päge 1)								Sec	ond	ary	ID I	Nur	nbe	r (Ei	nter	froi	n pa	ge	1)	
	۲	D	0	0	0	6 0 8	4 7 1															Ī				
		escr	iptic	n of H	azaro	lous Wastes	(Continue	d; ι	ise a	add	itior	ial s	hee	ts a	s ne	ces	sar	y)		•			•			<u> </u>
J				A. EP	A	B. Estimated	C. Unit of									D. P	ROC	ESS	ES							
	Line		١	AZARD NASTE I Enter Co	NO.	Annual Quantity of Waste	Measure (Enter code)	(1) PF	OCE	ess (CODE	ES (E	nter	code	;)	(2	?) PF				RIPT ente	ΓΙΟΝ red in	n D(1))	(If a
	1	U	4	0	7	250	Ť	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ		[1	X9	9B	
	2	Ų	4	0	8	15,000	T	S	0	1	S	0	2	Т	0	4	ΑB	CE	FG	HJ				X9	9 <u>B</u>	
	3	U	4	0	9	250	Τ	S	0	1	S	0	2	Τ	0	4	ΑB	CE	FG	HJ		Î		Х9	9B	_
	4	U	4	1	0	250	T	S	0	1	S	0	2	Τ	0	4	ΑB	CE	FG	HJ				Х9	9B	
	5	U	4	1	1	250	Т	S	0	1	S	0	2	Τ	0	4	ΑB	CE	FG	HJ				X9	9B	
	6	K	1	8	1	15,000	T	S	0	1	S	0	2	T	0	4	ΑB	CE	FG	HJ	Ī			X9	9B	

.ine		Ī			Α.	PRO	CES	S DE	SIG	N CA	PACI	TY		C	. Pro	cess	"
nter i		•	Code list above	e)		A.	Amo	ount (spec	ify)			 2. Unit of Measure (Enter code)		Tota Num Of U	ber	D. Description of Process
X		Т	Ò	4			•				•						
1	1	Т	0	4	1	4	1	6	ı	0	7	5	U	Q	0	1	TO4E:Treatment of D002 liquids in container and tanks.
1	2	Т	0	4		5	,	0	0	0	•		U	0	0	1	T04F: Treatment of organic peroxides in containers
1	3	Ť	0	4		5	,	0	0	0	•		U	0	0	1	T04G: Treatment of acid cyanides in containers
1	4	Т	0	4	L.	4	1	6	1	0	7	5	 Ü	0	1	0	T04H: Treatment of hazardous waste in containers and tanks using phase separation

			F	۹. Pro	cess	Des	ign C	apacity		_ c	. Pro	æss	
)			1	. Am	ount	(Specify)	2. Unit of Measure (Enter code)		Num	рег	D. Description of Process
Т	0	4						•					
Ť	0	4			5	0	0	0	U	0	0	1	T0-4-I Treatment of Black Powder in contain
Т	0	4		2	5	0	0	0	U	0	0	1	T0-4-J Treatment by the Addition of Dry Ice
T	0	T 4	1		1	0	Ó	Ó		Ιο	0	1	in containers T0-4-K Venting of oxygen to the
		T 0	T 0 4 T O 4 T 0 4	Code (From list above) T	Code (From list above) T	Code 1 (From list above) T 0 4 T O 4 5 T 0 4 5	Code 1. Ame (From list above) T 0 4 T 0 4 5 0 T 0 4 2 5 0	Code 1. Amount (From list above) T	T 0 4	Code (From list above) 1. Amount (Specify) 2. Unit of Measure (Enter code) T 0 4 5 0 0 0 U T 0 4 2 5 0 0 0 U	Code 1. Amount (Specify) 2. Unit of Measure (Enter code) T	Code (From list above) 1. Amount (Specify) 2. Unit of Measure (Enter code) Total Number (Specify) T 0 4 - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -	Code (From list above) 1. Amount (Specify) 2. Unit of Measure (Enter code) Total Number Of Units T 0 4 5 0 0 U 0 0 1 T 0 4 5 0 0 0 U 0 0 1 T 0 4 2 5 0 0 0 U 0 0 1

Form approved, OMB No. 2050-0034 Expires 10/31/02 GSA No. 0248-EPA-OT

ne	•					A	Pro	cess	Desig	gn C	apacity	<i>t</i>		C.	Process	5
Lun	nber	- [C	ode				1.	Amo	ount ,	(Specify)		2. Unit of	7	Total	D. Description of Process
	#s in	(F	rom li	st above)	1							Measure	١	lumber	
	XII)	1				1							(Enter code)		of Units	<u> </u>
1	8	7	Χ	9	Ξ <u>Θ</u> Α			7	Ō	Ō	Ö		U	0	0 1	X99-A Consolidated of pain/paint-
																related material using a compactor
X	Ι	Τ				Т								T		
1	9		x	9	9E	4	8	,	0	0	0		J	0	0	X99-B Hazardous waste shredding
										-						system
X	1	_														
2	0	╀	х	9	90			Ź	3	0	0	•	j	٠,	0	X99-C Hazardous waste lamp crushing
_			^_	3	1 30											system

Clean Harbors Services, Inc. EPA ID No. ILD000608471 Sheet 1 of 3

RCRA PART A FORM ADDITIONAL INFORMATION

Section VIII. Facility Owner

A. Name of Facility's Legal Owner

CHSI is the owner/operator of the hazardous waste facility. The land on which the facility is located is owned by the Illinois International Port District, a government entity.

VIII. (Owne	r Inf	orm	atio	n (S	ee i	nst	ructi	ons)																
A. Na	me of	Ow	ner																							
C	Ŀ	E	Α	N		Н	Α	R	В	0	R	S		S	E	R	V	Ι	Ĉ	E	S		1	N	C	
Stree	t or P	.O. E	30x											Р												
1	1	8	Ó	0		S	0	U	T	H		S	T	0	N	Υ			S	L	Α	N	D		Α	V
City o	r Tov	νņ						-										Sta	të	Zip	Cō	jē				
O	Н		C	Α	G	0				\square									L	6	0	6	1	7		
										_;																
										٠. ر			B. C	wner	Тур	е	C. C	hang	je of	Owr	ner	Date	Cha	nge	3	-
Phone	Numbe	er <i>(Ar</i>	ea C	ode	and f	Vuml	ber)										In	dicat	or		_	F	Mont	h	Day	
7	7	3	-	6	4	6	-	6	2	0	2			Р			Yes		No	X]					

Section XII. Process Codes and Design Capacity

Line 05. Disposal in Surface Impoundments (D83)

CHSI notes that the four (4) surface impoundments identified by this entry have been certified as closed by the IL EPA. The impoundments no longer accept hazardous waste, and currently operate under an approved Post Closure management plan. A list of the waste codes which were disposed in the impoundments is included in Appendix D-30 of the approved RCRA Part B Application.

Section XIII Additional Processes

Line 11. T04 E Treatment of D002 Liquids in Containers and Tanks

Treatment of D002 (Corrosive) liquid hazardous waste in containers and tanks by the commingling/mixing of compatible waste streams to adjust pH value. Process design capacity is 416,075 gallons per day in all tank or container systems at the facility.

Line 12. T04F Treatment of Organic Peroxides in Containers

Treatment of organic peroxide hazardous waste in containers through the addition of water. Process design capacity is 5,000 gallons per day in any container at the facility.

Rev. February 2, 2005

Clean Harbors Serivces, Inc. EPA ID No. ILD 000608471 Sheet 2 of 3

Line 13. T04G Treatment of Acid Cyanides in Containers

Treatment of acid cyanide hazardous waste in containers through pH adjustment using sodium hydroxide or other alkaline materials. Process design capacity is 5,000 gallons per day in any container at the facility.

Line 14. T04H Treatment of Hazardous Waste in Containers and Tanks
Using Phase Separation

Treatment of hazardous waste in containers and tanks by phase separation using physical (e.g., gravity separation, filtration) and chemical (e.g., addition of demusifiers) techniques. Process design capacity is 416,075 gallons per day in all tank or container systems at the facility.

Line 15. T04l Treatment of Black Powder in Containers

Treatment of black powder hazardous waste in containers through the addition of water. Process design capacity is 5,000 gallons per day in any container at the facility.

Line 16. T04J Treatment by the Addition of Dry Ice in Containers

Treatment of hazardous waste in containers by the additon of dry ice. Process design capacity is 25,000 gallons per day in any container at the facility.

Line 17. T04K Venting of oxygen to the atmosphere.

Process design capacity is 1,000 pounds per hour.

Line 18. X99A Consolidation of Hazardous Waste using a Compactor

Consolidation of hazardous waste paint and paint-related material contained in small metal and glass containers by processing through a can and glass compactor. Process design capacity of the unit is 7,000 pounds per day of cans of paint and paint-related material.

Line 19. X99B Hazardous waste shredding system

Shredding of hazardous waste in containers. Process design capacity is 48,000 pounds per hour.

Line 20. X99C Hazardous waste lamp crushing system

Crushing of hazardous waste lamps. Process design capacity is 2300 pounds per hour.

Rev. February 2, 2005

Clean Harbors Serivces, Inc. EPA ID No. ILD 000608471 Sheet 3 of 3

Section XIV. Des

Description of Hazardous Waste

CHSI notes that Process Code "T01A" in C Column D (2) refers to the Listed Waste Treatment System identified on Line 06 in Section XII.

CHSI also notes that Process Codes "T0A" through "T04K" refers to the various container an/or tank treatment processes described in Lines 07 through 17 in Section XIII.

Rev. March 15, 2004



11800 South Stony Island Avenue Chicago, IL 60617 773.646.6202 Fax 773.646.6381

NOTICE

October 23, 2003

To: Facility Mailing List Addresses

Re: Clean Harbors Services, Inc.

Notification of RCRA Class 1 Permit Modification

Clean Harbors Services, Inc. (CHSI) is a permitted hazardous waste treatment, storage and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHSI currently operates under a RCRA Part B permit issued by the IEPA on September 30, 1993.

On July 28, 2003 CHSI requested a Class 1 permit modification to the facility's Contingency Plan including adding a new primary emergency coordinator. This Class 1 modification was approved by IEPA on September 18, 2003.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations in 35 IAC 703.281(a)(2) which require a notice of the modification be sent to all persons on the facility mailing list within 90 days after the change is put into effect or within 90 days of IEPA approval.

If you have any further questions regarding this notice, please contact me at (773) 646-6202, x233.

Sincerely,

James R. Laubsted

Facility Compliance Manager

- n 740

NOTICE

September 17, 2002

To: Facility Mailing List Addresses

Re: Clean Harbors Services, Inc.

Notification of RCRA Class 1 Permit Modification

Clean Harbors Services, Inc. (CHSI) is a permitted hazardous waste treatment, storage and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHSI currently operates under a RCRA Part B permit issued by the IEPA on September 30, 1993.

On June 19, 2002 CHSI requested a Class 1 permit modification to the facility's Contingency Plan including adding a new primary alternate emergency coordinator and moving the former primary alternate emergency coordinator to primary emergency coordinator. This Class 1 modification was approved by IEPA on September 5, 2002.

This notice is being sent to you in accordance with IEPA's Class 1-permit modification regulations in 35 IAC 703.281(a)(2) which require a notice of the modification be sent to all persons on the facility mailing list within 90 days after the change is put into effect or within 90 days of IEPA approval.

If you have any further questions regarding this notice, please contact me at (773) 646-6202, x233.

Sincerely,

James R. Laubsted

Facility Compliance Manager

n Lets



11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 60617 (773) 646-6202 • FAX (773) 646-6381

NOTICE

January 22, 2002

To: Facility Mailing List Addresses

Re: Clean Harbors Services, Inc.

Notification of RCRA Class 1 Permit Modification

Clean Harbors Services, Inc. (CHSI) is a permitted hazardous waste treatment, storage and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHSI currently operates under a RCRA Part B permit issued by the IEPA on September 30, 1993.

On October 25, 2001 CHSI requested a Class 1 permit modification to the facility's Contingency Plan including adding a new primary alternate emergency coordinator, changing the contact names for several emergency assistance organizations, changing an organization's name and changing an organization's phone number. This Class 1 modification does not require prior approval from IEPA.

On September 19, 2001 CHSI requested a Class 1 permit modification to manage 2 newly listed hazardous wastes, K174 and K175. These wastes were finalized by USEPA on November 8, 2000 and became effective on May 7, 2001. IEPA approved the Class 1 modification on November 28, 2001.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations in 35 IAC 703.281(a)(2) which require a notice of the modification be sent to all persons on the facility mailing list within 90 days after the change is put into effect or within 90 days of IEPA approval.

If you have any further questions regarding this notice, please contact me at (773) 646-6202, x233.

Sincerely.

James R. Laubsted

Facility Compliance Manager

n Tobotal



SERVICES, INC.

11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 60617 (773) 646-5111 • FAX (773) 646-0026

Visit our Website at www.cleanharbors.com



WASTE MANAGEMENT B.A.A.A.A.W.H. Waste, Pesticides & Toxics Division U.S. EPA = REGION 5

NOTICE

July 19, 2001

To: Facility Mailing List Addresses

Re: Clean Harbors Services, Inc.

Notification of RCRA Class 1 Permit Modification

Clean Harbors Services, Inc. (CHSI) is a permitted hazardous waste treatment, storage, and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHSI currently operates under a RCRA Part B permit issued by the IEPA on September 30, 1993.

On April 20, 2001 CHSI requested a Class 1 permit modification to the facility's RCRA Part B permit to relocate the facility emergency siren. This modification has been approved by IEPA.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations in 35 IAC 703.281(a)(2) which require CHSI to send a notice of the modification to all persons on the facility mailing list within 90 days after the change is put into effect or within 90 days after IEPA approval if prior approval is required.

If you have any further questions regarding this notice, please feel free to contact me at (773)646-6202.

Sincerely,

Jámes R. Laubsted

n Jeto

CHSI Facility Compliance Manager

cc: Facility Mailing List



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

REGION 5 77 WEST JACKSON BOULEVARD CHICAGO, IL 60604-3590

JUN 18 2001

REPLY TO THE ATTENTION OF:

CERTIFIED MAIL: 7099 3400 0000 9599 0194 RETURN RECEIPT REQUESTED

DW-8J

James R. Laubsted Clean Harbors Services Inc. 11800 South Stony Island Ave. Chicago, IL 60617

RE:

Class 1 Permit Modification Request

Clean Harbors Services Inc.

ILD 000 608 471

Dear Mr. Laubsted:

On May 7, 2001, the United States Environmental Protection Agency (U.S. EPA) received your Class 1 permit modification request to include the newly listed wastes (K-174 and K-175) which became effective on May 7, 2001. These newly listed wastes were promulgated by the U.S. EPA under the Hazardous and Solid Waste Amendments of 1984 (65 FR 67118, November 8, 2000). Clean Harbors Services Inc. submitted a Class 1 permit modification to continue to handle these newly listed wastes at your hazardous waste management facility.

The U.S. EPA acknowledges the receipt of your Class 1 permit modification request in accordance with 40 CFR § 270.42(g)(ii). Please submit a Class 2 modification request to the U.S. EPA on or before November 6, 2001, in accordance with 40 CFR § 270.42(g)(iv) to continue handling these wastes.

If you have any questions on this matter, please contact Mr. James Blough at (312) 886-2967.

Sincerely,

Paul Little, Acting Chief Waste Management Branch

cc: Ted Dragovich, IL EPA

U.S. Postal Service CERTIFIED MAIL RECEIPT (Domestic Mail Only; No Insurance Coverage 0 Article Sent To: Laubsted 0 Postage 5 Certified Fee Postmark Here 0000 Return Receipt Fee (Endorsement Required) Restricted Delivery Fee (Endorsement Required) **Total Postage & Fees** m Name (Please Print Clearly) (to be completed by mailer Har burs Spanishes 660 Street, Apt. No.; or PO Box No. City, State, ZIP+4 Chicase PS Form 3800, July 1999

Certified Mail Provides:

A unique id er for your mailpiece

- A signature upon delivery
- A record of delivery kept by the Postal Service for two years

Important Reminders:

- Certified Mail may ONLY be combined with First-Class Mail or Priority Mail.
- Certified Mail is not available for any class of international mail.
- NO INSURANCE COVERAGE IS PROVIDED with Certified Mail. For valuables, please consider Insured or Registered Mail.
- For an additional fee, a Return Receipt may be requested to provide proof of delivery. To obtain Return Receipt service, please complete and attach a Return Receipt (PS Form 3811) to the article and add applicable postage to cover the fee. Endorse mailpiece "Return Receipt Requested". To receive a fee waiver for a duplicate return receipt, a USPS postmark on your Certified Mail receipt is required.
- For an additional fee, delivery may be restricted to the addressee or addressee's authorized agent. Advise the clerk or mark the mailpiece with the endorsement "Restricted Delivery".
- If a postmark on the Certified Mail receipt is desired, please present the article at the post office for postmarking. If a postmark on the Certified Mail receipt is not needed, detach and affix label with postage and mail.


IMPORTANT: Save this receipt and present it when making an inquiry.

PS Form 3800, July 1999 (Reverse)

102595-99-M-2087

in the reverse side?	Complete items 1 and/or 2 for additional services. Complete items 3, 4a, and 4b. Print your name and address on the reverse of this form so that we card to you. Attach this form to the front of the mailpiece, or on the back if space permit. Write "Return Receipt Requested" on the mailpiece below the article. The Return Receipt will show to whom the article was delivered and delivered.	e does not e number.	I also wish to receive the following services (for an extra fee): 1. Addressee's Address 2. Restricted Delivery Consult postmaster for fee.
N ADDRESS completed o	3. Article Addressed to: James Landsted 11800 South 5 to noon 2 3 Nor Chicago 1 211 6067 33 Nor	4b. Service ☐ ☐ Registere ☐ Express I	Type Id Certified Mail Insured
Is your RETUR	5. Received By: (Print Name) 6. Signature: (Addressee or Agent) PS Form 3811, December 1994	8. Addressee and fee is	Price Address (Only if requested paid) Domestic Return Receipt

UNITED STATES POSTAL SERVICE



Print your name, address, and ZIP Code in this box

Jim Blough

Region 5 ASS 77 West Jackson

Chicago, IL 60604

F:\USER\SHARE\R&Binfo\class mods\class 1 mods\CH.wpd

Waste Management Branch

SECRETARY	SECRETARY	SECRETARY	SECRETARY
AUTHOR	TSPS CHIEF	WMB CHIEF	WPTD DIRECTOR
43	Ap C6/6/1	CUM	

Jay actoring



11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 60617 (773) 646-6202 • FAX (773) 646-6381 Visit our Website at www.cleanharbors.com

Certified Mail # 7099 3400 0015 2715 1831

May 7, 2001

Mr. James Blough U.S. Environmental Protection Agency RCRA Permit Section, Mail Code DW-8J 77 West Jackson Boulevard Chicago, IL 60604-3590

Dear Mr. Blough:

Clean Harbors Services, Inc. (CHSI) is submitting a Class 1 permit modification request to the facility's RCRA Part B Permit for authority to manage two newly-listed hazardous wastes finalized by USEPA on November 8, 2000 (see Federal Register Volume 65, Number 217). The newly listed codes are wastewater treatment sludges from the production of ethylene dichloride or vinyl chloride monomer and are identified by USEPA waste code numbers K174 and K175. The new codes become effective May 7, 2001.

In accordance with the requirements of 40 CFR 270.42(g), CHSI is enclosing a revised RCRA Part A form to notify the Agency of CHSI's intent to manage the new codes. Within 90 days of the date of the effective date of the rule, CHSI shall notify all persons on the facility mailing list of this Class 1 permit modification request. In addition, within 180 days of the date of the effective date, CHSI shall submit a Class 2 modification request for final Agency approval.

If you have any questions or require additional information, please contact me at (773) 646-6202, x233.

Sincerely,

James R. Laubsted

Facility Compliance Manager

W. Japas

For EPA Regi	onai	type (12 characters per in							Ι	7,44,111	0248-EPA
Use Only				EP	Α						
	1	Und	ted St		ntal Protection A	gency					
			u	Washington.	oc 20460 /aste Pern	nit					
		•	Паг			11.5					
ate Received	Year			Applic					1		
			/ On	Part Part Part Part Part Part Part Part Part	l <u>A</u> ns before startin	17 1			1		
installation's E	PA ID Nur	nber (Mark 'X' in the app			ng odrare startin		- 				
A. First	Part A Sub	mission			X 8. Par	t A Amend	iment #_	_			
. Installation's	EPA ID Nu	mber		D. Secondary	/ ID Number (If	applicable	0)				
		08471					-		7		
I. Name of Faci	<u></u>						*	<u></u>			
CLEA	N H A	RBORS SE	E R	VICES	INC						
		iical address not P.O. Bo									
A. Street				 			, , , , , , , , , , , , , , , , , , , 			-	
1180	0 S O	UTH STON	Y	ISLAN	ND AVI						
Street (Continu								_			-
				·	******						
City or Town						State	Zip Co	de			
CHIC	A C O					7.7	6 0 6	5 1 7		-	
ounty Code	County N	ame		<u> </u>							
(,, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	C 0 0	K									
B. Land Type		raphic Location		<u>-</u>				D. Fac	ulity Exist	ence C	ate
(Enter code)		E (Degrees, Minutes, & S	econ	s) LONGITUDI	E (Degrees, Mir	utes & Sec	conas)	Monti	Oay		Year
S	4 1	40044		0 8 7	3 4 0	4 6		0 7	2 9	l ·	9 8 0
IV. Facility Mai	iling Addre	31		-							
Street or P.O. I	Box			· · · · · · · · · · · · · · · · · · ·							
	0 5 0	UTU CTON	1 Y	ISLA	N D A V	E					
1180		' U L M				7.	710.00				
1 1 8 0		UTH STON				State	Zip Co	900			
City or Town		OUT STOR				State I L		6 1 7			
City or Town C H I C	A G O										
City or Town C H I C	A G O						6 0				
C H I C V. Facility Cor Name (Last)	A G O	on to be contacted regal			s at facility) (First)	IL	6 0				
City or Town C H I C V. Facility Cor	A G O	on to be contacted regal			s at facility)	I L	6 0	6 1 7			.: •
City or Town C H I C V. Facility Cor Name (Last) L A U B Job Title	A G O	on to be contacted regar			s at facility) (First) JAME	I L	6 0	6 1 7	nr)		1
City or Town C H I C V. Facility Cor Name (Last) L A U B Job Title C O M P	A G O	on to be contacted regal			(First) J A M I Phone Num	I L	6 0	6 1 7	nr)		1
City or Town C H I C V. Facility Cor Name (Last) L A U B Job Title C O M P VI. Facility Co	A G O ntact (Pers S T E L I A ntact Add	on to be contacted regard			(First) J A M I Phone Num	I L	6 0	6 1 7	nr)		7
City or Town C H I C V. Facility Cor Name (Last) L A U B Job Title C O M P VI. Facility Co A. Contact Ad Location Mailing	A G O ntact (Pers S T E L I A	D N.C.E. M.G.R. ress (See instructions)			(First) J A M I Phone Num	I L	6 0	6 1 7	nr)		
City or Town C H I C V. Facility Cor Name (Last) L A U B Job Title C O M P VI. Facility Co	A G O ntact (Pers S T E L I A ntact Add	D N.C.E. M.G.R. ress (See instructions)			(First) J A M I Phone Num	I L	6 0	6 1 7	nr)		

ros. OMB No. 2050-0034 Expires 10/31/99 Please print or type with ELITE type (12 characters per inch) in the unshaded areas only 3SA No. 0248-EPA-OT EPA I.D. Number (Enter from page 1) Secondary ID Number (Enter from page 1) ILDO 00608471 VII. Operator Information (See instructions) Name of Operator CLEAN HARBORS SERVICES INC Street or P.O. Box 11300 SOUTH STONY ISLAND AVE City or Town State ZIP Code I L CHICAGO 60617 B. Operator Type C. Change of Operator **Date Changed** Phone Number (Area Code and Number) Indicator Month Day Year No X 7 7 3 - 6 4 6 - 6 2 0 2 P Yes VIII. Facility Owner (See Instructions) A. Name of Facility's Legal Owner Illinois International Port District Street or P.O. Box 3600 East 95th Street City or Town State **ZIP Code** 60617 CHICAGO IL **B.** Owner Type C. Change of Owner Date Changed Phone Number (Area Code and Number) Indicator Month Day Year 773-646-4400 P No X IX. SIC Codes (4-digit, in order of significance) Primary Secondary (Description) (Description) 4 9 5 3 REFUSE SYSTEMS Secondary Secondary (Description) (Description) X. Other Environmental Permits (See instructions) A. Permit Type C. Description (Enter code) **B.** Permit Number B -1 6 IEPA RCRA PART B R R D 0 0 0 6 0 8 4 7 1 USEPA HSWA PERMIT IL

9

3

80-36-0 P

-0889

-1301

TE

84 - EP

1600B

9 0 - E N

IEPA LAND (OPERATIONS)

IEPA LAND (OPERATIONS)

IEPA WATER POLLUTION CONTROL



Secondary ID Number (Enter from page 1)

ILD000608471

XI. Nature of Business (Provide a brief description)

Clean Harbors Services, Inc. (CHSI) offers a liquid industrial waste pretreament service. CHSI accepts hazardous and non-hazardous wastewaters which do not meet sewer discharge specifications. Through physical and chemical treatment. CHSI produces and effluent acceptable for sewer discharge and a dewatered sludge. The effluent is discharged into the Metropolitan Water Reclamation District of Greater Chicago sewer system and the sludge is shipped to properly-licensed offsite treatment and/or disposal facilities. CHSI also accepts hazardous and non-hazardous waste, which is stored in tanks and contains subsuggestly transferred to properly-licensed offsite treatment/and or disposal facility.

XII. Process Codes and Design Capacities

- A. PROCESS CODE Enter the code from the list of process codes below that best describes each process to be used at the facility. Thirteen lines are provided for entering codes, if more lines are needed, attach a separate sheet of paper with the additional information. For "other" processes (i.e., D99, S99, T04 and X99), describe the process (including its design capacity) in the space provided in item XIII.
- B. PROCESS DESIGN CAPACITY For each code entered in column A, enter the capacity of the process.

APPROPRIATE LINITS OF

- AMOUNT Enter the amount. In a case where design capacity is not applicable (such as in a closure/post-closure or enforcement action) enter the total amount of waste for that process.
- UNIT OF MEASURE For each amount entered in column 8(1), enter the code from the list of unit measure codes below that
 describes the unit of measure used. Only the units of measure that are listed below should be used.
- C. PROCESS TOTAL NUMBER OF UNITS Enter the total number of units used with the corresponding process code.

PROC		APPROPRIATE UNITS OF MEASURE FOR PROCESS	PROC		APPROPRIATE UNITS OF MEASURE FOR PROCESS
CODI	PROCESS	DESIGN CAPACITY	CODE	PROCESS	DESIGN CAPACITY
D79	Olsposal: Underground Injection	Gallons: Liters: Gallons Per Day;	T87 T88	Smelting, Melting, Or Refining Furnace Titanium Dioxide	
	Landfill	or Liters Per Day Acre-feet or Hectare-meter	100	Chloride Process	
	Land Treatment	Acres or Hectares		Oxidation Reactor	
D82 D83	Ocean Disposal	Gallons Per Day r Liters Per Day	789	Methane Reforming	Gallons Per Day; Liters Per
D99	Surface impoundment Other Disposal	Gallons or Liters Any Unit of Measure Listed Below	790	Putping Liquor	Dav: Pounda Per Hour: Short
J J J	Storage:	ANY UNIT OF MEESURE LISTED BEION		Recovery Furnace	> Tons Per Hour: Kilograms
S01	<u>ammyv:</u> Container	Gallons or Liters	791	Combustion Device	Per Hour; Metric Tons Per
	(Barrel, Drum, Etc.)		'''	Used in The Recovery	Day; Metric Tons Per Hour;
S02		Gallons or Liters	[Of Sulfur Values From	Short Tons Per Day; or Btu's
S03	Waste Pile	Cubic Yards or Cubic Meters	11	Spent Sulfuric Acid	Per Hour
504	Surface Impoundment	Gallons or Liters	T92	Halogen Acid Furnaces	
S05	Orip Pad	Gallons or Liters	793	Other Industrial	
S06	Containment Building-Storage	Cubic Yards or Cubic Meters	[[Furnaces Listed in 40 CFR §260.10	
S 99	Other Storage Treatment:	Any Unit of Measure Listed Below	794	Containment Building-Treatment	Cubic Yards or Cubic Meters
T01	Tank	Gallons Per Day or Liters Per Day	11	Miscellaneous (Subpart X	Q:
TO2	Surface Impoundment		X01	Open Burning/Open	Any Unit of Measure Listed
TO3	Incinerator	Short Tons Per Hour; Metric Tons	11	Detonation	Below
		Per Hour; Gallons Per Hour; Liters	XOZ	Mechanical Processing	Short Tons Per Hour; Metric
		Per Hour; or Btu's Per Hour	11		Tons Per Hour: Short Tons
T04	Other Treatment	Gallons Per Day; Litera Per Day;	11		Per Day; Metric Tona Per Day Pounds Per Hour; or
	•	Pounds Per Hour; Short Tons Per	11		Kilograms Per Hour
		Hour: Kilograms Per Hour: Metric	X03	Thermal Unit	Gallons Per Day; Liters Per
		Tons Per Day; Metric Tons Per Hour: Short Tons Per Day; or		in ernei Unit	Day: Pounds Per Hour: Shor
		Ritu's Per Hour	11	•	Tons Per Hour: Kilograms Pe
TBO	Boiler	Gallons or Liters	11		Hour; Metric Tons Per Day;
181	Cement Klin	Gallons Per Day; Liters Per Day;			Metric Tons Per Hour: Short
782	Lime Kiin	Pounds Per Hour; Short Tons Per]]		Tons Per Day; or Btu's Per
183	Aggregate Kiin	Hour: Kilograms Per Hour: Metric	11		Hour
T84	Phosphate Kiln	Tons Per Day; Metric Tons Per	X04	Geologic Repository	Cubic Yards or Cubic Meters
T85	Coke Oven	Hour: Short Tons Per Day; or	X99	Other Subpart X	Any Unit of Measure Listed
786	Blast Furnace	Btu's Per Hour	Н		Below

UNIT OF MEASURE	UNIT OF MEASURE CODE	UNIT OF MEASURE	UNIT OF MEASURE CODE	UNIT OF MEASURE	UNIT OF MEASURE CODE
Gallons	E U L	Metric Tons Per D Short Tons Per D Metric Tons Per Pounds Per Hou	lour	Cubic Yards Cubic Meters Acres Acre-feet Hectares Hectare meter Btu's Per Hour	

EPA I.D. Number (Enter from page 1)	
-------------------------------------	--

Secondary ID Number (Enter from page 1)

ILD000608471

XII. Process Codes and Design Capabilities (Continued)

EXAMPLE FOR COMPLETING ITEM XII (Shown in line number X-1 below): A facility has a storage tank, which can hold 531.788 gallons.

Lin			roces	3	B. PROCESS DESIGN CAPACITY		C. Process	For Office	
Num		(From	ode es: es:	, ee	1. Amount (Specify)	2. Unit Of Measure (Enter code)	Total Number Of Units	Use On	iy
X I	1	SI	0	2	533.788	G	0 0 1		
	1	s	0	1	162,305 (2951 X 55-GAL. EQUIVALENT)	G_	2951		
	2	s	0	1	360 (12 X 30 CUBIC YARDS EQUIVALENT)	Y	012		
	3	s	0	1	268.800 (TRANSPORTATION VEHICLES)	G	031		
	4	S	0	2	306,336	G	037		
	5	D	8	3	2,000,000	G	004		
	6	T	0	1	A 200,000	บ	001		
	7								
	8								
	9					l			
1	0								
1	1								
1	2						1		
1	3								

NOTE: If you need to list more than 13 process codes, attach an additional sheet(s) with the information in the same format as above. Number the lines sequentially, taking into account any lines that will be used for "other" processes (i.e., D99, S99, T04 and X99) in item XIII.

XIII. Other Processes (Follow instructions from item XII for D99, S99, T04 and X99 process codes)

Line				oce	_			B. PROCESS DESIGN CAPACITY			C. Process	D. Description Of Process
Number (Enter 4s in 109 w/XII)	1			de It at		~,		1. Amount (Specin)	2. Unit Of Measure (Enter code)	1	Total Number Of Units	
X 1	T	T	Ī	0	1	4						In-situ Vitrification
. 1		T		0		4		12,000	ט		001	TO4A: Treatment of DO02 liquid/solid mixtures in
												containers by removal of liquid
2	I	T		0		4		3,000	U		001	TO4B: Compaction of
							,					hazardous waste solids in containers
3	I	T		0		4		55,000	U		001	TO4C: Hazardous waste
												fuel blending
4	1	T	1	0	T	4	T	600	U		010	TO4D: Stabilization/
	_											fixation of hazardous waste in roll-off
ĺ												containers

-orm Approved, UMB No. 2030-0034 Expres 10/31/99
3SA No. 0248-EPA-07

Secondary ID Number (Enter from page 1)

EPA I.D. Number (Enter from page 1)	
LEA I.C. AURIDER (ERIGE FORM DEGE 1)	

ILD000608471

XII. Process Codes and Design Capabilities (Continued)

EXAMPLE FOR COMPLETING ITEM XII (Shown in line number X-1 below): A facility has a storage tank, which can hold \$33,788 gations.

	Line A. Process				3	B. PROCESS DESIGN CAPACITY			rocess		Offi		
Num	bei	- 1	Co.		· • • • • • • • • • • • • • • • • • • •	1. Amount (Species)	Unit Of leasure	No	otal Imber Units	U	ie Or	ity	
X	1		si	0	2	533.788	G	0	0 1	1			
	1		-	1									
	2		;			·							
	3												
	4												
	5												
	; 6												
	7	,											
	8												
	9	,	Ī						_				
	1	,				·							
1	1	1											
	:	2											
1	Ţ,	3											

NOTE: If you need to list more than 13 process codes, attach an additional sheet(s) with the information in the same format as above. Number the lines sequentially, taking into account any lines that will be used for "other" processes (i.e., D99, S99, T04 and X99) in item XIII.

XIII. Other Processes (Follow instructions from item XII for D99, S99, T04 and X99 process codes)

Line	A. Process	B. PROCESS DESIGN CAPACITY		C. Process	D. Description Of Process
Number i Enter 44 m i sag w/Xh	Code (From set epovo)	1. Amount (Speep)	2, Unit Of Measure	Total Number Of Units	
X I 1	T 0 4				In-situ Vitrification
1 1	T 0 4	416,075.00	ū	001	TO48: Treatment of DO02
					liquids in containers and tanks
1 2	T 0 4	5,000.00	U -	001	TO4F: Treatment of
	, _				organic peroxides in containers
1 3	T 0 4	5,000.00	g	901	TO4G: Treatment of acid cyanides in containe
					acra changa ra containe
1 4	T 0 4	416,075.00	U	001	TO4H: Treatment of
					hazardous waste in containers and tanks using phase separation

EPA I.D.	Num	ber (Enter 1	rom page 1)		Secondary ID	Number (Ente	er trom (page 1)			_ \
īL	۵ .	0 0	0 6	08471								\Box
XII. Proc	:038 (Code	and I	Design Capabilitles (Continued)								
	KAM F tilons		OR C	OMPLETING ITEM XII (Shown in line number X-1 b	elow): A fa	icility has a st	orage tank, wn	ich can	hold 5	33.78	8	
Line Number	1	roce Code	33	B. PROCESS DESIGN CAPAC	πΥ		C. Process		For Off			
		41 40	,	1. Amount (Specify)		2 Unit Of Measure (Enter code)	Number		Use C	y		
X 1	s	0	2	5 3 3	. 788	G	0 0 1				1	
1					<u> </u>							
2					<u> </u>							
3	_						<u> </u>					
4	<u> </u>				·		<u> </u>		<u>.</u>			
5	╀-			· 			 					
6	<u> </u>	<u> </u>			<u> </u>		- 	 	 		2	- -
7	╀	<u> </u>			<u> </u>		- 	╄╌┼	-	-		
8	╀	 			·					┼		
9	╄	+-			·			+	+-	-		
1 0	+-	+-	-		<u>.</u>			1	+	+-	\vdash	
111	╀	+-	 		<u> </u>			1-1	+	+-	-	-
1 3	+	+-	-		·			-		+-	-	-
^	IOTE	: If yo	u nee	d to list more than 13 process codes, attach an ad	ditional sh	eet(s) with the	information ii	the sa	me for	net a	5	
a	bove	. Nun	item .	e lines sequentially, taking into account any lines	that will b	e used for "oti	her" processe:	s (i.e., D	99, S9	9. 104	! 	
XIII. O	ther	Proce	15205	Follow instructions from item XII for D99, S99, TD	4 and X99 ;	process codes	1)					
Line	[. Pro	4 -	B. PROCESS DESIGN CAPACITY		C. Process	D. 1	Descript	tion Of	Proc	ess	
(Enter 4s 109 w/()	m (Fr			1. Amount (Specify)	2. Unit Of Measure (Enter come	Number						
X 1	1	ric) 4				11	-situ VI	trificet	ion		-
2 1		(9	9	7,000.00	U	001	X99A: Co				£	
				· ••			paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/paint/				pac	to
-					r					_	_	_
2 2	,	c 9	9 9	48,000.00	J	1 001	х99в:	Hazar shre				
							1					
		1	<u> </u>		1	1	1			_	_	
 -		<u>!</u>			<u>. </u>		1					
			_									
1	•			·								
										_	_	

:

Secondary ID Number (Enter from page 1)

I L D O O O 6 O 8 4 7 1

XIV. Description of Hazardous Wastes

- A. EPA HAZARDOUS WASTE NUMBER Enter the four-digit number from 40 CFR, Part 261 Subpart 0 of each listed hazardous waste you will handle. For hazardous wastes which are not listed in 40 CFR, Part 261 Subpart 0, enter the four-digit number(s) from 40 CFR, Part 261 Subpart C that describes the characteristics and/or the toxic contaminants of those nazardous wastes.
- B. ESTIMATED ANNUAL QUANTITY For each listed waste entered in column A estimate the quantity of that waste that will be handled on an annual basis. For each characteristic or toxic contaminant entered in column A estimate the total annual quantity of all the non-listed waste(s) that will be handled which possess that characteristic or contaminant.
- C UNIT OF MEASURE For each quantity entered in column 8 enter the unit of measure code. Units of measure which must be used and the appropriate codes are:

ENGLISH UNIT OF MEASURE	CODE	METRIC UNIT OF MEASURE	CODE
POUNDS	P	KILOGRAMS	К
TONS	r	METRIC TONS	м

If facility records use any other unit of measure for quantity, the units of measure must be converted into one of the required units of measure taking into account the appropriate density or specific gravity of the waste.

O. PROCESSES

1. PROCESS CODES:

For listed hazardous waste: For each listed hazardous waste entered in column A select the code(s) from the list of process codes contained in Item XII A. on page 3 to indicate how the waste will be stored, treated, and/or disposed of at the facility,

For non-listed hazardous waste: For each characteristic or toxic contaminant entered in column A, select the code(s) from the list of process codes contained in item XII A, on page 3 to indicate all the processes that will be used to store, treat, and/or dispose of all the non-listed hazardous wastes that possess that characteristic or toxic contaminant.

NOTE: THREE SPACES ARE PROVIDED FOR ENTERING PROCESS CODES, IF MORE ARE NEEDED:

- 1. Enter the first two as described above.
- Enter "000" In the extreme right box of Item XIV-D(1).
- 3. Enter in the space provided on page 7, Item XIV-E, the line number and the additional code(s).
- 2. PROCESS DESCRIPTION: If a code is not listed for a process that will be used, describe the process in the space provided on the form (D.(2)).

NOTE: HAZARDOUS WASTES DESCRIBED BY MORE THAN ONE EPA HAZARDOUS WASTE NUMBER - Hazardous wastes that can be described by more than one EPA Hazardous Waste Number shall be described on the form as follows:

- Select one of the EPA Hazardous Waste Numbers and enter it in column A. On the same line complete columns B, C and D by estimating the total annual quantity of the waste and describing all the processes to be used to treat, store, and/or dispose of the waste.
- In column A of the next line enter the other EPA Hazardous Waste Number that can be used to describe the waste.
 In column D(2) on that line enter "Included with above" and make no other entries on that line.
- 3. Repeat step 2 for each EPA Hazardous Waste Number that can be used to describe the hazardous waste.

EXAMPLE FOR COMPLETING ITEM XIV (shown in line numbers X-1, X-2, X-3, and X-4 below) - A facility will treat and dispose of an estimated 900 pounds per year of chrome shavings from leather tanning and finishing operation. In addition, the facility will treat and dispose of three non-listed wastes. Two wastes are corrosive only and there will be an estimated 200 pounds per year of each waste. The other waste is corrosive and ignitable and there will be an estimated 100 pounds per year of that waste. Treatment will be in an incinerator and disposal will be in a landfill.

			Т			-	PA			8. ESTIMATED	1													D.	PR	OCESS
Nu	Jn m	_				ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1	i) F	PRO	OCI	ES	is (50	DE	S	Œn	ter	ÇO	de)		(2) PROCESS DESCRIPTION (If a code is not entered in D(1))				
X	Ī	1	Ť	K		,	5	١	4	900	P	T	T	0	3	1	۵	Ī	8	Ī	0		Ī			
X	Ì	2	T	D	(7	0		2	400	ρ	7	1	0	3	1	D	1	8	Ī	0		T			
X	Ī	3	T	Ó	1	,	0		1	100	P	T	1	0	3	1	۵	١	8	Ī	0					
×	1	4	1	Ď	1	,	0		2				1			1		ł		1			Ī		Ī	Included With Above

Secondary ID Number (Enter from page 1)

IL000608471

XIV. Description of Hazardous Wastes (Continued)

	1		4. E			8.	. ESTIMATED	C. UNIT OF						_			D. F	PRO	CES	SES		
Line Numbe		W	AZ/ IST	EN	D.	a	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1)	PR	OC	 :ss	co	DE:	S (En	ter c	ode	•)		(2) PROCESS (If a code is not		
1		Dί	o l	0	l		15,000	Ţ	S	0	l	F	slo)	2	T	0	1 4		ABCEFGH	TOLA	Х99АВ
1	2	וְם	0	0	2		5,000	τ	S	0	1		si)	2	T	0	1	4	ABCEFGH	TOIA	X99AB
	3	ם	0	0	3		5,000	T	S	0	1	floor	s	0	2	T	0		4	ABCEFGH	TOLA	X99AB
4	•	ם	0	0	4		5,000	Ţ	S	0		\prod	S	0	2	T	0		4	ABCDEFGH	TOLA	X99AB
!	5	D	0	0	5		250	T	S	0	1	Ī	S	0	2	T	0		4	ABCDEFGH	TOLA	X99AB
	6	D	0	0	1	,	250	T	S	0		ı	S	0	2	T	0		4	ABCDEFGH	TOLA	X99A _B
	7	D	0	0	,	,	250	τ	S	O		1	S	0	2	T	0	Ī	4	ABCDEFGH	TOLA	X99AB
i	8	D	0	0	1 8	3	250	Ţ	S	C	1	1	S	0	2	T	C) [4	ABCDEFGH	TOLA	X99AB
i	9	D	0	0	1 9	,	250	T	S	0)	1	S	0	2	T	7)	4	ABCDEFGH	TOLA	X99AB
1	0	D	0	1	1	0	250	T	S	1)	1	S	0	2	I	1	2	4	ABCDEFGH	TOLA	X99AB
1	1	D	0	1		1	250	τ	S	1	7	1	S	0	2	T	1	<u> </u>	4	ABCDEFGH	TOLA	X99AB
1	2		0	1	T	2	250	T	S	1	2	1	s	0	2	I	1	0	4	ABCEFGH		X99AB
1	3	D	_	1	_	3	250	T	S	1	5	ī	S	0	2	T	1	0	4	ABCEFGH		X99AB
1	4	D	0	1	1	4	250	T	s		0	1	S	0	2	T	1	0	4	ABCEFGH		X99AB
1	5		0	T,		5	250	т	s		0	1	S	0	2	I	1	0	4	ABCEFGH	-	X99AB
1	6	D	_	1	-	6	250	T	5	:	0	1	S	0	2	1		0	4	ABCEFGH		X99AB
1	7	D	0			7	250	r	5	;	0	1	s	0	2	1		0	4	ABCEFGH		X99AB
1	8	-	0			8	15,000	T	1	3	0	1	s	0	2	1		0	4	ABCEFGH	TÕlA	Х99АВ
1	9	D	io		il	9	15,000	Т	1	5	0	1	S	10	2	7	:	0	4	ABCEFGH	TÖLA	X99AB
2	0	n	10		2	0	15,000	r	1	S	0	1	S	0	2	1		0	4	ABCEFGH	_	X99AB
2	1	۵	7	+	2	ĭ	15,000	T	1	S	0	1	s	0	2	: 7	r	0	4	ABCEFGH	TOLA	X99AB
2	2	D	0		2	2	15,000	T		s	0	1	S	0	2	: 1	-	0	4	ABCEFGH	TOLA	X99AB
2	3	+	0	-	2	3	15,000	T		s	0	1	S	0	1 2	: :	1	0	4	ABCEFGH	TOLA	X99AB
2	4	D	0	1	2	4	15,000	T	7	s	0	1	5	0	1	2	r	0	4	ABCEFGH	TOLA	
2	5	D	0	1	2	5	15,000	T	7	S	0	1	1	C	7 2	2	F	0	4	ABCEFGH	TOLA	
2	6	E	0	+	2	6	15,000	Ť		s	0	1	3	S) :	2	r	0	4	ABCEFGH	TOLA	
2	7	I	0	+	2	7	15,000	ī	_	s	0	1	1	3 0	, ;	2 1	T	0	4	ABCEFGH	TOLA	X99A
2	8	1	0	1	2	8	15,000	T	7	s	0	1	1	5 0)	2	T	0	4	ABCEFGH	T01A	X99Ag
2	9	+-	0	\rightarrow	2	9	15,000	T		s	0	1	. :	sic	5	2	T	0	4	ABCEFGH	T014	X99A
3	0	+-	b	- +	3	0	15,000	T	1	s	0	1	.	sic	7	2	T	0	4	ABCEFGH	TOLA	X99Aı
3	1	+-) (0	- 	3	1	15,000	T	\dashv	S	0	1		SIG	5	2	Т	0	4	ABCEFGH		X99A
3		+-) (0	-+	3	2	15,000	T	7	S	0	1		SI	0	2	T	0	4	ABCEFGH	T01/	
3		+	<u> </u>	0		3	15,000	T	_	s	0	1	1	SI	0	2	T	0	4	ABCEFGH	T012	X99A

Form Approved. OM8 No. 2050-0034 Expres 10/31/99 GSA No. 0246-EPA-OT

EPA I.D. Number (Enter from page 1)

L D O O O 6 O 8 4 7 1

Secondary ID Number (Enter from page 1)

XIV. Description of Hazardous Wastes (Continued)

	A. EPA	B. ESTIMATED	C. UNIT OF		 -						D. 0	ROC	ESSES		
Line	HAZARD WASTE NO.	ANNUAL QUANTITY OF	MEASURE (Enter	1	, 00										
Number	(Enter code)	WASTE	code)	L") PR		ع دد 		نة (E	nter (code)	(2) PROC (If a code is	ESS DESC.	RIPTION Id in D(1))
1	D O 3 4	15,000	 	s	0	1	<u>-s</u>	io	12	T	0	4	ABCEFGH	TOLA	X99AB
. 2	D 0 3 5	15,000	T	s	0	1	Ş	0	2	T	0	4	ABCEFGH	TOLA	X99AB
3	D 0 3 6	15.000	T	s	0	1	s	0	2	τ	0	4	ABCEFGH	TOLA	ХЭЭАВ
- 4	D 0 3 7	15,000	ī	s	0	1	S	0	2	T	0	4	ABCEFGH	TOLA	X99AB
5	D 0 3 8	15,000	T	s	0	1	S	0	2	T	0	4	ABCEFGH	TOLA	ХЭЭДВ
6	D 0 3 9	15,000	T	S	0	1	S	0	2	T	0	4	ABCEFGH	TOLA	X99AB
7	D 0 4 0	15,000	T	S	0	1	S	0	2	T	0	4	ABCEFGH	TOLA	X99AB
8	D 0 4 1	15,000	T	s	0	1	S	0	2	T	0	4	ABCEFGH	TOIA	X99AB
9	D 0 4 2	15,000	τ	s	0	1	s	0	2	T	0	4	ABCEFGH	TOLA	X99AB
1 0	D 0 4 3	15,000	T	s	0	1	s	0	2	T	0	4	ABCEFGH	TOIA	X99AB
1 1	F O O 1	7,500	T	s	0	1	S	0	2	T	0	4	ABCEFGH	TOLA	X99AB
1 2	F 0 0 3	7,500	T	S	0	1	s	0	2	T	0	4	ABCEFGH	TOLA	X99AB
1 3	F 0 0 4	7,500	T	S	0	1	s	0	2	T	0	4	ABCEFGH	TOIA	X99AB
1 4	F 0 0 5	7,500	τ	S	0	1	S	0	2	T	0	4	ABCEFGH	TOLA	X99A E
1 5	F 0 0 6	1,000	T	S	0	1	S	0	2	T	0	4	ABCDEFGH	TOLA	X99A B
1 6	F 0 0 7	1,000	T	S	0	1	S	0	2	T	0	4	ABCDEFGH	TOLA	X99A B
1 7	F 0 0 8	1,000	T	S	0	1	S	0	2	T	0	4	ABCDEFGH	TOIA	X99A E
1 8	F 0 0 9	1,000	T	s	0	1	S	0	2	T	0	4	ABCDEFGH	TOLA	X99A E
1 9	FO LO	1,000	T	s	0	1	S	0	2	T	0	4	ABCDEFGH	TOLA	X99A E
2 0	F 0 1 1	1,000	τ	s	0	1	s	0	2	T	0	4	ABCDEFGH	TOLA	X99A E
2 1	F 0 1 2	1,000	T	S	0	1	S	0	2	T	0	4	ABCDEFGH	TOLA	X99A E
2 2	F 0 1 9	1,000	T	S	0	1	S	0	2	T	0	4	ABCDEFGH		X99A B
2 3	F 0 2 0	1,000	T	s	0	1	S	0	2	T	0	4	ABEFGH		
2 4	F 0 2 1	1,000	T	s	0	1	s	0	2	T	0	4	ABEFGH	—— <u>—</u>	
2 5	F 0 2 2	1,000	T	S	0	1	S	0	2	T	0	4	ABEFGH		
2 6	F 0 2 3	1,000	T	s	0	ı	s	0	2	T	0	4	ABEFGH		
2 7	F 0 2 4	250	T	s	0	1	s	0	2	T	0	4	ABEFGH	X99B	
2 8	F 0 2 5	15.000	T	s	0	1	s	0	2	T	0	4	ABEFGH	X99B	
2 9	F 0 2 6	1,000	T	s	0	1	s	0	2	T	0	4	ABEFGH		
3 0	F 0 2 7	1,000	T	S	0	1	S	0	2	T	0	4	ABEFGH		
3 1	F 0 2 8	1,000	T	S	0	l	s	0	2	T	0	4	ABEFGH		
3 2	F 0 3 2	250	r	S	0	1	S	0	2	τ	0	4	ABEFGH	X99B	
	F 0 3 4	250	T	s	0	1.	s	0	2	T	0	4	ABCEFGH		Х99АВ

ILD000608471

Secondary ID Number (Enter from page 1)

XIV. Description of Hazardous Wastes (Continued)

				. EI	-		1		ESTIMATED	C. UNIT OF			_						D.	PRO	CES	SES	
Lin Num	-	1	HA NA: Ent		N	0.			ANNUAL JANTITY OF WASTE	MEASURE (Enter code)	(1) Pl	ROC	:ES:	s cc	DES	(E	ter	coc	te)		(2) PROCESS DES (If a code is not enti-	
i	1	F	1	οĺ	3	5	;		250	Ţ	s	l)	1	si	ol	2	1		οİ	4	ABCEFGH	X99A B
j	2	F		ol	3	1	,		250	τ	s	(0	1	s	d	2	I			4	ABCEFGH	Х99АВ
	3	F	1	ol	3	3 8	3		250	Ţ	s	0		1	s	0	2	I		<u> </u>	4	ABCEFGH	X99A B
	4	F		o	7	9	9		15,000	Ţ	S	10	<u> </u>	1	s	0	2	I	<u>: '</u>	0	4	ABCEFGH TO1A	х99АВ
	5	K			(ol :	ı		1.000	T	s	1	0	1	s	0	2	1	:	0	4	ABCEFGH	X99AB
	6	K	:	0	() :	2		1,000	T	S	1	0	1	s	0	:	1	:	0	4	ABCEFGH TO1A	X99AB
	7	1	:	0	. (0	3		1,000	T	S		0	1	s	0	:	2 1	<u> </u>	0	4	ABCEFGH TO1A	х99Ав
	8	į	١)	0		o	4		1,000	T	S		0	1	S	0		2 :	r	0	4	ABCEFGH TO1A	Х99АВ
	9	ı	۲	0		0	5		1,000	T	S		0	1	S	0		2 .	T	0	4	ABCEFGH TO1A	X99AB
1	0	1	۲	0		O	6		1,000	T	S		0	1	S	0		4 '	T	0	4	ABCEFGH TO1A	X99AB
1	1	1	ĸ	0		o	7		1,000	T	5	3	0	1	S	C	P	2	T	0	4	ABCEFGH TO1A	X99AB
1	2		ĸ	0	Γ	o	8		1,000	T	1	<u> </u>	0	ı	S	0)	2	T	0	4	ABCEFGH TOLA	Х99АВ
1	3		K	0		o	9		2,500	T		S	0	1	S	0		4	T	0	4	ABCEFGH	Х99А В
1	4	1	K	0	Γ	1	0		2,500	T	5	3	0	1	S	C)	2	T	0	4	ABCEFGH	X9 9A B
1	5	5	ĸ	0	T	1	1	T	2,500	T	75	3	0	1	S	1)	2	T	0	4	ABCEFGH	X99A B
1	6	5	ĸ	0		1	3		100	T	1	s	0	1	S		0 2	2	T	0	4	ABCEFGH	X99A B
1	1	7	K	0	Ī	ı	4	T	100	T		s	0	1	S		0 2	2	T	0	4	ABCEFGH	X99A B
1	1	8	K	0	1	1	5	T	250	T		S	0	1	5		0 :	2	T	0	4	ABCEFGH	Х99А в
1	i	9	K	0	1	1	6	T	250	r	T	S	0	1	5	31	0	2	T	0	4.	ABCEFGH	X99A B
2	1	0	K	0	1	1	7	T	250	τ	T	S	0	1		3	0	2	T	0	4	ABCEFGH	X99A E
2		1	K	C	١Ī	1	8	T	250	T	T	S	0	1	. :	5	0	2	T	0	4	ABCEFGH	X99A E
2	T	2	K	0	1	1	9		250	T	1	S	0	1	.	S	0	2	T	0	4	ABCEFGH	X99A ¹
2		3	K	(7	2	0	T		T		S	0	1		5	이	2	T	0	4	ABCEFGH	X99A I
2		4	K	(7	2	1		250	T	T	S	0	1		S	0	2	T	0	4	ABCEFGH	X9 9A
2		5	K	1	0	2	2	2	250	T		S	0			s	0	2	T	0	4	ABCEFGH	X9 9A
2	:	6	K	1	5	2	3	3	2,500	T	\neg	S	0		ı	s	0	2	T	0	4	ABCEFGH	X99A
2	:	7	K	1	5	2	4	•	2,500	T	\dashv	S	0	1	1	S	0	2	T	0	4	ABCEFGH	X99A
7	2	8	K	1	0	2	2	5	250	T	\neg	S	0		1	s	0	2	Τ	0	4	ABCEFGH	X99A
7	1	9	K	+	ol	_	. 6	5	250	T		s	C	5	1	s	0	2	T	0	4	ABCEFGH	X99A
	3	0	K	1	0	2	7	7	250	T		S	0	ī	1	sl	o	2	Τ	0	4	ABCEFGH	X99A
	3	1	K	1	이	2	2 8	в	250	T		S	(0	1	s	O	2	T	0	4	ABCEFGH	X99A
	3	2	K	┿	0	_	+-	9	100	T		S	1	5	ī	s	0	2	I	0	4	ABCEFGH	X99A
┝	3	7	K		ol		+-	0	100	T		S	1 (01	1	SI	o	2	T	0) 4	ABCEFGH	X99A

Secondary ID Number (Enter from page 1)

ILD000608471

XIV. C	Jes cubtion	of	Hazzrgous	Wastes (C	Continued)
--------	------------------------	----	-----------	-----------	------------

			. EF			B	. ESTIMATED	C. UNIT OF									0.	PRC	CES	SES		
Une Number	1	WA;	STE OF C	N) .	C	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1)	PR	oc	ESS	COL)ES	(E	7 10 /	coc	le)		(2) PROCES (If a code is r		
1	K	i () (3	1		100	٢	s i	0	i	Ī	SI	oi	_2	1		01	4	ABCEFGH		X99A B
. 2	K	i	0	3	2		100	T	s	0		1	sl	d	2	T			<u>. </u>	ABCEFGH		X99A B
; 3	K		0	3	3		100	Ţ	S	0		1	s	0	2	1	: 10	<u>, </u>	4	ABCEFGH		X99A B
14	K		0	3	4		100	τ	S	0		1	s	0	2	1		0	4	ABCEFGH		X99A B
1 5	K	: }	0	3	5		100	Ť	S	0	1	ı	s	0	2	1		0	4	ABCEFGH		X99A B
6	K		0	3	6		2,500	t	S	o		ı	s	0	:	2 7	12	0	4	ABCEFGH		X99A B
7	K	:	0	3	7	I	100	T	S	0	1	1	s	0		2 2	r	0	4	ABCEFGH		X99A B
i 8	K	: [0 (3	18	T	100	τ	S	l		1	S	0		2 :	T	0	4	ABCEFGH		X99A B
9	K		0	3	19		100	T	S	0) [1	S	0	1	2 '	T	0	4	ABCEFGH		X99A B
1 0	ŀ		0	4	0	\int	100	T	S	() [1	51	0	1	4	T	0	4	ABCEFGH		X99A B
1 1	l		0	4	1	T	100	T	5	1.0	0	1	S	C)	2	T	0	4	ABCEFGR		X99A B
1 2	. [0	4	. 2	T	2,500	T	S		0	1	S	()	4	T	0	4	ABCEFGH		Х99А В
1 3	1		0	- 4	. 3	T	2,500	T	S		0	1	S	(q	4	T	0	4	ABCEFGH		X99A B
1 4	. 1	K	0	4	. 4	T	2,500	T	S	1	5	1	S	0)	2	T	0	4	ABCEFGH		X99A B
1 5	1	K	0	4	ء ا	1	2,500	:	S	1	0	1	S	()	2	T	0	4	ABCEFGH		Х99А в
1 6	,	K	0	4	4/6	1	2,500	Ī	S	T	0	ī	S	(2		T	0	4	ABCEFGH	TOLA	Х99А В
1 7	7	K	0	,	4/7	7	2,500	T	S	1	0	1	S	(0 2	:	T	0	4	ABCEFGH		X99A B
1 8	3	ĸ	0	1	4 8	3	2,500	T	S		0	1	S		0 2	2	T	0	4	ABCEFGH	TOLA	X99A B
1 ! 9	9	K	0	1	4 9	,	2,500	I	9	5	0	1	S		0) :	2	T	0	4	ABCEFGH		X99A B
2 (0	0	K	0	1	5 0	,	2,500	T	9	3	0	1	S		0 :	2	T	0	4	ABCEFGH		X99Ā B
2	1	K	0		5 3	Π	2,500	I	5	S	0	1	S		0	2	T	0	4	ABCEFGH		X99A B
2 :	2	K	0		5 2	2	2,500	T		S	0	1	S		0	2	T	0	4	ABCEFGH	TOLA	X99A B
2	3	K	0		6 0	0	250	T	1	S	0	1	S		0	2	T	0	4	ABCEFGH	TOLA	X99A B
2	4	K	0		6	ı	250	T		S	0	ì	S		o	2	T	0	4	ABCEFGH	TO 1A	
2	5	K	0		6	2	250	Ť		s	0	1	S		0	2	T	0	4	ļ		X99A B
2	6	K	0	Ī	6	9	250	r		s	0	1	5	1	o	2	T	0	4	ABCEFGH	TOLA	Х99А в
2	7	K	0	T	7	1	250	T		S	0	1	5	1	0	2	T	0	4	ABCEFGH		X9 9A B
2	8	K	0	T	7	3	100	T		s	0		1 5	sl.	ol	2	T	0	4			X99A B
2	9	K	0	1	8	3	250	T		s	0		1 9	sl	o	2	τ	0	4	ABCEFGH		X99A B
3	0	K	0	1	8	4	250	r		s	0		1 :	sl	o	2	T	0	4	ABCEFGH		Х99А в
3	1	K	0	T	8	5	250	r		S	0		1 :	sĺ	0	2	T	0	4	ABCEFGH		X99A B
3	2	K	0	1	8	6	250	r		S	0	Ī	1 :	SĮ	0	2	T	0	4	ABCEFGH	TOLA	X99A B
3 1	3	K	0	Ī	8	7	250	ī		S	0	Ī	1	SI	0	2	I	0	1 4	ABCEFGH	TOLA	X99A B

Secondary ID Number (Enter from page 1)

ILD000608471

	A. EPA	B. ESTIMATED	C. UNIT OF									 D. PF	204		SES	
Line lumper	HAZARD WASTE NO.	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1)	PR	 OCE	ESS	COD	ES (Ent			_		(2) PROCESS DE	1
1	Kin B B	250	Ţ	s	0	lı	+	5 İ	ol	2	T	ol			BCEFGH	Х99А В
2	KI OL 9 O	250	τ	s	_0	1	1	si	d	2	T	0	4		ABCEFGH	Х99АВ
3	K 0 9 1	250	τ	s	0	1		5	0	2	T	0	4	\prod_{i}	ABCEFGH	X99AB
. 4	K 0 9 3	250	T	S	0	$\prod_{\mathbf{i}}$		s	ol	2	T	0	4		abcefgh	X99AB
5	KIO 94	250	T	s	0	$\overline{\prod}$	ı	sl	ol	2	T	0	1		ABCEFGH	Х99А В
6	K 0 9 5	250	ī	s	0		1	5	0	2	T	0		4	ABCEFGH	X99A B
7	K 0 9 6	250	T	s	0		1	sl	0	2	T	0	1	4	ABCEFGH	X99A B
8	K 0 9 7	250	Ţ	S	10	$\sqrt{1}$	1	s	0	2	T	0		4	ABCEFGH	Х99АВ
j 9	K 0 9 8	100	ī	S	10	丌	1	si	0	2	T	0	1	4	Abcefgh	Х99АВ
1 0	K 0 9 9	100	T	S	0)	1	S	0	2	T	0		4	abcefgh	хээлв
1 1	K 1 0 0	250	T	s	1.0	2	1	S	0	2	T	0	1	4	ABCEFGH TOLA	X99AB
1 2	K 1 0 1	250	T	S	1	0	1	S	0	2	T	0		4	ABCEFGH	ХЭЭАВ
1 3	K 1 0 2	250	Ţ	S		0	1	S	q	- 7	I	C	P]	4	ABCEFGH	X99 AB
1 4	K 1 0 3	250	Ī	S	T	0	1	5	0	2	T	0		4	ABCEFGH	Х99АВ
1 5	K 1 0 4	250	Ī	S	1	0	1	S	0	2	T	0		4	ABCEFGH	Х99Ав
1 8	K 1 0	100	T	S	1	0	1	S	0	2	T			4	ABCEFGH	X9 9AB
1 7	K 1 0 6	250	Ī	S	1	0	1	S	0	2	T)	4	ABCEFGH	X99AB
1 8	K I O	15,000	T	15	1	0	1	S	0	2	1	: (ונ	4	ABCEFGH	X99AB
1 9	K 1 0	15,000	Ī	15	i	0	L	S	0	2	1	<u>. (</u>	0	4	ABCEFGH	X99A ^B
2 0	K 1 0	15,000	ī	1	5	01	1	S	0	2	7	12	0	4	ABCEFGH	X99AE
2	K 1 1	15,000	T	1	S	0	L	S	0	2		r	0	4	ABCEFGH	APPA I
2	2 K 1 1	250	ī		s l	0	1	S	C	2		r	0	4	ABCEFGH	X99 A ¹
2	3 K 1 1	2 250	T		S	0	1	S	(2		T	0	4	ABCEFGH	X99 A1
2	4 K 1 1	3 250	T		S	0	1	S	(2	2	T	0	4	ABCEFGH	X9 9A
2	5 K 1 1	4 250	T	丁	s	0	1	S	1	2	2	T	0	4	ABCEFGH	X99A
	6 K 1 1	5 250	T	1	s	0	1	S		7	2	T	0	4	ABCEFGH	X99A
2	7 K 1 1	6 250	T	1	S	0	1	S		0 :	2	T	0	4	ABCEFGH	X99A
2	╍┠╌┊╍╞╍ ╪	7 250	T	7	s	0	1	S		0	2	Τ	0	4	ABCEFGH	X99A
 }	9 6 1 1	g 250	T	7	S	0	1	5	3	ol :	2	T	0	4	ABCEFGH	X99A
	0 K 1 2		T	\dashv	S	0	1	1	3	ol :	2	T	0	4	ABCEFGH	X99A
3	1 K 1 2		T	一	s	0	1	1	5	0	2	T	0	4	ABCEFGH	X99A
3	2 K 1 2		Ī	7	S	0	1	1	S	o	2	T	0	1 4	ABCEFGH	X99A
3				\dashv	S	0	1		si	이	2	T	0	1 4	ABCEFGH	X99A

Secondary ID Number (Enter from page 1)

110000608471

XIV. Description of	Hazardous Wastes	(Continued)
---------------------	------------------	-------------

			EP	_	j	8.	ESTIMATED	C. UNIT OF									D.	PRO	CE	SES	
Line Number		HA NAS Ent	TE	NC		a	ANNUAL UANTITY OF WASTE	MEASURE (Enter code)	(1) PF	200	ESS	CO	ŒS	(En	ter	cod	•)		(2) PROCESS D (If a code is not e	
: 1	l	Κ Ι 1		3	1	1	5,000	Ţ	s	0	i	ı	sl	oi	1.3	I		o İ	4	ABCEFGH	Х99А В
2	1	ci 1		3	2	1	5.000	Ť	S	1	1	1	s	d	2	T	0		4	ABCEFGH	Х99А В
3	1	KI 1		3	6		250	Ţ	s	0		1	s	ol	2	T	C		4	ABCEFGH	X99 A B
4		K I		4	1		250	T	s	10	1	1	s	0	2	T	1	<u>) </u>	4	ABCEFGH	X99 A B
¦ 5		K :	L	4	2		250	T	S	10		1	s	ol	2	T		0	4	ABCEFGH	X99A B
6		K I		4	3		250	T	S	1	o l	1	s	ol	2	T	1	0	4	ABCEFGH	X99 A B
7		K	ı	4	4		250	T	S	1	o	1	S	0	7	I		0	4	ABCEFGH	X99A B
8	T	κ	ı	4	5		250	T	S		οl	1	sl	0	7	1		0	4	ABCEFGH	X99A B
9	T	ĸ	1	4	17		250	T	S		0	ı	S	0		2 1	:	0	4	ABCEFGH	X99A B
1 0	T	K	1	4	18	T	250	T	S		0	1	s	0		3 7		0	4	ABCEFGH	X99A B
1 1	1	K	1	4	9	T	250	Ī	1	; ·	0	1	S	0		2 :	:	0	4	ABCEFGH	Х99А в
1 2	T	K	1	5	lo	\dagger	250	r	1	5	0	1	S	0		2 '	[]	0	4	ABCEFGH	Х99А в
1 3	T	K			1	Ť	250	Ī	1	5	0	1	S	0		4	T	0	4	ABCEFGH	X99AB
1 4	┱	P	_		1	T	100	T	19	;	0	1	S	0		2 7	[0	4	ABCEFGH	X99A B
1 5	+	P		_	2	Ť	100	r	15	5	0	1	S	0	1	2	r	0	4	ABCEFGH	X99A B
1 6	1	P		_	3	\dagger	100	r	1	s l	0	ı	S	Q	2		T	0	4	ABCEFGH	X99A E
1 7	,	P	0	_	4	+	100	T		s i	0	1	S	0) 2		T	0	4	ABCEFGH	X99A E
1 8		P		-	5	†	100	ī	1	s l	0	1	s	1	2	:	T	0	4	ABCEFGH	X99A p
1 9	,	P		(16	7	250	ī	\top	s i	0	1	S	(0 2	2	T	0	4	ABCEFGH	X99A1
2 0	,	P	_		7	†	100	ī	十	S	0	l	S	(0] :	2	T	0	4	ABCEFGH	X99A
2 1	,	P		T	8	†	250	T	十	s	0	1	S		0 :	2	T	0	4	ABCEFGH	X99A
- 	2	P	_	t	9	7	250	ī	7	s	0	1	5	1	0	2	T	0	4	ABCEFGH	X99A
	3	P		T	0	\neg	250	ī	7	S	0	1	. 5	<u>; </u>	o	2	T	0	4	ABCEFGH	X99A
	4	P		+	1	⇁	250	T	\dashv	s	0	1	. 3	3	이	2	T	0	4	ABCEFGH	X99A
-+	5	P	_	1	2	-	250	T	寸	S	0		1	3	o	2	T	0	4	ABCEFGH	X99A
- -	6	P	<u> </u>	1	<u> </u>	-	250	T	+	s	0	+-	+	-	+	2	T	0	4	ABCEFGH	X99A
	7	P	_	 - 	4		250	ī	1	S	0	+	+-		0	2	T	0	4	ABCEFGH	X99A
	8	P	-	+	. <u> </u>		250	T	_	s	0			si	0	2	T	0	1 4	ABCEFGH	X99A
	9	P	├—	1 .	1 6	\neg	250	T	\dashv	<u>-</u> s		+	-	s	_	2	T	╁╌	+-	ABCEFGH	X99A
	<u>,</u>	P	├ ─	+	1 7	-	250	T	_	S	÷	+-		s	0		T	┼	+-	ABCEFGH	X99A
	1	P	-	+	1 8	_	250	T		S	÷	┿		si	o	_	T	+-	 -	ABCEFGH	X99A
	2	┼─	10	-	2 (_	250	T		s	-	+-		SI	0		τ	4-		4 ABCEFGH	X99A
3		 -	10	÷	2 1	<u> </u>	250	ī		S	<u> </u>	-		si	_	2	T	+	, 	ABCEFGH	X99A

Secondary ID Number (Enter from page 1)

ILD000608471

i	A. EPA	B. ESTIN	MATER	C. UNIT OF				-					ppi	OCE	SES	
Line lumber	HAZARD WASTE NO. (Enter code)	ANNU QUANTI WAS	JAL TY OF	MEASURE (Enter code)	(1)	PR	oca	ESS	COD	ES (I	Ente			JCE	(2) PROCESS D	
1	P10 2 2	2.	50	T	s I	0	li	1	si	0	2 '	<u> </u>	οĺ	4	ABCEFGH	X99AB
2	P 0 2 3	2.	50	T	S	0		1	s	d	2 1		0	4	ABCEFGH	X99AB
3	P 0 2 4	2	50	ī	s	0	l		s	ol	2 7	2	0	4	ABCEFGH	X99AB
4	P 0 2 6	2	50	T	s	0	1		s	ol	2	r	0	4	ABCEFGH	х99АВ
5	P 0 2 3	7 2	.50	T	s	0	1	ı	s	ol	2 '	T	0	4	ABCEFGH	X99AB
6	P 0 2 1	3 2	50	T	S	0		ı	S	o	2	T	0	4	ABCEFGH	X99AB
7	P 0 2	9 1	.00	T	S	0		1	s	0	2	T	0	4	ABCEFGH	X99AB
: 8	P 0 3	0 1	00	Ţ	s	0		1	s	0	2	T	0	4	ABCEFGH	X99AB
i 9	P 0 3	1 1	100	ī	S	0	T	ı	S	0	2	T	0	4	ABCEFGH	X99AB
1 0	P 0 3	3	100	r	s	C)	1	S	0	2	T	0	4	ABCEFGH	X99AB
1 1	P 0 3	4	250	Ţ	s	. 0)	1	S	0	2	T	0	4	ABCEFGH	X99AE
1 2	P 0 3	6	100	Ţ	S	1)	1	S	0	4	T	0	4	ABCEFGH	X99AE
1 3	P 0 3	7	100	Ţ	S	1	0	1	S	q	4	T	0	4	ABCEFGH	X99A
1 4	P 0 3	8	100	T	s	()	ŀ	S	0	2	T	0	4	ABCEFGH	X99A ₁
1 5	P 0 3	9	250	T	S	1)	1	S	0	2	T	0	4	ABCEFGH	X99A ₁
1 6	P 0 4	0	250	r	S		0	1	s	0	2	T	0	4	ABCEFGH	X99 A
1 7	P 0 4	1	250	T	S		0	1	S	0	2	T	0	4	ABCEFGH	X99A
1 8	P 0 4	2	250	T	s		0	1	s	0	2	T	0	4	ABCEFGH	X99A
1 9	P 0 4	3	100	ľ	S	-	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2 0	P 0 4	4	250	T	s		0	1	S	0	2	T	0	4	ABCEFGH	X99A
2 1	P 0 4	5	250	T	S		0	1	S	0	2	T	0	4	ABCEFGH	X99A
2 2	P 0 4	6	250	T	S		0	1	S	0	2	T	0	4	ABCEFGH	X99A
2 3	P 0 4	7	250	T	5	3	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2 4	P 0 4	8	250	T	1	3	0	1	S	0	2	T	0	4	ABCEFGH	X9 9A
2 5	P 0 4	9	100	T	1	3	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2 6	P 0 5	0	100	T	7	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2 7	P 0 5	1	100	T	1	5	0	1	S	0	2	T	0	4	ABCEFGH	X9 9A
2 8	B P 0 5	4	100	T	1	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
2 9	9 P O 5	6	250	T		s	0	1	S	C	2	T	C	4	ABCEFGH	X99A
3 0	0 P 0 5	7	100	T		s	0	1	s	C	2	ī) (ABCEFGH	X99A
3	1 PO 5	8	100	T	\top	S	0	1	s	(2	1	: 0) (ABCEFGH	X99A
3 3		9	100	Ī	\top	S	0	1	S	(2	1	: () (ABCEFGH	X994
3		0	250	T	\dashv	s	0	1	s	1 () 2	1		51 4	ABCEFGH	X99/

Secondary IO Number (Enter from page 1)

ILD000608471

	Į.	A. E			8.	. ESTIMATED	C. UNIT OF									D. 1	PRO	CES	SES		_
Line Number	W	ASTI ASTI	E NC		a	ANNUAL DUANTITY OF WASTE	MEASURE (Enter code)	(1)	PR	oc	ESS	coc	ES	(Er	ter (:000	,		(2) PROCESS DE)
1	p i	01	6	2		250	ī	s	0		ıF	si	οĺ	13	T	0	1	4	ABCEFGH	X99A	В
2	P	0	6	3	\prod_{-}	250	Ţ	s	0	Ĺ	1	si	d	2	T	0	1 4		ABCEFGH	X99A	В
i 3	P	0	6	4		250	Ţ	s	0		1	s	ol	2	T	0	1	4	ABCEFGH	X99A	В
4	P	ol	6	5		250	Ţ	s	0		\prod	s	ol	2	T	0	1	4	ABCEFGH	X99A	В
. 5	P	0	6	6		250	τ	s	0		1	sl	0	2	T	0		4	ABCEFGH	X99A	В
6	P	0	6	7	T	100	T	s	0	$\sqrt{1}$	1	s	ol	2	T	C		4	ABCEFGH	X99 A	1
7	P	0	6	8	T	100	T	s	0	ıΤ	1	s	ol	2	T	0		4	ABCEFGH	X99 A	В
8	P	0	6	9	T	100	Ī	s	1	<u>) (</u>	1	sl	0	•	T	1)	4	ABCEFGH	X99A	В
9	P	ĺσ	7	0	, [100	T	s	1 0	o	1	s	0		T		0	4	ABCEFGH	X99A	В
1 0	P	0	7	1	T	100	ī	S	1	0	1	S	0		2 I		0	4	ABCEFGH	X99A	В
1 1	P	0	7	1	2	250	ī	S	1.	0	1	S	0		2 1		0	4	ABCEFGH	X99 Ã	В
1 2	P	0	7	1:	3	100	T	S		0	l.	S	0		2 1		0	4	ABCEFGH	X99A	В
1 3	P	0	7	1	4	100	T	S		0	l	S	0		4 :	C	0	4	ABCEFGH	X99 A	B
1 4	P	0	7	1	5	100	T	S	1	0	ı	S	0		2 1	: 1	0	4	ABCEFGH	X99A	В
1 5	P	0	7	1	6	250	T.	S		0	l,	S	0		2 1		0	4	ABCEFGH	X99A	В
1 6	P	0		,	,	250	r	s		0	1	s	0	2		r	0	4	ABCEFGH	X9 9/	B
1 7	P	0		,	8	250	Ī	Ts	;	0	1	S	С	2	•	r	0	4	ABCEFGH	X99/	B
1 8	P	10	ī		1	250	T	5	s	0	1	S	C) 2		r	0	4	ABCEFGH	X99/	A B
1 ! 9	P	10	i	1	2	100	ī	19	5	0	1	S	() 2	2	T	0	4	ABCEFGH	X99	Ав
2 0	P	10	1	3	4	100	T	7 :	5	0	1	S	() :	2	T	0	4	ABCEFGH	X99	A E
2 1	ı P	10		3	5	250	T	1	5	0	1	s	() :	2	T	0	4	ABCEFGH	X99.	A B
2 2	2 P	To		В	7	250	T	1	s	0	1	S	1)	2	T	0	4	ABCEFGH	X99	A E
2 :	3 P	10		8	8	250	T		s	0	1	S	1	0	2	T	0	4	ABCEFGH	X9 9	A E
2	4 P	0		8	9	250	T	1	s	0	1	S	1	0	2	T	0	4	ABCEFGH	X9 9	ÅΕ
2	5 P	1)	9	2	250	T	T	s	0	1	S	1	o	2	T	0	4	ABCEFGH	X9 9	A E
2	6 P		7	9	3	250	T		S	0	1	S		0	2	T	0	4	ABCEFGH	X99	AE
2	7 P	1)	9	4	100	T		S	0] 1	L S	3	o	2	T	0	4	ABCEFGH	X9 9	A
2	8 E	1)	9	5	250	T		S	0		1 5		o	2	Τ	0	4	ABCEFGH	X9 9	A
2	9 F	1	,	9	6	250	T		s	0		1 5	si	ol	2	T	0	4	ABCEFGH	X99	A
3	0 E	, (7	9	7	250	T		S	0	T	1 :	si	0	2	τ	0	4	ABCEFGH	Х99)AI
3	1	, (,	9	8	100	T	一	S	0	T	1 :	5	0	2	T	0	4	ABCEFGH	X99)AI
 	2	÷	÷	9		100	T	\dashv	S	0	Ī	1 :	sį	0	2	T	0	4	ABCEFGH	X99)Ai
 	3 E	- 		01		250	T	_	s	0	1	1	SI	ol	2	T	0	4	ABCEFGH	X99	9A[

ILD000608471

Secondary ID Number (Enter from page 1)

	A. EPA HAZARD	8. ESTIMATED	G. UNIT OF MEASURE						_			0. Pl	₹0C	ESSES	
Une Yumper	WASTE NO.	QUANTITY OF	(Enter	(1) P	RO	CES	is co	DES	(Er	ter c	0 0(4)		(2) PROCESS (If a code is not	DESCRIPTION entered in D(1)
	PILIO	2 150	Ī	s	1	0	1	SI	ol	_ 2	T	01	4	ABCEFGH	ХЭЭАВ
: 2	Pio	3 100	:	s	1	0	1	s	a	2	T	0	4	ABCEFGH	X99AB
3	PIO	4 100	T	s	10	<u> </u>	1	s	0	2	T	0	4	ABCEFGH	Х99АВ
4	P 1 0	5 100	Ţ	s	10	<u>o </u>	1	s	0	2	T	0	4	ABCEFGH	X99AB
5	P 1 0	6 100	ī	s	1	0	1	s	0	2	T	0	4	ABCEFGH	X99AB
6	P 1 0	8 100	T	S		0	1	s	0	2	T	0	4	ABCEFGH	X99AE
7	P 1 0	9 100	Ţ	S		0	1	S	0	2	T	0	4	ABCEFGH	X99AF
8	P 1 1 1	0 250	T	S	1	0	1	S	0	2	T	0	4	ABCEFGH	X99AB
9	P 1 1 1	1 250	τ	s		0	1	S	0	2	I	0	4	ABCEFGH	X99AE
0	P 1 1	2 250	T	s	1	0	1	S	0	2	T	0	4	ABCEFGH	X99AF
1	P 1 1	3 250	T	S	1	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	P 1 1	4 250	Ī	S	<u> </u>	0	1	S	0	2	T	0	4	ABCEFGH	X99A
3	P 1 1	5 250	T	5	5	0	1	S	q	2	I	0	4	ABCEFGH	X99A
4	P 1 1	6 250	r	S	1	0	l	S	0	2	T	0	4	ABCEFGH	X99A
\$	P 1 1	8 250	Ţ	S		0	l	S	0	2	T	0	4	ABCEFGH	X99A
6	P 1 1	9 100	Ī	S	;	0	1	S	0	2	T	0	4	ABCEFGH	X99A
7	P 1 2	0 250	T	S	1	0	į	S	0	2	Т	0	4	ABCEFGH	X99A
8	P 1 2	1 250	Ţ	5	;	0	1	S	0	2	T	0	4	ABCEFGH	X99A
! 9	PI 11 2	2 250	T	5	3	0	ı	SI	0	2	T	0	4	ABCEFGH	X99A
10	P 1 2	3 250	T	5	5	0	1	S	0	2	τ	0	4	ABCEFGH	X99A
1	U O O	1 250	T	5	5	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1 2	000	2 250	T		3	0	1	S	0	2	T	0	4	ABCEFGH	X99A
3	000	3 250	Ť	5	<u> </u>	0	l	S	0	2	T	0	4	ABCEFGH	X99A
4	U 0 0	4 250	T	[5	3	0	1	S	0	2	T	0	4	ABCEFGH	X99A
5	UOO	5 250	Ţ	[3	0	1	S	0	2	T	0	4	ABCEFGH	X99A
6	000	6 100	T	ا	3	0	l	S	0	2	T	0	4	ABCEFGH	X99A
7	000	7 250	T	[5	3	0	1	S	0	2	T	0	4	ABCEFGH	X99A
8	0 0 0	8 250	T		3	0	1	S	0	2	T	0	4	ABCEFGH	X99A
9	000	9 250	T] 5	3	0	l	s	0	2	T	0	4	ABCEFGH	X99A
0	uloli	0 250	T] 9	3	0	1	s	0	2	Τ	0	4	ABCEFGH	X99A
1	0 0 1	1 250	T		3	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1 2		2 250	T	[5	5	0	1	S	0	2	T	0	4	ABCEFGH	X99A
3	0 0 1	250	T	1	3	0	1	Si	0	2	T	0	4	ABCEFGH	X99A

EPA Form 6700-23 (Rev. 10/01/96) STF ENVS60F 6 -61 of 7-

Secondary ID Number (Enter from page 1)

 	_		_								
-	•	_		$\overline{}$	0	4	_	0		-	
-	-	7	V	U	Ų	0	U	٥	4	4	

XIV. Description of Hazardous Wastes (Continued)

	A. EPA	OUS WESTER (CONT B. ESTIMATED	C. UNIT OF		_				_	_	0	. PR	DCE	SSES	
Line Number	HAZARD WASTE NO.	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1)	PRO	OCE	SS	cop	ES (Enti	_			(2) PROCESS DE (If a code is not en	
1	UI 011 5	250	Ţ	SI	0 !	l	-	s c	01	2	T	ol	4	ABCEFGH	X99A B
2	ui 0 1 6	250	T	s	0	1		s	d	2	r	0	4	ABCEFGH	X99A B
3	U 0 1 7	100	τ	s	0	1		3	ol	2	T	0	4	ABCEFGH	X99A B
i 4	U 0 1 8	250	Ţ	s	0	ı		s	ol	2	T	0	4	ABCEFGH	X99AB
5	טן 0 1 9	250	ī	S	0	1		s	ol	2	T	0	4	ABCEFGH	X99AB
6	u 0 2 0	100	Ţ	S	0	1		s	ol	2	T	0	4	ABCEFGH	X99AB
7	U 0 2 1	250	T	s	0	1	ıŢ	s	ol	2	T	0	4	ABCEFGH	X99AB
: 8	UI 0 2 2	250	Ţ	s	0		ıΤ	S	ol	2	T	0	4	ABCEFGH	X99AB
. 9	UI 0 2 3	250	Ţ	s	0	1	1	s	0	2	T	0	4	ABCEFGH	X99A _B
1 0	U 0 2 4	250	Ī	S	0	1	1	S	0	2	T	0	4	ABCEFGH	X99AB
1 1	U 0 2 5	250	ī	s	1.0)	1	S	0	2	T	0	4	ABCEFGH	X99A _B
1 2	U 0 2 6	250	ī	s	10		1	S	Ō	2	T	0	4	ABCEFGH	X99A B
1 3	U 0 2 7	250	T	S	()	1	S	q	2	T	0	4	ABCEFGH	Х99А в
1 4	U 0 2 8	250	T	S	0		1	S	0	2	T	0	4	ABCEFGH	X99A B
1 5	U 0 2 9	250	ī	S	Ċ	7	1	S	0	2	Ī	0	4	ABCEFGH	Х99А в
1 6	U 0 3 0	250	T	s	1	5	1	s	0	2	τ	0	4	ABCEFGH	X9 9AB
1 7	U 0 3 1	250	T	s	1	o	1	s	0	2	I	0	4	ABCEFGH	X99AB
1 8	- 	2 250	T	s	;	0	1	S	0	2	T	0	4	ABCEFGH	X99AB
1 ! 9	UI 0 3 :	3 250	T	9	;	0	1	S	0	2	T	0	1 4	ABCEFGH	X99A B
2 0	0 3 4	4 250	r	1	5	0	1	S	0	2	T	0	1 4	ABCEFGH	Х99А в
2 1	U 0 3	5 250	Ť	1	3	0	1	S	0	2	I	0	1	ABCEFGH	Х99А в
2 2		6 250	T	1	3	0	1	S	C	2	I	C	4	ABCEFGH	X99A B
2 :	- - - - - - - - 	7 250	T	1	S	0	1	S	C	2	1	1	1	ABCEFGH	Х99АВ
		8 250	T	1	S	0	1	S		2	1	: (14	ABCEFGH	X9 9AB
 	╼╂╼╼┾╼╼┾╼╾┿╾	9 250	T		S	0	1	S	(2	1	: 1		4 -ABCEFGH	X99AB
		1 250	Ī	+	s	0	1	S	(2	1	: ()	4 ABCEFGH	Х99АВ
		2 250	T	+	s	0	1	·S	(0 2	1	[]	5	4 ABCEFGH	X99AB
	··├─┼─┼	3 250	T	\top	s	0	1	s		0 2	: -	[0	4 ABCEFGH	X99A ^B
 		4 250	T	_	s	0	1	s	÷	0 2	: 1	r	0	4 ABCEFGH	Х99Ав
		5 250	T	_	s	0	ı	S	i l	0 2	<u>:</u> ·	r	0	4 ABCEFGH	Х99Ав
	- 	6 250	T	十	s	0	1	+-	_	0 2	┿	T	0	4 ABCEFGH	Х99АВ
			T	寸	si	0		+	•	0 :		T	0	4 ABCEFGH	Х99АВ
3	101014	7 250 8 250	T	\dashv	s	0	-	+-	-	ol :	2	T	01	4 ABCEFGH	X99AB

Form Accroved QMB No 2050-0034 Expires 19/31/99 TSA No 0248-EPA-OT

EPA I.D. Number (Enter from page 1)

ILD000608471

Secondary ID Number (Enter from page 1)

XIV. Description of Hazzrdous Wastes (Continued)

	A. EPA	B. ESTIMATED	C. UNIT OF). <i>PF</i>	POCE	SSES	
Line Number	WASTE NO. (Enter code)	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1)	PR	roc	ESS	CO	OES	(Em	ter c	0de)		(2) PROCESS D	
1	U 0 4 ! 9	250		si	0	į į	<u>ı</u> †	S١	ol	그	<u>ד</u>	01	4	ABCEFGH	Х99А В
1 2	u 0 5 0	250	Ī	S	0		1	sl	d	2	T	0	4	ABCEFGH	Х99А В
3	U 0 5 1	250	Ĩ	S	0		ı	si	0	2	T	0	4	ABCEFGH	X99A B
4	U 0 5 2	250	Ť	S	0		ı	s	0	2	T	0	4	ABCEFGH	X99A B
į 5	U 0 5 3	250	r	S	0		ı	s	0	2	T	0	4	ABCEFGH	X99A B
6	U 015 5	250	T	S	0		1	s	0	2	T	0	4	ABCEFGH	Х99А В
7	U 0 5 6	250	T	S	0		1	s	0	2	T	0	4	ABCEFGH	Х99А в
1 8	U 0 5 7	250	Ī	s	10	o l	1	S	0	2	T	0	4	ABCEFGH	Х99А В
9	טן 0 5 8	250	ī	s	10	o I	1	S	0	2	I	0	4	ABCEFGH	Х99А в
1 0	ช 0 5 9	100	r	S	1	o	1	S	0	2	T	0	4	ABCEFGH	Х99А В
1 1	U 0 6 0	100	T	S	1.0	0	1	S	0	2	T	0	4	ABCEFGH	Х99А В
1 2	U 0 6 1	100	Ţ	S	1	0	1	S	0	2	T	0	- 4	ABCEFGH	Х99А В
1 3	U 0 6 2	250	T	S	1	0	1	S	a	7	T	0	4	ABCEFGH	X99A B
1 4	U 0 6 3	250	T	S	T	0	1	S	0	2	T	0	4	ABCEFGH	Х99А В
1 5	U 0 6 4	250	Ī	S	1	0	1	S	0	2	T	0	4	ABCEFGH	Х99А в
1 6	u 06 6	250	r	S	T	0	1	S	0	2	T	0	4	ABCEFGH	Х99А В
1 7	U 0 6	7 250	I	s	1	0	1	S	0	2	T	0	4	ABCEFGH	Х99А В
1 8	บ 016 8	250	T	S	1	0	1	S	0	2	T	0	4	ABCEFGH	Х99А В
1 j 9	U 0 6	9 250	T	S	;	0	1	S	0	2	T	0	4	ABCEFGH	X99A B
2 0	U 0 7	0 250	Ī	5	5	0	1	S	0	2	ī	0	4	ABCEFGH	X99A B
2 1	U 0 7	1 250	T	1	3	0	1	s	0	2	7	C	4	ABCEFGH	Х99А в
2 2	U 0 7	2 250	T	1	3	0	1	S	0	2	7	: 0) 4	ABCEFGH	Х99А В
2 3	U 0 7	3 250	T	T	5	0	1	S		2	1) 4	ABCEFGH	X99A B
2 4	U 0 7	4 250	T		S	0	1	S	0) 2	1) 4	ABCEFGH	X99A B
2 5	U 0 7	5 250	T		S	0	1	S		0 2	: 7	: () 4	ABCEFGH	X99Å B
2 6	U 0 7	6 250	T		s	0	1	5		0 2	2	[() 4	ABCEFGH	Х99А в
2 7	U 07	7 250	I		S	0	1	5		0 2	2] ?	. () 4	ABCEFGH	X9 9AB
2 8		8 250	T		s	0	ı		s	0 2	2 7	r	0 4	ABCEFGH	X99AB
2 9	U 0 7	9 250	T		s	0	1		5	0 2	2 .	r	0 (ABCEFGH	X99AB
3 0	0 0 8	0 250	T		s	0	l		3	0 2	2 .	r	0 (ABCEFGH	X99AB
3 1	u 0 8	1 250	T		S	0	1		5	0 :	2	r	0	ABCEFGH	Х99АВ
3 3	2 0 0 8	2 250	τ		S	0			s	0 :	2	T	0	4 ABCEFGH	Х99АВ
3 3	3 U 0 8	3 250	T	T	S	0	1		S	0	2	T	0	4 ABCEFGH	Х99АВ

•

Secondary ID Number (Enter from page 1)

110000608471

XIV. Description of Hazardous Wastes (Continued)

	A	. EP	A	_	LESTIMATED	C. UNIT OF	D. PROCESSES												
une Number		RD NO. ode)	(ANNUAL QUANTITY OF WASTE	MEASURE (Enter (code)	(1)) PF	700	ESS	COL	DES	(En	ter ((2) PROCESS DESCRIPTION (If a code is not entered in D(1))				
1	ן ט ו) [81	4	250	-	S	0	İ	ιŢ	Si	οİ	2	I	0) [4	ABCEFGH	X99A B
2	U :	o İ	81	s	250	Ţ	S	1	اد	1	s	d	2	T	0	1 2		ABCEFGH	Х99А В
3	ช :	0	81 (6	100	Ţ	s	lo		1	s	ol	2	T	0			ABCEFGH	X99A B
- ! 4	ן ט	0	81	7	250	τ	S	lo	1	1	s	ol	2	T	O		4	ABCEFGH	Х99А В
5	ן ט	0	81	8	250	Ţ	S	1) L	1	s	ol	2	T	10		4	ABCEFGH	X99A B
6	ן ט	0	8	9	250	T	S	1	<u> </u>	1	s	0	2	T	10)	4	ABCEFGH	X99A B
7	U	0	9	d	250	τ	s	1	0	1	sl	0	2	T	1	3	4	ABCEFGH	X99A B
. 8	U I	0	9	1	250	Ţ	S	1	0	1	s	0	2	T	1	0	4	ABCEFGH	X99AB
9	וט	οl	9	2	250	τ	S	1	0	1	s	0	7	T		0	4	ABCEFGH	X99AB
1 i 0	ן ט	01	9	3	250	ī	S	1	0	1	S	0		1		0	4	ABCEFGH	X99AB
1 1	ן ט	0	9	4	250	ī	S	1	0	1	s	0		4 1		0	4	ABCEFGH	X99AB
1 2	u	ol	9	s	250	T	S	;	0	1	S	0		2 7		0	4	ABCEFGH	X99AB
1 3	u	0	9	6	250	Ī	15	31	0	1	S	d		4	r	0	4	ABCEFGH	X99AB
1 4	U	0	9	7	100	T	S		0	1.	S	0		2 7		0	4	ABCEFGH	X99 AB
1 5	U	0	9	8	250	ī	S	:	0	i	S	0		2 7		0	4	ABCEFGH	X99AB
1 6	ט	0	9	9	250	T	1	3	0	1	s	0	2	T	rT	0	4	ABCEFGH	X9 9A ^B
1 7	U	ī	0	1	250	Ī	7	5	0	1	S	0	2	. '	I	0	4	ABCEFGH	X99AB
1 8	U	ı	01	2	250	r	1	s i	0	1	S	0	2		T	0	4	ABCEFGH	X99AB
1 : 9	ט	ı	0	3	100	ī	1	S	0	I	S	1 0	1 2	2	T	0	4	ABCEFGH	Х99Ав
2 0	u	1	0		250	ī		S	0	1	S	1	1 2	2	T	0	4	ABCEFGH	X99AB
2 1	U	1	01	6	250	ī	1	S	0	1	S		7	2	T	0	4	ABCEFGH	X99AB
2 2	+	1	0	. 7	250	ī	十	S	0	1	S	() :	2	T	0	4	ABCEFGH	X99A :
2 3	-	1	0	8		T	十	S	0	i	S	1) :	2	I	Ö	4	ABCEFGH	X99A
2 4	╌┼╌╴	1	0	9	250	T	+	S	0	1	. 5	3)	2	T	0	4	ABCEFGH	X99AI
2	+-	1	1	0		T	寸	S	0	1		5	ol .	2	T	0	4	ABCEFGH	X99A1
	5 U	1	1	1	100	T	\dashv	S	0			5	o	2	I	0	4	ABCEFGH	X99A
	, u	1	1	2		T	十	S	0		1 !	s	a	2	T	0	4	ABCEFGH	X99A
	8 U	1	1	3		T	寸	S	0		1 :	si	d	2	T	0	4	ABCEFGH	X99A
	9 U	1	1	4		ī	寸	S	C	+-	+-	÷	o		τ	0	4	ABCEFGH	X99A
	0 U	l		5	 	ī	\dashv	S	i	 -	+-		o	-	T	0	4	ABCEFGH	X99A
 	1 0	1	-	6	+	T	7	S	÷	ol I		si	d	2	T	0	14	ABCEFGH	X99A
	2 U	1	1	┾	250	T	一	S	! -	0	1	SI	0	_	T	0	1 4	ABCEFGH	X99A
-	3 U	11	11	!	250	T	{	S	-	01	+	SI		2	T	10	1 4	ABCEFGH	X99A

EPA I.D. Number (Enter from page 1) Secondary ID Number (Enter from page 1) ILD000608471

				_	EPA	-			STIMATED	C. UNIT OF								D.	PR	OCES	SES		
		HAZARD WASTE NO. (Enter code)				ANNUAL QUANTITY OF WASTE		MEASURE (Enter code)	(1)	PRC	CE	SS (:00	ES (Ente		(2) PROCESS DESCRIPTION (If a code is not entered in D(1))						
	1		ชโ	l	1	1	9		250	T	s	0	l	<u> Es</u>		ol	2 .	<u> </u>	0	4	ABCEFGH	X99A	1
}	2	2	ט	l	2	Ī	0		250	τ	s	o	1	\rfloor	3	d	2 2		<u> </u>	4	ABCEFGH	X99A	1
	1	3	U	1	2		1		250	Ţ _	s	0	1	S		o	2	1	0	4	ABCEFGH	X99A	1
.	4	•	U	1	2	2	2		250	T	s	0	1	5	3	o	2	r	0	4	ABCEFGH	X99A	_
		5	U	1	2	2	3		100	Ţ	s	0	1	1	3	0	2	T	0	4	ABCEFGH	X99A	
	(6	ប	1	2	2	4		250	T	S	0	1		s	0	2	T	0	4	ABCEFGH	X9 9A	
		7	ប	1	1 2	2	. 5		250	ī	s	0	1		s	0	2	T	0	4	ABCEFGH	X99A	
		8	U	!		2	6		250	T	S	0	1		s	0	2	T	0	4	ABCEFGH	X99A	
	<u>i</u>	9	ប		1 2	2	7		250	T	S	0	!	ı	S	0	2	T	0	4	ABCEFGH	X99A	
1		0	U		1	2	8		250	Ĩ	S	0		1	s	0	2	T	0	4	ABCEFGH	X99A	
1		1	Ш		1	2	9		250	T	S	. 0		ı	S	0	2	T	0	4	ABCEFGH	X99A	
1		2	ี		ı	3	0		250	T	S	0		i	S	0	4	T	0	4	ABCEFGH	X9 9A	
1		3	บ		ı	3	1		250	T	S	C)	1	S	q	2	T	0	4	ABCEFGH	X9 9A	
1		4	บ		ı	3	2		250	Ţ	S	0		i	S	0	2	I	0	4	ABCEFGH	X99 A	
1		5	U		ı	3	3		250	T	S	0		Ī	S	0	2	T	0	4	ABCEFGH	X9 9A	١.
1	Ţ	6	บ		1	3	4		100	I	S	C		1	S	0	2	T	0	4	ABCEFGH	X9 9A	_
1		7	ט		ı	3] :	5	250	T	s)	1	S	0	2	T	0	4	ABCEFGH	X992	
1	1	8	U		ı	3	1	5	100	T	S)	1	S	0	2	T	0	4	ABCEFGH	X99/	
1	Ī	9	Ü		1	3		7	250	T	S	()	1	S	0	2	T	0	4	ABCEFGH	X994	
2		0	U		1	3	1	3	250	T	S		0	1	S	0	2	T	0	4	ABCEFGH	X99	
2		1	Ü	1	1	4	T	0	250	T	S		0	1	S	0	2	T	0	4	ABCEFGH	X9 9	A
2	: [2	ľ	ı	1	4	T	1	250	T	S		0	1	S	0	2	T	0	4	ABCEFGH	X9 9.	_
2		3	t	ı	1	4		2	100	T	S		0	1	S		2	T				X9 9	_
[2	2	4	į	ı	1	4		3	100	T	5		0	1	S	C	2	T	0	4	ABCEFGH	X9 9	
[2	2	5	l	,	ı	4		4	100	T		3]	0	1	S	(2	T	0	4		X99	_
[2	2	6	l	j	1	4		5	250	T		3	0	1	S	(2	T	C	4		X99	
	2	7	J	,	ı	4		6	100	T		5	0	1	S		0 2	T	9	4	ABCEFGH	X99	
	2	8	l	J	1	4		7	100	T		s	0	1	S		0 2	T	() 4	ABCEFGH	X99	
	2	9	I	J	1	4		8	250	T		s	0	1		3	0 2	Ţ	1	4	ABCEFGH	X99	
	3	0	T	נ	l	4		9	250	T		s	0	1	5	3	0 2	7) 4	ABCEFGH	X99	_
	3	1	Ji	<u>י</u>	l	5	5	0	100	T		s	0	1	5	3	0 2	1	: [) 4		X99	_
	3	2	1	ט	1	5	;	1	250	T		s	0	1	1	3	0 2	1		0 4		X99	-
	3	3	1	וט	i	5	;	2	250	ī		s	0	1	1 :	5	0 2	1		0 4	ABCEFGH	X99	9

EPA I.D. Number (Enter from page 1)

I L D O O O 6 O 8 4 7 1

Secondary ID Number (Enter from page 1)

XIV. Description of	Hazardous Wastes	(Continued)

•		1	_	A. 1	EP/	1	_	B. ESTIMATED	C. UNIT OF								0.	PR	CES	SES		
Lin Num		~	W	AST Medical	E	VO.		ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1)	PRO	CES	3 C0	DE	:S (E	inte	r co	de)		(2) PROCESS DE)
į	1	<u>.</u>	Ü	1	!	5):	3	250	Ţ	s	0	ı	S	0	:	2 .	I _	0	4	ABCEFGH	X99A	В
	1	2	Ü	1	!	5 4	4	250	T	s	ol	1	S		2	2 1		0	4	ABCEFGH	X99A	В
	;	2	ប	1		5 :	5	250	T	s	0	1	s	0		2	1	0	4	ABCEFGH	X99A	В
<u>:</u>	-	•	U	1		5	6	100	T	s	0	1	s	C		2	r	0	4	ABCEFGH	X99 A	В
	,	5	U	1		5	7	250	T	s	0	1	s	(2	T	0	4	ABCEFGH	X99A	В
		6	U	1	Ī	5	8	250	T	S	٥	1	s	()	2	T	0	4	ABCEFGH	X99A	В
ļ	•	7	U	1		5	9	250	T	s	0	1	s		0	2	T	0	4	ABCEFGH	X99 A	В
		8	U	1		6	0	100	T	S	0	1	s		0	2	T	0	4	ABCEFGH	X99A	В
		9	U	1	T	6	1	250	T	S	0	1	S		0	4	T	0	4	ABCEFGH	X99A	В
1		0	ប	1		6	2	250	ī	s	0	1	S		0	4	T	0	4	ABCEFGH	X99A	В
1		1	U	1		6	3	250	T	S	.0	1	s		0	4	T	0	4	ABCEFGH	X99A	В
1		2	ט	1		6	4	250	T	S	0	1	S		9	4	I	0	4	ABCEFGH	X9 9A	В
1	T	3	U	1	T	6	5	250	T	S	0	1	. 5		q	4	I	0	4	ABCEFGH	X9 9A	В
1		4	บ	1	1	6	6	250	T	S	0	1	S	1	0	2	T	0	4	ABCEFGH	X9 9A	B
1	T	5	Ü	1	ı	6	7	250	T	S	0	1	S		0	2	T	0	4	ABCEFGH	X99A	В
1		6	U	1	ı	6	8	250	ī	S	0	1	. 5		0	2	T	0	4	ABCEFGH	X9 9A	В
1		7	,,	,		6	9	250	T	s	0) ;		3	0	2	T	0	4	ABCEFGH	X9 9A	В
1		8	U		1		0	250	T	S	C) [1 !	s	0	2	T	0	4	ABCEFGH	X99A	В
1		9	U		1		1	250	T	s	1)	1 :	S	0	2	T	0	4	ABCEFGH	X99A	В
2	Ī	0	U	T	ı	7	2	100	ī	S	1	2	1 :	s	0	2	T	0	4	ABCEFGH	X99A	В
2	1	1	U		ı	7	3	100	ī	S	1	0	1	S	0	2	T	0	4	ABCEFGH	X99A	В
2		2	U		1	7	4	100	T	s	1	0	ı	s	0	2	T	0	4	ABCEFGH	X9 9/	\ B
2		3	U	1	ī	7	6	100	T	8		0	1	s	9	2	I	0	4	ABCEFGH	X9 94	A B
2	:	4	U	1	ī	7	7	100	T	1	1	0	1	s	o	2	T	0	4	ABCEFGH	X9 9	AВ
2	1	5	U	1	1	7	8	100	T	1 8	1	0	1	S	0	2	T	0	4	ABCEFGH	X99	A B
2	1	6	υ		1	7	9	100	T	1	3	0	1	S	0	2	T	0	4	ABCEFGH	X99	A B
2		7	U	1	ı	8	0	250	Ţ	18	3	0	1	S	O	2	I	0	. 4	ABCEFGH	X99	A B
2	2	8	ľ	+	ı	_	1		ī	1	s	0	ı	s	0	2	τ	0	4	ABCEFGH	X9 9.	A B
2	2	9	ί	+	1	8	+-	+	T	_	s	न	1	S	0	2	ī	0	4	ABCEFGH	X9 9	A B
3	3	0	τ	1	1	8	3	250	t	1	5	0	1	S	0	2	1	0	4	ABCEFGH	X99	AB
1	,	1	t	7	1	8	1	4 250	Ī	1	s	0	1	s	0	2	1	: 0	4	ABCEFGH	X99	A B
1	3	2	t	,	Į.	8	5 5	250	T	\top	S	0	1	S	0	2	1	: 0) 4	ABCEFGH	X99	ĀΒ
	3		┿		1	Я	6	250	ī	1	s	0	1	S	0	2	7	: () 4	ABCEFGH	X99	AB

EPA I.D. Number (Enter from page 1)

Secondary ID Number (Enter from page 1)

ILD000608471

XIV. Description of Hazardous Wastes (Continued)

				A. [-		8.	ESTIMATED	C. UNIT OF									0.1	PRO	CE	SSES	
Lit Nun			W	AZ AST Hor	E۱	_		QI	ANNUAL UANTITY OF WASTE	MEASURE (Enter code)	(1) Pl	ROC	:ES:	s co	DES	Œn	ter c	od	o)		(2) PROCESS DI (If a code is not e	
		1	U	1	1	B) 7	7		250	T	s	O		ī	s	ol	2	Ţ	_ c	1	4	ABCEFGH	Х99А В
		2	U	1		8 8	В		250	Ţ	s		<u> </u>	1	s	d	2	T	0	1.	4	ABCEFGH	Х99А В
		3	ប	1		8	9		250	T	S	0		1	s	0	2	T	0		4	ABCEFGH	Х99 А В
:		4	U	1		9	0		100	τ	S			ı	s	0	2	I	C		4	ABCEFGH	X9 9A B
		5	ប	1		9	1		250	T	s		<u>)</u>	1	S	0	2	T)	4	ABCEFGH	Х9 9А В
		6	U	1		9	2		250	T	S		0	1	Ś	0	2	Ţ)	4	ABCEFGH	X9 9A B
		7	U	1		9	3		250	T	S		0	1	S	0	2	T		0	4	ABCEFGH	X99 A B
		8	บ	1		9	4		250	T	S	T	o	1	S	0	2	I		0	4	ABCEFGH	X99A B
	Ī	9	U	1	T	9	6		250	T	S		0	1	S	0	1	T		0	4	ABCEFGH	X99A B
1		0	U	1		9	7		250	T	2	:	0	1	S	0	:	1		0	4	ABCEFGH	X99A B
1	1	1	U	1	2	q	0	T	250	T	1	; ·	0	1	S	0		7		0	4	ABCEFGH	X9 9A _B
1	Ť	2	ט	:	2	d	1	T	100	T	1	3	0	1	S	C		2 1	1	0	4	ABCEFGH	X99A B
1	1	3	U	:	2	d	2	T	250	T	1	5	0	1	S	(1	4 :	-	0	4	ABCEFGH	Х99А в
1	1	4	U		2	d	3	Ť	250	ī	1	3	0	1	S	0		2 7		0	4	ABCEFGH	Х99А в
1	1	5	U	Τ	2	þ	4	1	100	T	18	3	0	1	S	0	1	2 1		0	4	ABCEFGH	X99 A B
1	1	6	,,	T	2	d	5	†	250	I	1	5	0	1	s	1	2	1	r	0	4	ABCEFGH	X99 A B
1		7	U	1	2	d		+	250	Ī		5	0	1	S		2	1	r	0	4	ABCEFGH	X99A B
1		8	U	1	2	d		Ť	250	T	1	s	0	1	S	1) 2		r	0	4	ABCEFGH	Х99Ав
1		9	ľ	T	2	7		+	250	T	1	S	Ó	1	5		0 2	: 1	T	0	4	ABCEFGH	X99AB
1	2	0	ľ	+	2	0	-	,	250	T	T	S	0	1		3	0 2	2	T	0	4	ABCEFGH	Х99АВ
7	2	1	1	+	2	1	t	0	250	T	1	S	0	1		3	0 2	2	T	0	4	ABCEFGH	X99A E
	2	2	╅╾	,	2	1		ı	250	T	1	S	0	1	: :	3	0 2	2	T	0	4	ABCEFGH	X99A ¹
\vdash	2	3	+	1	2	1	-	3	250	T.	\dashv	S	0	1		S	9	2	T	0	4	ABCEFGH	X9 9A 1
\vdash	2	4	+-	<u>」</u>	2			4	100	T	T	S	0	1	1	S	9	2	T	0	4	ABCEFGH	X9 9A ¹
h	2	5	+-	ונ	2		+-	5	250	T	7	S	0		i	S	0	2	T	0	4	ABCEFGH	X9 9A ₁
	 2	6	+-	ט ט	2		+-	6	250	т	T	S	0		ı	s	0	2	T	0	4	ABCEFGH	X99A 1
\vdash	2	7	+	וט	2	_	┿	7	250	T	寸	S	0		ī	s	a	2	T	0	1	ABCEFGH	X99A 1
-	2	8	+-	U	2	_	+	8	250	T	1	S	0	1	1	s	0	2	T	O	1	ABCEFGH	X99A
-	<u> </u>	9	+-	U I	2		\dagger	9	250	T		S	\vdash	+	1	s	-	2	T	0	1	ABCEFGH	X99A
\vdash	3	0	+	U	2	_	+-	0	250	T		S	i -	+-	ı	s	0	2	T	0		4 ABCEFGH	X99A
┢	3	1	┿	U	2	<u> </u>	+	귑	250	T		S	+	5	1	s	-+	2	T	0	1	4 ABCEFGH	X99A
\vdash	3	┿	+	ט		2	┿	2		T		S	+-	5	1	s	O	2	T	C	1	4 ABCEFGH	X99A
⊢	3	i –	+	U		2	+	3		ī		S	1	5	1	S	0	2	T	10	ol I	4 ABCEFGH	X99A

Secondary ID Number (Enter from page 1) EPA I.D. Number (Enter from page 1) ILD000608471

XIV. Description	of Hazardous	Wastes	(Continued)
Land to manage in Figure		110000	

UV.	Des	ser		י חנ	9 1	ne2		JOU	s Wastes (Cont	nuea)						_				_					
				4. E AZ				8.	ESTIMATED ANNUAL	C. UNIT OF									0. Pl	ROC	ESS	:ES			
Lin Yum	_	,	W	157	E	NO DOG	-	0	UANTITY OF WASTE	(Enter	(1)	PR	OC1	ESS (COE)ES	(En	ter c	ode)			(2) PROCES (If a code is n)
İ	1	I	J	2	12	:]	5		250	τ	s	0	l	$\int s$	sl	ol	2	T	0	4	A	BCEFGH		X99A	В
	2	1	ן ט	2	2	:	6		250	ī	S	0		ı	s	d	2	T	0	4	A	BCEFGH		X99A	В
	3		ן ט	2	2	2	7		250	T	S	0	1		s	0	2	T	0	4	A	BCEFGH		X99 A	В
	4		ן ט	2	12	2	8		250	T	S	0	.] ;	1	s	0	2	T	0	4	A	BCEFGH		X99A	В
	5		ט	2	1:	3	4		250	τ	S	0		1	s	o	2	T	0	4	A	BCEFGH		X99 A	В
	•		ט	2		3	5		250	Ĩ	S	C		1	s	0	2	I	0	4		BCEFGH		X9 9A	В
	7	,	U	2		3	6		250	T	S	1		1	s	0	2	I	0	1	4 4	ABCEFGH	<u> </u>	X99A	В
			U	2	: :	3	7		250	Ţ	S	1)	ı	s	0	2	T	0		4 4	ABCEFGH		X99A	В
	9	•	บ	2	:	3	8		250	Ţ	S		0	1	S	0	2	τ	0		4 4	ABCEFGH		X99A	В
1	(0	บ	2	2	3	9		250	Ī	S		0	1	S	0	2	I	0		4	ABCEFGH		X9 9A	В
1	1	1	U	2	2	4	0		250	T	S	1.	0	1	S	0	2	1	0		4	ABCEFGH		X99A	
1	:	2	U	2	2	4	3		250	T	S		0	1	S	0	3	7			4	ABCEFGH		X9 9A	В
1		3	U	1	2	4	4	·I	250	T	5		0	1	S	Q		4 7	: (1	4	ABCEFGH		X9 9/	
1		4	U	1	2	4	6	1	250	T	S		0	1	S	0	3	2 T	0	1	4	ABCEFGH		X9 9/	
1		5	U	:	2	4	7	7	250	ī	8		0	1	S	0	1	2 1			4	ABCEFGH		X99/	
1		6	Ų	• .	2	4	8	3	250	T	\$		0	1	S	0	2	1	: ()	4	ABCEFGH		X99	
1		7	ŭ		2	4	9	•	250	T	!	3	0	1	S	0	2	1		2	4	ABCEFGH		X99	
1	1	8	ប		3	2	1	3	250	T	!	3	0	1	S	C	2		r	0	4	ABCEFGH		X99	
1		9	U		3	5		3	250	T	1	5	0	1	S	0	2		I	0	4	ABCEFGH		X99	
2		0	ט		3	5		9	250	T		5	0	1	S	9	2		T	이	4	ABCEFGH	 	X99	
2		1	F		0	0		2	7,500	T		S	0	1	S) 2	2	T	0	4	ABCEFGH	TOLA	X99	
2		2	K		0	6		4	250	T		S	0	1	S		0 2	2	T	0	4	ABCEFGH		X99	
2		3	K	T	0	6	I	5	250	T		8	0	l	S	<u> </u>	0 2		T	이	4	ABCEFGH		X99	
2		4	K		0	6		6	250	T		S	0	1	S		0 2	2	T	이	4	ABCEFGH	<u> </u>	X99	
2		5	K		1	5		6	250	T		S	0	1	5	3	0 :	2	T	0	4	ABEFGH		X99	
2		6	K	T	ı	5		7	250	I		S	0	1	5	S	o :	2	T	0	4	ABEFGH	,	X99	-
2		7	K		1	5		8	250	T		S	0	1	!	s	0	2	T	0	4			X9:	
2		8	K		1	5		9	250	T		S	0	1	!	s	o	2	T	0	4	ABEFGH		X9	
2	:	9	K		1	6	T	0	250	T		S	0	1		s	o	2	T	0	4	ABEFGH		-	9A
3	1	0	K	:	1	6		1	250	T		S	0	1		S	0	2	T	0	4	ABEFGH		X9	9Ā
3		1	Ų	+	2	7		ı	250	T		S	0	1		s	o	2	T	0	4			X9 9	В
1	3	2	t	1	2	7	,	7	250	T		S	0	1		s	O	2	T	0				X99	B
Η,	3	3	1,	ı	2	17	$\overline{}$	8	250	ī		S	0	1	LΓ	S	0	2	T	0	4	ABEFGH		X9 9	B

Form Approved, CMB No. 2030-0034 Expres 10/31/99 GSA No. 0248-EPA-07

EPA I.D. Number (Enter from page 1)

Secondary ID Number (Enter from page 1)

ILD000608471

XIV. Description of Hazardous Wastes (Continued)

				A. 1			1	B. ESTIMATED	C. UNIT OF). PR	OCI	SSES
Li Nun	ne		W	AST Inter	EN	0.		ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1)) PR	OCE	ss c	ODE	S (En	ter co	ode)		(2) PROCESS DESCRIPTION (If a code is not entered in D(1))
		1	ប	2	7	١)	250	τ	S	0	<u> -</u>	s	0	2	T	o	4	ABEFGH X99B
	_	2	U	2	8	1	1	250	T	s	0	1	s	0	2	T	ol	4	ABEFGH X99B
		3	Ŭ	3	6	1	٤	250	T	S	0	1	s	0	2	T	0	4	ABEFGH X99B
:		4	Ü	3	6		5	250	T	S	0	1	s	0	2	T	0	4	ABEFGH X99B
		5	U	3	6	1	5	250	T	S	0	1	s	0	2	T	0	4	ABEFGH X99B
	L	•	ប	3	6		7	250	Ţ	S	0	1	S	0	2	T	0	4	ABEFGH X99B
		7	ט	3	7		2	250	Ţ	S	0	1	S	0	2	T	0	4	ABEFGH X99B
		8	U	3	7		3	250	ī	S	0	1	S	0	2	T	0	4	ABEFGH X99B
	1	9	U	3	7		5	250	T	S	0	1	S	0	2	T	0	4	ABEFGH X99B
1		0	ซ	3	7	Ī	6	250	τ	s	0	1	S	0	2	T	0	4	ABEFGH 1998
1		1	U	3	7		7	250	T	s	0	1	S	0	2	T	0	4	ABEFGH X99B
1		2	U	3	7		8	250	T	s	0	1	s	0	2	T	0	4	ABEFGH X99B
1		3	ប	3	7		9	250	T	s	0	l	s	0	2	T	0	4	ABEFGH X99B
1		4	U	3	8		1	250	T	S	0	1	s	0	2	T	0	4	ABEFGH X99B
1		5	U	3	8		2	250	Ť	5	0	l	s	0	2	T	0	4	ABEFGH X99B
1		6	U	3	8		3	250	T	3	0	l	S	0	2	T	0	4	ABEFGH X99B
1		7	U	3	8		4	250	τ	s	0	1	S	0	2	I	0	4	ABEFGH X99B
1	1	8	Ü	3	8		5	250	T	S	0	1	S	0	2	T	0	4	ABEFGH X99B
1		9	U	3	8	}	6	250	T	s	0	1	s	0	2	T	0	4	ABEFGH X99B
2	1	0	ប	3	8		7	250	T	S	0	1	s	0	2	T	0	4	ABEFGH X99B
2		1	U	3	8		9	250	T	3	0	1	S	0	2	τ	0	4	ABEFGH X99B
2		2	ซ	3	9		0	250	T	8	0	1	s	0	2	T	0	4	ABEFGH X99B
2	1	3	U	3	9		1	250	T	S	0	1	S	0	2	T	0	4	ABEFGH X99B
_2		4	ŋ	3	9		2	250	T	3	0	1	s	0	2	T	0	4	ABEFGH X99B
_2	1	5	ט	3	9		3	250	T	3	0	1	S	0	2	I	0	4	ABEFGH X99B
2	1	6	ŭ	3	9		4	250	T	S	0	1	S	0	2	T	0	4	ABEFGH X99B
_2		7	U	3	1 9		5	250	T	В	0	1	S	0	2	T	0	4	ABEFGH X99B
_2		8	ប		1 9		6	250	Ţ	Б	0	1	S	0	2	I	0	4	ABEFGH X99B
2	2	9	U	1	. 0		0	250	T	Б	0	1	S	0	2	I	0	4	ABEFGH X99B
[3		0	ט	4	0		ı	250	T	5	0	1	S	0	2	T	0	4	ABEFGH X99B
3	1	1	ט	1	. 0		2	250	T	S	0	1	S	0	2	T	0	4	ABEFGH X99B
1		2	บ	1)	3	250	T	5	O	1	S	0	2	T	0	4	ABEFGH X99B
3	1	3	U	1	. 0)	4	250	T	Б	0	1	s	10	2	T	0	4	ABEFGH X99B

·-----

Secondary ID Number (Enter from page 1)

EPA I.D. Number (Enter from page 1)

I L D O O O 6 O 8 4 7 1

XIV. Description of Hazardous Wastes (Continued)

	Ī			EF		_	1	L ESTIMATED	C. UNIT OF				<u></u>					D. P	RO	CES	SES		
Line Nume	- 1	И	/AS	ZA TE	N) .	1	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1)	PF	70C	ESS	COL	ES	(En	ter c	ode	,		(2) PROCESS (If a code is no		
	1	บ	1	٠١،)	7		250	T	s	0	1	ı	s	ol	2	T	0	1		ABEFGH	х99в	
	2	Ü	1	41	0	9		250	T	S	0		ı	s	ol	2	τ	0	1	4	ABEFGH	X99B	
	3	U		4	ı	0)	250	T	S	0		ı	s	0	2	T	0		4	ABEFGH	X99B	-
	4	Ų		4	ı]		250	T	S	0		ı	s	0	2	T	0		4	ABEFGH	X99B	
	5	P		1	2		7	250	T	S	0		1	s	0	2	T	0		4	ABEFGH	199 B	
	6	P		ı	2	1	3 ∫	250	T	S	C	\prod	1	S	o	2	T	0		4	ABEFGH	199 B	
	7	P	T	1	8	:	5	250	T	s	C	ī	ı	S	0	2	T	0		4	ABEFGH	X99B	
	8	P	T	1	8		8	250	τ	S	0) [1	s	0	2	T	0		4	ABEFGH	X99B	-
	9	P	Ì	1	8		9	250	T	S	(o	1	s	0	2	T	0		4	A BE FGH	х99в	
1	0	P	1	1	9		0	250	T	S	1	0	1	S	0	2	T	0		4	ABEFGH	299 B	
1	1	P	1	1	9	T	1	250	T	S	1	0	1	S	0	2	T	0		4	ABEFGH	299 B	
1	2	F	·T	ı	9	T	2	250	T	S		0	ī	S	0	2	T	C		4	ABEFGH	х99в	
1	3	E	·T	1	9		4	250	T	s		0	1	S	0	2	T	0	5	4	ABEFGH	X99 B	
1	4	I	•	ı	9	T	6	250	T	S	T	0	1	S	0	2	T	1)	4	ABEFGH	199 B	
1	5	1	,	1	9	1	7	250	T	s	1	0	ı	S	0	2	T	1	וכ	4	ABEFGH	X99B	
1	6	Ī	,	1	9	1	8	250	T	S	T	0	1	S	0	2	T	1	5	4	ABEFGH	X99B	
1	7	ī	?	1	9	1	9	250	ī	s		0	1	S	0	2	I	. (0	4	ABEFGH	X99B	
1	8	1	?	2	0	1	1	250	T	S	1	0	1	S	0	2	1		0	4	ABEFGH	X99 B	
1	9	1	2	2	0	1	2	250	ī	S		0	1	S	0	2	1	: 1	0	4	ABEFGH	X99 B	
2	0		P	2	O	7	3	250	r	S	1	0	1	S	0	2	1		0	4	ABEFGH	X99 B	
2	1		P	2	C)	4	250	T	S	1	0	1	S	C	2	7		0	4	ABEFGH	X99 B	
2	2	T	P	2	C	,	5	250	T	S		0	1	S	C	2	7	٢	0	4	ABEFGH	х99в	
2	3	1	K			4	0	15,000	T	1	3	0	1	s	o		2	F	0	4	ABCRPGE	ŻÓLA	х99в
2	4	1	Ū	4	(2	8	15,000	T		3	0	1	S	0		2 '	r	0	4	ABCEFGE	TOLA	X9 9B
2	5		K	;	ı	6	9	15,000	T		8	0	1	9		0	2 9	F	0	4	ABCRFGE	TOLA	х99в
2	6		K		ı	7	0	15,000	T		5	0	1	S		0	2	T	0	4	ABCRFGH	TOLA	х99в
2	7	·	K		ų	7	1	15,000	T		8	0	1	s		0	2	7	0	4	ABCEFGE	TOLA	X9 9B
2	6		K		ı	7	2	15,000	T		S	0	1	S		0	2	T	0	4	ABCEPGH	TOLA	х99в
2	9	,	K	1	I	7	4	15,000	T		s	0	1	s		2 2		r	0	4	ABCEFGH	TOLA	х99в
3	(,	ĸ	1		7_	5	15,000	T		s	0	1	s	1	2 2	: [:	r	0	4	ABCEFGH	TOLA	х99в
3					T																		
3	1	2			T																		
3	1:	3			T			1							T						1		

A I.D. Number (Enter from page 1)	Secondary ID Number (Enter from page 1)
L D000608471	
ː Map	
Attach to this application a topographic map, or other equivalent map, of the coundaries. The map must show the outline of the facility, the location of estructures, each of its hazardous waste treatment, storage, or disposal facinclude all springs, rivers and other surface water bodies in this map area.	ach of its existing and proposed intake and discharge ilities, and each well where it injects fluids underground.
/I. Facility Drawing	
All existing facilities must include a scale drawing of the facility (see instru	ctions for more detail).
/il. Photographs	
All existing facilities must include photographs (aerial or ground-level) tha storage, treatment and disposal areas: and sites of future storage, treatme	
/III. Certification(s)	· · · · · · · · · · · · · · · · · · ·
th a system designed to assure that qualified personnel properly gathe quiry of the person or persons who manage the system, or those person formation submitted is, to the best of my knowledge and belief, true, acci	r and evaluate the information submitted. Based on m is directly responsible for gathering the information, the urate, and complete. I am aware that there are significan
ertify under penalty of law that this document and all attachments were pith a system designed to assure that qualified personnel properly gathe quiry of the person or persons who manage the system, or those person formation submitted is, to the best of my knowledge and belief, true, accumulates for submitting false information, including the possibility of fine and the company of the possibility of the end of the company of the possibility of the end of the company of the possibility of the end of the company of the possibility of the end of the company of the possibility of the end of the company of the possibility of the end of the company of the possibility of the end of the company of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility of the possibility o	r and evaluate the information submitted. Based on must directly responsible for gathering the information, the urate, and complete. I am aware that there are significant imprisonment for knowing violations.
th a system designed to assure that qualified personnel properly gathe quiry of the person or persons who manage the system, or those person formation submitted is, to the best of my knowledge and belief, true, accumulates for submitting false information, including the possibility of fine and the possibility of the end of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of	r and evaluate the information submitted. Based on m is directly responsible for gathering the information, the urate, and complete. I am aware that there are significan
th a system designed to assure that qualified personnel properly gather quiry of the person or persons who manage the system, or those person formation submitted is, to the best of my knowledge and belief, true, accumulates for submitting false information, including the possibility of fine elements of the submitting false information.	r and evaluate the information submitted. Based on must directly responsible for gathering the information, the urate, and complete. I am aware that there are significant and imprisonment for knowing violations.
ith a system designed to assure that qualified personnel properly gathe quiry of the person or persons who manage the system, or those person formation submitted is, to the best of my knowledge and belief, true, accumulates for submitting false information, including the possibility of fine and personnels.	r and evaluate the information submitted. Based on must directly responsible for gathering the information, the urate, and complete. I am aware that there are significant and imprisonment for knowing violations.
ith a system designed to assure that qualified personnel properly gather quiry of the person or persons who manage the system, or those person formation submitted is, to the best of my knowledge and belief, true, accumulates for submitting false information, including the possibility of fine and continuous control of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the system of the s	r and evaluate the information submitted. Based on miss directly responsible for gathering the information, the urate, and complete. I am aware that there are significant imprisonment for knowing violations.
th a system designed to assure that qualified personnel properly gather quiry of the person or persons who manage the system, or those person formation submitted is, to the best of my knowledge and belief, true, accumulates for submitting false information, including the possibility of fine elements of the submitting false information, including the possibility of fine elements of the submitting false information. In the submitting false information including the possibility of fine elements of the submitting false information. Including the possibility of fine elements of the submitting false information. Including the possibility of fine elements of the submitting false information. Including the possibility of fine elements of the submitting false information. Including the possibility of fine elements of the submitting false information. Including the possibility of fine elements of the submitting false information. Including the possibility of fine elements of the submitting false information. Including the possibility of fine elements of the submitted false information. Including the possibility of fine elements of the submitted false information. Including the possibility of fine elements of the submitted false information including the possibility of fine elements of the submitted false information. Including the possibility of fine elements of the submitted false information including the possibility of fine elements of the submitted false information including the possibility of fine elements of the submitted false information including the possibility of fine elements of the submitted false information including the possibility of fine elements of the submitted false information including the possibility of fine elements of the submitted false information including the submitted false information including the possibility of fine elements of the submitted false information including the submitted false information including the submitted false information including the submitted false information in	r and evaluate the information submitted. Based on miss directly responsible for gathering the information, the urate, and complete. I am aware that there are significant imprisonment for knowing violations.
ith a system designed to assure that qualified personnel properly gather quiry of the person or persons who manage the system, or those person formation submitted is, to the best of my knowledge and belief, true, accumulates for submitting false information, including the possibility of fine elements of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the person of the p	r and evaluate the information submitted. Based on miss directly responsible for gathering the information, the urate, and complete. I am aware that there are significant and imprisonment for knowing violations. Solution
ith a system designed to assure that qualified personnel properly gather quiry of the person or persons who manage the system, or those person formation submitted is, to the best of my knowledge and belief, true, accumulates for submitting false information, including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information. Including the possibility of fine and continuous false information false information. Including the possibility of fine and continuous false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false information false	r and evaluate the information submitted. Based on miss directly responsible for gathering the information, the urate, and complete. I am aware that there are significant imprisonment for knowing violations.
ith a system designed to assure that qualified personnel properly gather quiry of the person or persons who manage the system, or those person formation submitted is, to the best of my knowledge and belief, true, accumulates for submitting false information, including the possibility of fine and official Title (Type or print) Anthony G. Ianello, Executive Director, IL Interesting and Official Title (Type or print) Deferator Sypanyie Deferator Sypanyie Stephen H. Moynthan, Senior Vice President Deferator Signature	r and evaluate the information submitted. Based on miss directly responsible for gathering the information, the urate, and complete. I am aware that there are significant imprisonment for knowing violations.
ith a system designed to assure that qualified personnel properly gather quiry of the person or persons who manage the system, or those person formation submitted is, to the best of my knowledge and belief, true, acceptables for submitting false information, including the possibility of fine and official Title (Type or print) Anthony G. Ianello, Executive Director, IL Interest Signature ame and Official Title (Type or print) Stephen H. Moynthan, Senior Vice President person Signature ame and Official Title (Type or print)	r and evaluate the information submitted. Based on miss directly responsible for gathering the information, the urate, and complete. I am aware that there are significant imprisonment for knowing violations.
th a system designed to assure that qualified personnel properly gather quiry of the person or persons who manage the system, or those person formation submitted is, to the best of my knowledge and belief, true, acceptables for submitting false information, including the possibility of fine and official Title (Type or print) Anthony G. Ianello, Executive Director, IL Interest Signature ame and Official Title (Type or print) Stephen H. Moynahan, Senior Vice President person Signature ame and Official Title (Type or print)	r and evaluate the information submitted. Based on miss directly responsible for gathering the information, the urate, and complete. I am aware that there are significant imprisonment for knowing violations.
ith a system designed to assure that qualified personnel properly gather quiry of the person or persons who manage the system, or those person formation submitted is, to the best of my knowledge and belief, true, acceptables for submitting false information, including the possibility of fine and official Title (Type or print) Anthony G. Ianello, Executive Director, IL Interest Signature ame and Official Title (Type or print) Stephen H. Moynthan, Senior Vice President person Signature ame and Official Title (Type or print)	rand evaluate the information submitted. Based on miss directly responsible for gathering the information, the urate, and complete. I am aware that there are significant ind imprisonment for knowing violations.
ith a system designed to assure that qualified personnel properly gather quiry of the person or persons who manage the system, or those person formation submitted is, to the best of my knowledge and belief, true, accumulates for submitting false information, including the possibility of fine and official Title (Type or print) Anthony G. Ianello, Executive Director, IL Interesting and Official Title (Type or print) Derator Signature The and Official Title (Type or print) Stephen H. Moyndhan, Senior Vice President perator Signature The and Official Title (Type or print) Stephen H. Moyndhan, Senior Vice President perator Signature The and Official Title (Type or print) IX. Comments	rand evaluate the information submitted. Based on miss directly responsible for gathering the information, the urate, and complete. I am aware that there are significant ind imprisonment for knowing violations.

Note: Mail completed form to the appropriate EPA Regional or State Office. (Refer to instructions for more information)

Clean Harbors Services, Inc. EPA ID No. ILD000608471 Sheet 1 of 2

RCRA PART A FORM ADDITIONAL INFORMATION

Section VIII. Facility Owner

A. Name of Facility's Legal Owner

CHSI is the owner/operator of the hazardous waste facility. The land on which the facility is located is owned by the Illinois International Port District, a government entity.

Section XII. Process Codes and Design Capacity

Line 05. Disposal in Surface Impoundments (D83)

CHSI notes that the four (4) surface impoundments identified by this sentry have been certified as closed by the IL EPA. The impoundments no longer accept hazardous waste, and currently operate under an approved Post Closure management plan. A list of the waste codes which were disposed in the impoundments is included in Appendix D-30 of the approved RCRA Part B Application.

Section XIII. Additional Processes

金田田のではずりのない。 あいころなからのあるな

Line 11. 204E - Treatment of D002 Liquids in Containers and Tanks

Treatment of D002 (Corrosive) liquid hazardous waste in containers and tanks by the commingling/mixing of compatible waste streams to adjust pH value. Process design capacity is 416,075 gallons per day in all tank or container systems at the facility.

Line 12. T04F - Treatment of Organic Peroxides in Containers

Treatment of organic peroxide hazardous waste in containers through the addition of water. Process design capacity is 5,000 gallons per day in any container at the facility.

Line 13. 204G - Treatment of Acid Cyanides in Containers

Treatment of acid cyanide hazardous waste in containers through pH adjustment using sodium hydroxide or other alkaline materials. Process design capacity is 5,000 gallons per day in any container at the facility.

Clean Harbors Services, Inc. EPA ID No. ILD 000608471 Sheet 1 of 2

•

Line 14. T04H - Treatment of Hazardous Waste in Containers and Tanks
Using Phase Separation

Treatment of hazardous waste in containers and tanks by phase separation using physical (e.g., gravity separation, filtration) and chemical (e.g., addition of demulsifiers) techniques. Process design capacity is 416,075 gallons per day in all tank or container systems at the facility.

Line 21. X99A - Consolidation of Hazardous Waste using a Compactor

Consolidation of hazardous waste paint and paint-related material contained in small metal and glass containers by processing through a can and glass compactor. Process design capacity of the unit is 7,000 pounds per day of cans of paint and paint-related material.

Line 22. X99B - Hazardous waste shredding system

Shredding of hazardous waste in containers. Process design capacity is 48,000 pounds per hour.

Section XIV. Description of Hazardous Waste

CHSI notes that Process Code " T01A" in Column D(2) refers to the Listed Waste Treatment System identified on Line 06 in Section XII.

CHSI also notes that Process Codes "T04A" through "T04H" refer to the various container and/or tank treatment processes described in Lines 01 through 14 in Section XIII.



11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 60617 (773) 646-6202 • FAX (773) 646-6381

Visit our Website at www.cleanharbors.com

MNOHWI PERMIT SECTION - WMB Waste, Pesticides & Toxics Division U.S. EPA - REGION 5

120 000 608 471

January 28, 2000

Facility Mailing List Addresses

Re: Clean Harbors Services, Inc.

Notification of RCRA Class 1 Permit Modification

Clean Harbors Services, Inc. (CHSI) is a permitted hazardous waste treatment, storage, and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHSI currently operates under a RCRA Part B permit issued by the IEPA on September 30, 1993.

On November 1, 2000 CHSI requested a Class 1 permit modification to the facility Contingency Plan including switching primary and second alternate emergency coordinators, and changing the address and phone number for an emergency response contractor. This Class 1 modification does not require prior approval from IEPA.

On January 7, 2000 CHSI requested a Class 1 permit modification to facility Contingency Plan designating a new first alternate This Class 1 modification does not require emergency coordinator. prior approval from IEPA.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations in 35 IAC 703.281(a)(2) which require CHSI to send a notice of the modification to all persons on the facility mailing list within 90 days after the change is put into effect or within 90 days after IEPA approval if prior approval is required.

If you have any further questions regarding this notice, please feel free to contact me at (773)646-6202.

Sincerely,

- M. Lantitad ∮ames R. Laubsted

CHSI Facility Compliance Manager

cc: Facility Mailing List

Attn: Public Service Director

190 N. State

Chicago, Illinois 60601

WBEI Radio

Attn: Public Service Director

105 W. Adams

Chicago, Illinois 60602

WMAQ/AM

Attn: Fublic Service Director 455 North City Front Plaza

6th Floor

Chicago, Illinois 60611

Hak Cho, DW-8J

U.S. EPA - Region V RCRA Permitting Branch 77 West Jackson Boulevard

Chicago, Illinois 60604

The Honorable Richard Derbin

United States Senator

525 S. 3th Street

Springfield, Illinois 62703

The Honorable Peter Fitzgerald Tinley Fark, Illinois 60477

United States Senator

230 S. Dearborn, Suite 3900

Chicago, Illinois 60604

The Regewisch Herald Attn: News Desk
The Honorable Jessie Jackson, Jr.
United States Representative Chicago, Illinois 60633
17928 S. Halsted Street
Homewood Third

Homewood, Illinois 60430

City News Bureau
The Honorable Bobby L. Rush
United States Representative
655 E. 79th Street
Chicago, Tilinois 60601

Chicago, Illinois 60619

The Honorable Emil Jones

Illinois State Senator 507 West 111th Street

Chicago, Illinois 60628

The Honorable Donne E. Trotter

Illinois State Senator

Illinois State Senato:

8704 S. Constance Ave., Suite 324
Chicago, Illinois 60617

Chicago, Illinois 60617

Chicago, Illinois 60617

Chicago, Illinois 60617

Chicago, Illinois 60617

Chicago, Illinois 60617

Chicago, Illinois 60617

Chicago, Illinois 60617

Chicago, Illinois 60617

Chicago, Illinois 60617

Chicago, Illinois 60617

Chicago, Illinois 60617

Chicago, Illinois 60617

Chicago, Illinois 60617

Chicago, Illinois 60617

The Southtown Economist Attn: News Desk 5959 S. Harlem Avenue Chicago, Illinois 60638

The Times

Attn: News Desk

Post Office Box 5553

2 River Place Mall, Suite I

Lansing, Illinois 60438

Chicago Tribune Attn: News Desk

435 North Michigan Avenue

Chicago, Illinois 60611

Chicago Sun-Times

Attn: News Desk 401 North Wabash

Chicago, Illinois 60611

Star Publications Attn: News Desk

6901 W. 159th Street

The Hegewisch Herald

Hammond Times

601 45th Ave.
Munster IN /

Munster, IN 46321

WJOB Radio



State of Illinois Office of Attorney General Environmental Law Division 500 South Ind Street Springfield, Illinois 62701

Tim Warren
DENR
325 West Adams Street
Springfield, Illinois 62704

Ill. Historic Preservation Agency Preservation Services 1 Old State Capitol Plaza Springfield. Illinois 62701-1512

Illinois Dept. of Natural Resources Resource Management 600 North Grand Avenue West Springfield, Illinois 62706

Deanna Glosser Illinois Dept. of Conservation Division of Natural Heritage 524 South Second Street Springfield, Illinois 62701-1787

Illinois Dept. of Transportation Division of Water Resources 2300 S. Dirkson Parkway Springfield, Illinois 62764

DENR 325 W. Adams St. Springfield, Illinois 62704

Illinois Department of Commerce
 and Community Affairs
620 East Adams Street
Springtield, Illinois 62701

Illinois State Chamber of Commerce 215 East Adams Street Springiield, Illinois 62701

Juan Thomas
Illinois Department of Public
Health
4212 West St. Charles Road
Bellwors: Illinois 60104

The Honorable Harold Murphy Illinois State Representative 2959 West 159th Street Markham, Illinois 60426

The Honorable Arline Fantin Illinois State Representative 52: Burnnam Calumet City, Illinois 60409

The Honorable Constance A. Howard Illinois State Representative 8800 Cottage Grove Avenue Chicago, Illinois 60619-6949

The Honorable Thomas Dart Illing: Emane Representative 102:1 Wouth Western Avenue Chicago, Illinois 60643

The Honorable Todd Stroger Illinois State Representative 8539 South Cottage Grove Chicago, Illinois 60619

The Honorable Monique D. Davis Illinois State Representative 1234 W. Street Chicago. Illinois 60643

Chicago District Corps of Engineers Regulatory Functions Branch Attn: Tom Slowinski, Chief 219 S. Dearborn Chicago: Illinois 60604-1797

State's Attorney Richard Devine County Building, Room 500 110 N. Clark Street Chicago, Illinois 60602

IEPA - Division Manager of Land Pollution Control Maywood Regional Office 1701 First Avenue Maywood, Illinois 60153 Circums Chicago Clerk Chicago City Hall 121 N. LaSalle Chicago, Illinois 60602

Tim Degman, Director

Alderman Robert Shaw 9th Ward 11004 F. Michigan Chicas : Illinois 60628-5642

Committee on Energy, Environmental Illinois ESDA
Protection & Public Utilities 1 Heritage Plaza, Suite 8
121 North LaSalle 7501 Lemont Road
Chicago, Illinois 60602 Woodridge, Illinois 60602

City of Chicago Streets & Sanitation Attn: Joe Brett 2451 S. Ashland Chicago, Illinois 60608

County Clerk
Dr. Karen Scott Cook County Board
Cook County Public Health Dept. 118 N. Clark, Room 434
1500 S. Maybrook Chicagi. Illinois 60602 Maywood, Illinois 60153

Cecil Lue-Hing, Director Research & Development
Metro Water Reclamation District
100 East Erie
Chicago Illinois 60611

Mayor Richard Daley
Chicago Illinois 60601

Chicago Illinois 60602

David Thomas
Hazardous Waste Research
& Intermation Center
1 East Hazelwood Drive
Champas To Illinois 61820

Intergovernmental Affairs
City Hall. Room 603
Ill. State Natural History Survey
121 N. LaSaile
Chicago, Illinois 60602
Champaign, Illinois 61820

John Pope, Alderman

10th Ward

3522 E. 106th Street

Chicago, Illinois 60617

Champaign. Illinois 61820

Illingia State Water Survey 2204 Galifilan Drive Champaign, Illinois 61820

Ms. Jerry Grubman

John H. Firoger, President Cook County Board 118 N. Clark, Room 567 Chicag: Illinois 60602

Robert D. Roache
Ms. Chris Flannery Cook County Env'l. Control
Cook County Public Health Dept. Maybrook Clvic Center, Room 202
1500 S. Maybrook 1500 Maybrook Dr.
Maywood, Illinois 60153 Maywood, Illinois 60153

Calumen Water Reclamation Plant
400 East 130th Street Cook County Sheriff - ESDA
Chicago, Illinois 60628 1401 S. Maybrook
Maywood, Illinois 60153

Caramet Park Mayor 12409 South Throop Street Calumet Park, Illinois 60643

Anthony G. Tanello Executive Director Illinois International Port District 3600 E. 95th Street ∍5th and the Lakefront Chicago, Illinois 60617

Mary T Ryan Vaste Mangement, Inc. P.O. Box 1309 Calumet City, Illinois 60409

Iom Tomaszewski GID Processing Center TIP Processing Center

Post while Box 1296

Talumer Live, Ellinois 60409

Nancy Leprewshi, Village Clerk

14450 Manistee Ave.

Developing Communities Project Loretta Augustine 132 S. Riverdale Chicago, Illinois 60627

Hazel Johnson People for Community Recovery 13116 South Ellis Avenue Chicago, Tllinois 60627

Virginia Cap H.O.F.E. 13031 - arondolet Chicago, Illinois 60633

UNO Attn: Mary Ellen Montes or Bruce Ornstein. 2938 East 91 Street Chicago, Illinois 60617

Barach Doams
Calumer Area Religious Conference
351 East 113 Street
Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Calumer Cal 351 East 113 Street Chicago: Illinois

Chicago Dent. of Health Atth: logar Cieslik Bureau : Health Regulations 50 W. Washington, Room CL88 Chicago, Illinois 60602

City of Chicago Fire Dept. Attr: Frm. M. Eversole Handre Homents Team 55 W. Illinois St. Chicago, Illinois 60610

Mayor Garry Genova Calumer City, City Hall 204 F. Walt. Road Calume July, Illinois 60409

Mayor Erdreth A. Rundlett 14450 Mainstee Ave. Burnham, Illinois 60633

Burnham, Illinois 60633

Mawhi en Hamm 1401a Pain Avenue Dolton Tilinois 60419

Judy Evans. City Clerk 14014 Park Avenue Dolton, Illinois 60419

Mayor Huward Ripley, Jr. 328 West 142nd St. Riverdale, Illinois 60627

Jova - Frances Riveralle Willage Clerk

Calumet City Clerk P.C. son 1819 Calumet City, Illinois 60409

Calumet City Mayor P.O. Box 1519 Calumer Try. Illinois 60409



Marina Brynes JURE/FIPCO

9715 St. Van Vlissingen Road Chicat Clinois 60617

Joan Van Haren Calumet City Cares 307 Forsythe #12

Calumet City, Illinois 60409

Foster Milhouse

South Deering Association 12804 . Emphange Avenue Chicago, Illinois 60633-1224

Gordon Mayer P.C. Dom 45-808

Chicago, Illinois 60649

Robert Sheanan

18444 Ada Street Lans g, Illinois 60438

Kevin Greene

Center for Neighborhood Technology 2125 W. North Avenue

Chicago, Illinois 60647

Daniel Lee

161 East 121st Place Chicago, Illinois 60628

Valeria Johnson

13141 S. Langley

Chicago, Illinois 60627

Rosemann Dioric 10912 // Homie

Chicago, Illinois 60617

D'Andrea Adams

9529 S. Cliva+

Tom a linaw McMahon 639 E. 111th Street

Chicago, Illinois 60628

Shirley Fetrisna

Concerned ditizens of Burnham

14236 Greenbay Avenue

Burnham, Illinois 60633

Irms

ACORN

13387 S. Langley Ave.

Chicago Cllinois 60627

Maggy Fastle

ACORN

1143 E. LLIST ST.

Chicat. Julinois 60627

Hegewillin ommunity Committee

13245 Baltimore Avenue

Chicack, Illinois 60633

Sam I di:

Fair Elms Clvic Organization

10942 Avenue F

Chicad . Lilinois 60617

John Y ung

Avaion frains improvement Assn.

2710 East 127 Street

Chirm: . 1111nois 60633





Ed Borowski Avalon Trails Improvement Assn. 12917 Prondolet Ave. Chicag., Illinois 60633

614 East 112 Street Chicago Llinois 60628

Charlil Crav Greenpeace USA 417 South Dearborn St. Suite 120 Chicago, Illinois 60605-1120

South first Chicago Development Comm.

9204 Commercial, Suite 212
Chicago, Fllinois 60617

League 1 Women Voters of Illinois 33D First Michigan Avenue Chicago, Illinois 60604

East Side Chamber of Commerce MONTI communications, Inc. 365 East 106 Street Rural Route 16, Box 532 Chicage, Illinois 60617 Bloomington, Illinois 61704

Jim Amendola Lingu alssinger
Hegewisch Chamber of Commerce 9716 Sconev Hill Lane
13547 South Brandon Avenue Charictte, NS 28226 Chical Illinois 60633

Mike Pavion
South Chicago Chamber of Commerce
9204 Commercial Avenue
Chicago, Illinois 60617

Enviring Imporation
Attn: penations Manager
16435 South Center Avenue
Harvey Ellinois 60426

Calumet Area Industrial Commission
1000 East III Street
Chicago, Illinois 60628

Mary Ross
506 Madison Avenue
Garden Apartment
Oak Farm, Illinois

Harvey Sheldon Chicago Assn. of Commerce & Industry

3500 Three First National Plaza

Chicago, Illinois 60602

Chicago, Illinois 60602

Chicago, Illinois 60602

Chicago, Illinois 60602

Chicago, Illinois 60602

Chicago, Illinois 60602

Chicago, Illinois 60602

Chicago, Illinois 60602

Ms. Elleen Johnston Working Together to Manage Waste 505 Min a America 60091

Chuck Pregersen, President Edward ...len
Pullman Civit Organization 8138 River Drive
614 East 113 Street Morton Grove, Illinois 60093

Della Daniels-Fuqua Library, Olive-Harvey College 10000 - With Woodlawn Avenue Chica: Lilinois 60628

Garden Apartment Oak Farm, Illinois 60302

Ci.=



Braintree, MA 02184

A.C. Flantseid 444 Beavenere Court Canton, MT 48188

James R. Laubsted 124 Prairie Knoll Dr. Naperville, IL 60565

Nancy . . Roomich Feinberg 9515 E. Euclid Chicast II 60617

Maxine & Fran Rusdorf S.E. Sportsmens Club
113 Avenue J
Chicago, IL 60617

Charles & Wicki Jurka RR 3, E0x265A Goldonda, 1L 62938-9457

Esther Pala Resident 11608 Torrence Chicago, IL 60617

Bowden Quinn

Ollie Larter, Jr. New Directions 449 W. 115 Street Chicago II 60628



William J. Geary
Clean Harbors
Street
Braintree, MA 02184

George d. Libholas
Nicholas & Assoc., Inc.
32 Lynn Drive
Hawthorn West, IL 60047

Sulran Inc.
Attn: Dan Crawmer
Post Office Box 437
Chambaign, Illinois 61824-0437

American Euclogy Services, Inc. Attn: Richard M. Miller 127 East Suth Street New York, NY 10022

Sid Marder 217 East Adams Street Springfield, Illinois 62701

Barbars Mullarkey Waste ideam Network Post Office Box 946 Oak Parm, Ellinois 60303

Edwin misendrath Committee on Energy City Hall 121 North LaSalle Chicago, Illinois 60602

Michael Benn 230 Turrenden, Suite 407 Arlington, Virginia 22201

Chicago Legal Clinic Dorothy Gunn
2938 E. 91st Street Clerk. Pollution Control Bd.
Chicago, IL 60617 100 W. Randolph Street Ste 11-600 Chicago, IL 60601

Maria a conclant C-CET 14- a conclass Road Doiton IL asself

id minne

Calument deas ind. Commission 111 West Washington, Ste. 719 Chicag: 11 60602

Therese L. Lopez 12850 Marquette Avenue Chicago, IL 60637

Mara McGinnis Director's Actice Illimate Environmental Protection Agency Charles Loguille 1021 Mirth Grand Avenue East P.O. Sent 1:277 Springrielu. Illinois 62794-9276

US Arm Memb of Engineers 111 h. Lanal Street Chicago, Illinois 60606

Illing: Papartment of Natural Resources Office of Water Resource Management 524 . Second Springsiela, Illinois 62701-1787

Illinois Department of Agriculture Division of Natural Resources State Fairgrounds P.O. Box 19281 Springfield, Illinois 62794

Jack Parin Sierra 1 N. Basaile Street Suite 4242 Chicago, lillnois 60603

Lional Trepanier Chicago Greens 716 Maxwell Market Street Chicago Illimois 60607

Beatris L. Feltan 9521 .. Busild Avenue Chicar . 12 /0617

> Scott e: 333 E. Untario 902B Chicago Il (0611

32ma Lustrict Fair I m Time League 1112. Agenue 1 Chicago 11 40617

Jim Luwi-1109 Puran Alad Batavi II 90510

Mary Sumner 32nd District Environmental Task Toe 980: Avenue H Chicad , Il 30617

John Fatirin Southeast Environmental Task F br 1071: Whenke F Chicar: 11 00617

Deb Watson 13111 Amanua Chica = IL 50633

James ... Editaing
Lake Calumet Study Comittee 2135 W. Cortez Chicag: 11 60622

Maclini Souther Limitonmental Tas: F. L.

11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 60617 (773) 646-6202 • FAX (773) 646-6381 Visit our Website at www.cleanharbors.com

NOTICE

October 12, 1999

To: Facility Mailing List Addresses

Re: Clean Harbors Services, Inc.

Notification of RCRA Class 1 Permit Modification

Clean Harbors Services, Inc. (CHSI) is a permitted hazardous waste treatment, storage, and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHSI currently operates under a RCRA Part B permit issued by the IEPA on September 30, 1993.

On July 16, 1999 CHSI requested a Class 1 permit modification to allow CHSI to vent compressed gas cylinders of eight inert, non-RCRA hazardous, atmospheric gases to the atmosphere at the CHSI facility. This Class 1 modification does not require prior approval from IEPA.

On September 13, 1999 IEPA approved a Class 1* modification request dated April 5, 1999 to modify the Contingency Plan to take into account the possibility of a slope failure of the Paxton Landfill and its effect on the facility.

On October 8, 1999 CHSI requested a Class 1 permit modification to allow the use of one-time Land Disposal Restriction documentation for incoming and outgoing waste shipments and to update revised Land Disposal Restriction forms. This Class 1 modification does not require prior approval from IEPA.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations in 35 IAC 703.281(a)(2) which require CHSI to send a notice of the modification to all persons on the facility mailing list within 90 days after the change is put into effect or within 90 days after IEPA approval if prior approval is required.

If you have any further questions regarding this notice, please feel free to contact me at (773)646-6202.

Sincerely,

James R. Laubsted

fam W Junfited

CHSI Facility Compliance Manager

cc: Facility Mailing List



ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

1021 NORTH GRAND AVENUE EAST, P.O. BOX 19276, SPRINGFIELD, ILLINOIS 62794-9276

THOMAS V. SKINNER, DIRECTOR

217/524-3300

September 13, 1999

CERTIFIED MAIL P 344 305 952

Clean Harbors Services, Inc. Attn: Jim Laubsted 11800 South Stony Island Avenue Chicago, Illinois 60617

Re: 0316000051 -- Cook County Clean Harbors Services, Inc. ILD000608471 Log Nos. 16-M-32 RCRA Permit File

Dear Mr. Laubsted:

This letter is in response to the request for modification of your RCRA Part B identified in the above referenced log numbers. The Illinois EPA has taken the following action on your modification request:

Reference Log No. 16-M-32

The Illinois EPA has approved your Class 1* modification request dated April 5, 1999 to modify the contingency plan to take into account the possibility of a slope failure of the Paxton Landfill and its effect on this facility.

The Illinois EPA has reviewed the information contained in your submittal and has determined that Clean Harbors Services, Inc. (CHSI) may implement this modification. This determination is based upon our review of (1) the RCRA Part B Permit issued to CHSI, (2) the regulations [35 Ill. Adm. Code, Subtitle G] and (3) the information contained in your submittals. Operations must be conducted in accordance with the approved RCRA Part B permit originally issued to CHSI and all subsequent modifications to the Part B Permit.

Within 35 days after the notification of a final permit decision, the permittee may petition the Illinois Pollution Control Board to contest the issuance of the permit. The petition shall include a statement of the reasons supporting a review, including a demonstration that any issues raised in the petition, were previously raised during the public comment period. In all other respects, the petition shall be in accordance with the requirements for permit appeals as set forth in 35 Ill. Adm. Code Part 105. Nothing in this paragraph is intended to restrict appeal rights under Section 40(b) of the Environmental Protection Act (35 Ill. Adm. Code 705.212(a)).

Since no changes in the permit conditions have resulted from this modification, a revised permit has not been issued; only the cover page of the permit reflecting the approval of this modification is being sent to you. Pursuant to 35 Ill. Adm. Code 703.281(a)(2), a notice of the modification shall be sent to all persons on the facility mailing list, maintained by Illinois EPA per 35 Ill. Adm. Code 705.165(a)(4), and the appropriate units of the state and local government, as specified in 35 Ill. Adm. Code 705.163(a)(5). This notification must be made within ninety (90) days of the date of issuance of this letter. Attached, is the current mailing list which should be used.

Should you have any questions or comments regarding the above, please contact Mark A. Schollenberger, P.E. of my staff at 217/524-3307.

Sincerely,

Joyce L. Munie, P.E. Manager, Permit Section

Bureau of Land

JLM:MAS:bjh\963281S.WPD

cc: Hak Cho, USEPA Region 5
Illinois International Port District



ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

1021 NORTH GRAND AVENUE EAST, P.O. BOX 19276, SPRINGFIELD, ILLINOIS 62794-9276

Thomas V. Skinner, Director RCRA Log No. B-16

ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

HAZARDOUS WASTE MANAGEMENT RCRA PART B PERMIT

IEPA #0316000051 -- Cook County USEPA ILD #000608471 Chicago/Clean Harbors Services, Inc. Permit Log Nos. B-16-M-32

RCRA -- Part B - Permit File

Illinois International Port District 3600 East 95th Street 95th & the Lakefront Chicago, Illinois 60617-5193 Issue Date: September 30, 1993 Effective Date: November 4, 1993 Expiration Date: November 4, 2003

Modification Date: September 13, 1999

Clean Harbors Services, Inc. 11800 South Stony Island Avenue Chicago, Illinois 60617

A Part B Permit Modification is hereby granted pursuant to the Resource Conservation and Recovery Act (RCRA), Illinois Environmental Protection Act, and Title 35 Ill. Adm. Code Parts 702, 703, 705, and 720 through 729 to Clean Harbors Services, Inc. and the Illinois International Port District (herein known as the Permittee(s)) to modify their existing permit to construct, maintain and operate a waste management facility involved in the treatment and storage of hazardous waste. The site is located at 11800 South Stony Island Avenue in Chicago, Illinois.

This permit modification consists of the conditions contained herein (including those in any attachments and appendices) and applicable regulations contained in the Illinois Environmental Protection Act and Title 35 Ill. Adm. Code Parts 702, 703, 705 and 720 through 729 in effect on the effective date of this permit. The Environmental Protection Act ("Act") Ill. Rev. Stat., Ch. 111-1/2, par. 1039 grants the Illinois Environmental Protection Agency the authority to impose conditions on permits which are issued. This draft permit contains 253 pages including Attachments A through K.

If you have any questions regarding this permit, please contact Mark A. Schollenberger, P.E. at 217/524-3300.

Sincerely,

Joyce L. Murie, P.E. Manager, Permit Section

Bureau of Land

JLM:MAS:bjh\963281S.WPD

cc: Hak Cho, USEPA Region 5

NOTICE



DIVISION FRONT OFFICE Waste, Pesticides & Toxics Division U.S. EPA – REGION 5

June 19, 1997

To: Facility Mailing List Addresses

Re: Clean Harbors Services, Inc.

Notification of RCRA Class 1 Permit Modification

Clean Harbors Services, Inc. (CHSI) is a permitted hazardous waste treatment, storage, and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHSI currently operates under a RCRA Part B permit issued by the IEPA on September 30, 1993.

On February 14, 1997 CHSI requested a class 1* permit modification to add hydrogen sulfide cylinders as an acceptable cylinder to handle at the facility. Although CHSI was already permitted to receive hazardous waste code U135 (hydrogen sulfide), the facility Compressed Gas Operating Procedures did not list hydrogen sulfide as a compressed gas which could be received. The IEPA approved this Class 1* modification on April 15, 1997.

On March 21, 1997 CHSI requested a Class 1 permit modification to modify the location of the emergency spill equipment locker contents to a centralized location in the control building. The IEPA approved this Class 1 modification request June 10, 1997.

On April 1, 1997 CHSI requested a Class 1 permit modification to designate a new alternate emergency coordinator in the facility's Contingency Plan. The IEPA approved this Class 1 modification request June 10, 1997.

On April 24, 1997 CHSI requested a Class 1 permit modification to relocate a conveyor motor located in the Pegasus fuel blending unit. The motor was relocated 18 inches vertically from below the conveyor to above the conveyor. This Class 1 modification request does not require prior IEPA approval.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations in 35 IAC 703.281(a)(2) which require CHSI to send a notice of the modification to all persons on the facility mailing list within 90 days after the change is put into effect or within 90 days after IEPA approval if prior approval is required.

If you have any further questions regarding this notice, please feel free to contact me at (773)646-6202.

Sincerely,

James R. Laubsted

m N. Janfoted

CHSI Facility Compliance Manager

11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 60617 (773) 646-6202 • FAX (773) 646-6381 Visit our Website at www.cleanharbors.com

NOTICE

June 4, 1999

To: Facility Mailing List Addresses

Re: Clean Harbors Services, Inc.

Notification of RCRA Class 1 Permit Modification

Clean Harbors Services, Inc. (CHSI) is a permitted hazardous waste treatment, storage, and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHSI currently operates under a RCRA Part B permit issued by the IEPA on September 30, 1993.

On March 15, 1999 CHSI requested a Class 1 permit modification to reflect the current status (proposed versus existing) of container storage and tank system units at the CHSI facility. Those units which have been built since permit approval will now be classified as existing on the permit. This Class 1 modification does not require prior approval from IEPA.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations in 35 IAC 703.281(a)(2) which require CHSI to send a notice of the modification to all persons on the facility mailing list within 90 days after the change is put into effect or within 90 days after IEPA approval if prior approval is required.

If you have any further questions regarding this notice, please feel free to contact me at (773)646-6202.

Sincerely,

Jámes R. Laubsted

ĆHSI Facility Compliance Manager

cc: Facility Mailing List

Southtown Economist Aten: News Desk 5959 S. Harlem Avenue Chicago, Illinois 60638

The Times
Attn: News Desk
Post Office Box 5553
2 River Place Mall, Suite I
Lansing, Illinois 60438

Chicago Tribune Attn: News Desk 435 North Michigan Avenue Chicago, Illinois 60611

Chicago Sun-Times Attn: News Desk 401 North Wabash Chicago, Illinois 60611

Star Publications
Attn: News Desk
15 Otto Blvd.
Chrcago Heights, Illinois 60411

The Hegewisch Herald Attn: News Desk 13256 So. Baltimore Chicago, Illinois 60633

City News Bureau Attn: News Desk 35 E. Wacker Dr., Suite 792 Chicago, Illinois 60601

Hammond Times 601 45th Ave. Munster, IN 46321

WJOB Radio Attn: Public Service Director 6405 Olcott Avenue Hammond, Indiana 46320



WLS-TV

Attn: Public Service Director 190 N. State Chicago, Illinois 60601

WBEZ Radio

Attn: Public Service Director 105 W. Adams Chicago, Illinois 60602

MAQ/AMW

Attn: Public Service Director Merchandise Mart Plaza Chicago, Illinois 60654

Hak Cho, HRP-8J U.S. EPA - Region V RCRA Permitting Branch 77 West Jackson Boulevard Chicago, Illinois 60604

U.S. EPA-Region 5
Waste Mgmt/Technical Programs
At Juana Rojo HRP-8J
77 West Jackson
Chicago, Illinois 60604

The Honorable Richard Derbin United States Senator 525 S. 8th Street Springfield, Illinois 62703

The Honorable Peter Fitzgerald United States Senator 230 S. Dearborn, Suite 3900 Chicago, Illinois 60604

The Honorable Jessie Jackson, Jr. United States Representative 17926 S. Halsted Street Homewood, Illinois 60430

The Honorable Bobby L. Rush United States Representative 655 E. 79th Street Chicago, Illinois 60619 The Honorable Emil Jones Illinois State Senator 507 West 111th Street Chicago, Illinois 60628

The Honorable Donne E. Trotter Illinois State Senator 2954 E. 92nd Street Chicago, Illinois 60617

The Honorable Harold Murphy Illinois State Representative 2959 West 159th Street Markham, Illinois 60426

The Honorable Arline Fantin Illinois State Representative 523 Burnham Calumet City, Illinois 60409

The Honorable Constance A. Howard Illinois State Representative 8800 Cottage Grove Avenue Chago, Illinois 60619-6949

The Honorable Thomas Dart Illinois State Representative 10231 South Western Avenue Chicago, Illinois 60643

The Honorable Todd Stroger Illinois State Representative 8539 South Cottage Grove Chicago, Illinois 60619

The Honorable Monique D. Davis Illinois State Representative 1234 W. 95th Street Chicago, Illinois 60643

Chicago District Corps of Engineers Regulatory Functions Branch Attn: Tom Slowinski, Chief 219 S. Dearborn Chicago, Illinois 60604-1797 Jean Perrecone U.S. EPA - Region V Office of Public Affairs 77 West Jackson Boulevard Chicago, Illinois 60604

State's Attorney Richard Devine County Building, Room 402 118 N. Clark Street Chicago, Illinois 60602

IEPA - Division Manager of Land Pollution Control Maywood Regional Office 1701 First Avenue Maywood, Illinois 60153

State of Illinois Office of Attorney General Environmental Law Division 500 South 2nd Street Springfield, Illinois 62701

Time Warren
DENR
325 West Adams Street
Springfield, Illinois 62704

Ill. Historic Preservation Agency
Preservation Services
1 Old State Capitol Plaza
Springfield, Illinois 62701-1512

Illinois Dept. of Natural Resources Resource Management 600 North Grand Avenue West Springfield, Illinois 62706

Deanna Glosser Illinois Dept. of Conservation Division of Natural Heritage 524 South Second Street Springfield, Illinois 62701-1787

Illinois Dept. of Transportation Division of Water Resources DOT Administration Bldg. Room 339 ngfield, Illinois 62794



DENR 325 W. Adams St. Springfield, Illinois 62704

Illinois Department of Commerce and Community Affairs 620 East Adams Street Springfield, Illinois 62701

Illinois State Chamber of Commerce 215 East Adams Street Springfield, Illinois 62701

Juan Thomas Illinois Department of Public Health 4212 West St. Charles Road Bellwood, Illinois 60104

Dand Thomas
Hazardous Waste Research
& Information Center
1 East Hazelwood Drive
Champaign, Illinois 61820

Chief Ill. State Natural History Survey 607 East Peabody Champaign, Illinois 61820

Chief Illinois State Geological Survey 615 East Peabody Champaign, Illinois 61820

Illinois State Water Survey 2204 Griffith Drive Champaign, Illinois 61820 Jerry Grubman
Illinois ESDA
1 Heritage Plaza, Suite 8
7501 Lemont Road
Woodridge, Illinois 60602

John H. Stroger, President Cook County Board 118 N. Clark, Room 567 Chicago, Illinois 60602

County Clerk Cook County Board 118 N. Clark, Room 434 Chicago, Illinois 60602

Robert D. Roache Cook County Env'l. Control Maybrook Civic Center, Room 202 1500 Maybrook Dr. Maywood, Illinois 60153

Jack Hickey
County Sheriff - ESDA
14-1 S. Maybrook
Maywood, Illinois 60153

Mayor Richard Daley Chicago City Hall 121 N. LaSalle Chicago, Illinois 60602

City of Chicago Clerk Chicago City Hall 121 N. LaSalle Chicago, Illinois 60602

Tim Degnan, Director Intergovernmental Affairs City Hall, Room 603 121 N. LaSalle Chicago, Illinois 60602

John Pope, Alderman 10th Ward 3522 E. 106th Street Chicago, Illinois 60617 Alderman Robert Shaw 9th Ward 11004 S. Michigan Chicago, Illinois 60628-5642

Committee on Energy, Environmental Protection & Public Utilities 121 North LaSalle Chicago, Illinois 60602

City of Chicago Streets & Sanitation Attn: Joe Brett 2451 S. Ashland Chicago, Illinois 60608

Dr. Karen Scott Cook County Public Health Dept. 1500 S. Maybrook Maywood, Illinois 60153

Ms. Chris Flannery
County Public Health Dept.
1500 S. Maybrook
Maywood, Illinois 60153

Calumet Water Reclamation Plant 400 East 130th Street Chicago, Illinois 60628

Cecil Lue-Hing, Director Research & Development Metro Water Reclamation District 100 East Erie Chicago, Illinois 60611

Chicago Dept. of Health Attn: Roger Cieslik Bureau of Health Regulations 50 W. Washington, Room CL88 Chicago, Illinois 60602

City of Chicago Fire Dept. Attn: John M. Eversole Hazardous Incidents Team 55 W. Illinois St. Chicago, Illinois 60610 Mayor Jerry Genova Calumet City, City Hall 204 Pulaski Road Calumet City, Illinois 60409

Mayor Eldreth A. Rundlett 14450 Mainstee Ave. Burnham, Illinois 60633

Nancy Dobrowski, Village Clerk 14450 Manistee Ave. Burnham, Illinois 60633

Mayor Don Hart 14014 Park Avenue Dolton, Illinois 60419

Judy Evans, City Clerk 14 4 Park Avenue Dorton, Illinois 60419

Mayor Edward Kipley, Jr. 325 West 142nd St. Riverdale, Illinois 60627

Marceline H. Phalen Riverdale Village Clerk 325 West 142nd St. Riverdale, Illinois 60627

Calumet City Clerk
P.O. Box 1519
Calumet City, Illinois 60409

Calumet City Mayor P.O. Box 1519 Calumet City, Illinois 60409

Calumet Park Clerk 12409 South Throop Street Calumet Park, Illinois 60643 Cardmet Park Mayor 12409 South Throop Street Calumet Park, Illinois 60643

Anthony G. Ianello Executive Director Illinois International Port District 3600 E. 95th Street 95th and the Lakefront Chicago, Illinois 60617

Mary T. Ryan Waste Mangement, Inc. P.O. Box 1309 Calumet City, Illinois 60409

Tom Tomaszewski CID Processing Center Post Office Box 1296 Calumet City, Illinois 60409

Developing Communities Project La tta Augustine 13277 S. Riverdale Chicago, Illinois 60627

Hazel Johnson People for Community Recovery 13116 South Ellis Avenue Chicago, Illinois 60627

Virginia Cap H.O.P.E. 13031 Carondolet Chicago, Illinois 60633

UNO Attn: Mary Ellen Montes or Bruce Ornstein 2938 East 91 Street Chicago, Illinois 60617

Barack Obama
Calumet Area Religious Conference
351 East 113 Street
ago, Illinois

Marina Brynes CURE/PIPCO 9716 So. Van Vlissingen Road Chicago, Illinois 60617

Joan Van Haren Calumet City Cares 807 Forsythe #12 Calumet City, Illinois 60409

Foster Milhouse South Deering Association 10404 S. Oglesby Chicago, Illinois 60617

Gordon Mayer P.O. Box 49-808 Chicago, Illinois 60649

Robert Sheahan 1874 Ada Street Lansing, Illinois 60438

Kevin Greene Center for Neighborhood Technology 2125 W. North Avenue Chicago, Illinois 60647

Daniel Lee 161 East 121st Place Chicago, Illinois 60628

Valerie Johnson 13141 S. Langley Chicago, Illinois 60627

Rosemary Diorio 10912 S. Hoxie Chicago, Illinois 60617 D'Andrea Adams 9529 S. Clyde Chicago, Illinois 60617

Tom & Cindy McMahon 639 E. 111th Street Chicago, Illinois 60628

Shirley Petrisha Concerned Citizens of Burnham 14236 Greenbay Avenue Burnham, Illinois 60633

Irma Dixon ACORN 13387 S. Langley Ave. Chicago, Illinois 60627

Maggy Davis ACORN 1143 E. 131ST ST. Chicato, Illinois 60627

Hegewisch Community Committee 13248 S. Baltimore Avenue Chicago, Illinois 60633

Sam Falbo Fair Elms Civic Organization 10942 Avenue F Chicago, Illinois 60617

John Young Avalon Trails Improvement Assn. 2710 East 127 Street Chicago, Illinois 60633 Ed Borowski Avalon Trails Improvement Assn. 12917 Carondolet Ave. Chicago, Illinois 60633

Chuck Gregorsen, President Pullman Civic Organization 614 East 113 Street Chicago, Illinois 60628

Charlie Cray Greenpeace USA 847 West Jackson Blvd. Chicago, Illinois 60607

South East Chicago Development Comm. 9206 Commercial, Suite 212 Chicago, Illinois 60617

East Side Chamber of Commerce 36 East 106 Street Chamber 60617

Jim Amendola Hegewisch Chamber of Commerce 13547 South Brandon Avenue Chicago, Illinois 60633

Mike Pavich South Chicago Chamber of Commerce 9204 Commercial Avenue Chicago, Illinois 60617

Calumet Area Industrial Commission 1000 East 111 Street Chicago, Illinois 60608

Harvey Sheldon Chicago Assn. of Commerce & Industry 3500 Three First National Plaza Chicago, Illinois 60602 Ms. Eileen Johnston Working Together to Manage Waste 505 Maple Avenue Wilmette, Illinois 60091

Edward R. Allen 8135 River Drive Morton Grove, Illinois 60093

Della Daniels-Fuqua Library, Olive-Harvey College 10001 South Woodlawn Avenue Chicago, Illinois 60628

League of Women Voters of Illinois 332 South Michigan Avenue Chicago, Illinois 60604

MQCI Communications, Inc. Rull Route 16, Box 532 Bloomington, Illinois 61704

Linda Kissinger 9716 Stoney Hill Lane Charlotte, NC 28226

Envirite Corporation Attn: Operations Manager 16435 South Center Avenue Harvey, Illinois 60426

Mary Ross 506 Madison Avenue Garden Apartment Oak Park, Illinois 60302

Cheryl Frank
Lee News Service
Statehouse Press Room
ngfield, Illinois 62706

George W. Nicholas Nicholas & Assoc., Inc. 32 Lynn Drive Hawthorn Woods, IL 60047

Sulcon, Inc. Attn: Dan Crawmer Post Office Box 437 Champaign, Illinois 61824-0437

American Ecology Services, Inc. Attn: Richard M. Miller 127 East 59th Street New York, NY 10022

Sid Marder 215 East Adams Street Springfield, Illinois 62701

Bara Mullarkey Waste Ideas Network Post Office Box 946 Oak Park, Illinois 60303

Edwin Eisendrath Committee on Energy City Hall 121 North LaSalle Chicago, Illinois 60602

Michael Behm 2300 Clarendon, Suite 407 Arlington, Virginia 22201

Dorothy Gunn Clerk, Pollution Control Bd. 100 W. Randolph Street Ste 11-600 Chicago, IL 60601

Maria Michalski C-CEP 14406 Chicago Road On, IL 60419 William J. Geary Clean Harbors 1501 Washington Street Braintree, MA 02184

A.C. Granfield 1311 Hawkins Court St. Charles, IL 60174

James R. Laubsted Clean Harbors 424 Prairie Knoll Dr. Naperville, IL 60565

Nancy A. Kookich Feinberg 9516 S. Euclid Chicago, IL 60617

Magne & Fran Rusdorf S. Sportsmens Club 11312 Avenue J Chicago, IL 60617

Charles & Vicki Jurka 4622 W. 122nd Street Alsip, IL 60658

Esther Pala Resident 11608 Torrence Chicago, IL 60617

Bowden Quinn Chicago Legal Clinic 2938 E. 91st Street Chicago, IL 60617

Ollie Carter, Jr. New Directions 449 W. 115 Street ago, IL 60628 Beatrice L. Feltan 9522 S. Euclid Avenue Chicago, IL 60617

Scott Saef 333 E. Ontario 902B Chicago, IL 60611

Charles Logullo 32nd District Fair Elm Civic League 11129 Avenue C Chicago, IL 60617

Jim Doyle 1105 Fagan Road Batavia, IL 60510

Mary Sumner 3221 District Environmental Task Force 9809 Avenue H Chicago, IL 60617

John Pastirik Southeast Environmental Task Force 10716 Avenue F Chicago, IL 60617

Deb Watson 13122 Avenue O Chicago, IL 60633

James E. Landing Lake Calumet Study Comittee 2135 W. Cortez Chicago, IL 60622

Marian Byrnes Southeast Environmental Task Force 10100 S. Ewing ago, IL 60617 d Dillion Calument Areas Ind. Commission 111 West Washington, Ste. 719 Chicago, IL 60602

Theresa L. Lopez 12856 S. Marquette Avenue Chicago, IL 60637

Mara McGinnis #33 Office of Community Relations Illinois Environmental Protection Agency 1021 North Grand Avenue East P.O. Box 19276 Springfield, Illinois 62794-9276

US Army Corps of Engineers 111 N. Canal Street Chicago, Illinois 60606

Illinois Department of Natural Resources Office of Water Resource Management 5. S. Second Springfield, Illinois 62701-1787

Illinois Department of Agriculture Division of Natural Resources State Fairgrounds P.O. Box 19281 Springfield, Illinois 62794

Jack Darin Sierra Club 1 N. LaSalle Street Suite 4242 Chicago, Illinois 60603

Lionel Trepanier Chicago Greens 716 Maxwell Market Street Chicago, Illinois 60607



ENVIRONMENTAL SERVICES, INC.

1501 WASHINGTON STREET, P.O. BOX 850327 • BRAINTREE, MA 02185-0327 (781) 849-1800

Visit our Website at www.cleanharbors.com



VIA OVERNIGHT DELIVERY

November 3, 1998

United States Environmental Protection Agency Waste Management Division - Illinois RCRA Section 77 West Jackson Boulevard Chicago, IL 60604-3590

Re: Clean Harbors Services, Inc.
11800 South Stony Island Avenue
Chicago, IL
USEPA ID. Number ILD000608471
Class 1 Permit Modification Request
Newly Listed Waste Codes

Dear Sir or Madam:

Clean Harbors is pleased to submit this Class 1 Permit Modification Request for authority to manage six (6) newly listed hazardous wastes at its Clean Harbors Services, Inc. ("CHSI") facility.

The following two (2) newly listed wastes were finalized by USEPA on May 4, 1998 (63 FR 24596) and become effective on November 4, 1998:

- K140 Floor sweepings, off-specification product and spent filter media from the production of 2,4,6-tribromophenol.
- U408 2,4,6-tribromophenol discarded commercial chemical product, off-specification species, container residues and spill debris thereof.

The following four (4) newly listed wastes were finalized by USEPA on August 6, 1998 (63 FR 42110) and become effective on February 8, 1999:

- K169 Crude oil storage tank sediment from petroleum refining operations.
- K170 Clarified slurry oil storage tank sediment and/or in-line filter/separation solids from petroleum refining operations.



Page 2 Letter to USEPA-V November 3, 1998



- K171 Spent hydrotreating catalyst from petroleum refining operations, including guard beds used to desulfurize feeds to other catalytic units (not including inert support media).
- K172 Spent hydrorefining catalyst from petroleum refining operations, including guard beds used to desulfurize feeds to other catalytic units (not including inert support media).

Pursuant to 40 CFR 270.42(g), Clean Harbors is enclosing a revised Part A Permit Application to notify the Agency of CHSI's intent to manage the new waste codes. Within ninety (90) days of the effective date of these rules, CHSI will notify all persons on its mailing list of this Class 1 Permit Modification Request. In addition, within one hundred eighty (180) days of the effective date for these rules, Clean Harbors shall submit a Class 2 Permit Modification Request for final Agency approval.

If you have any questions concerning this matter, please contact me at 781-849-1800, extension 4049.

Sincerely,

Joseph A. Kotlinski

Vice President, Environmental, Health and Safety

Attachment

cc: E. Bakowski (IEPA)

J. Laubsted (CHSI)

	Please print or type with ELITE type (12 cha	aracters per inch) i	n the unshaded	areas only						GSA	No. 024	8-EPA-OT
	For EPA Regional Use Only	,	E									
		United S	tates Environm	ental Protect		Agency						
		Haz	washington zardous V	, DC 20460 Vaste P		nit						
	Data Bassicad		Applic									
ŀ	Date Received Month Day Year		Par									
		(Re	ad the Instruction		tartin							
	I. Installation's EPA ID Number (Mark ')	X' in the appropri	ate box)									
	A. First Part A Submission			Х в.	Part	t A Amer	ndment #					
	C. Installation's EPA ID Number		D. Secondar	y ID Numbe	er (If	applicat	ole)	<u> </u>	_			
	IL D00060847	1				_		_ <u>~_</u>			··· <u>-</u>	: -
	II. Name of Facility		· · · · · · · · · · · · · · · · · · ·									
	CLEAN HARBOR	S SER	VICES	SIN			SENERAL III CO	eas acres as a	on the second second second second second second second second second second second second second second second	Sent House =	anna	ONG COLUMN COLUMN
	III. Facility Location (Physical address	not P.O. Box or R	Route Number)									
	A. Street											
	11800 SOUTH S	STONY	ISLAN	A C	V E	, ,						
ļ	Street (Continued)									•		
												_
	City or Town				1	State	Zip Co	ode				
	CHICAGO	<u>:</u>				I L	60	6 1 7				
	County Code County Name											
-	COOK							ı				
-	B. Land Type C. Geographic Location (Enter code) LATITUDE (Degrees, M.		N I ÖNGIZI IDE	(Deames !	Miner	too & Soc	onds)	D. Faci	lity Exist	ence D	ate Year	
	S 4 1 4 0 0 4	· · · · · · · · · · · · · · · · · · ·	0 8 7		9 <i>111101</i> 0 4		Jonus)	0 7	2 9] 9	8 (
ļ	IV. Facility Mailing Address				77							
	Street or P.O. Box	The second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of th	The Association		A9904****	trott.	and the second second				<u> </u>	
	11800 SOUTH S	STONY	ISLA	N D A	V .	E						
	City or Town					State	Zip Co	ode				
	CHICAGO		<u></u>	· · · · · · · · · · · · · · · · · · ·		IL		6 1 7	ar ser e e		2.24.0.25	D 4 3 17 + 100
ļ	V. Facility Contact (Person to be conta	cted regarding w	aste activities	at facility)		Ş					7 12 14 14 14 14 14 14 14 14 14 14 14 14 14	
	Name (Last)	<u> </u>		(First)								
	LAUBSTED			JAM	E	S						
L	Job Title			Phone Nu	mbe	er (Area (Code and	d Number)		1	
	COMPLIANCE M	G R		773	-	6 4 6	<u> </u>	202	30.850 - N	.,		
	VI. Facility Contact Address (See instr											
	A. Contact Address Location Mailing Other B. Street or P.C	D. Box							<u> </u>			
	X											
	City or Town		• •			State	Zip Co	ode				
ſ												

					Form A _l	oproved, Ol	MB No. 2050-0034 E	xpires 10/31/99
Please print or type with ELITE type (12 characters per inch) in the EPA I.D. Number (Enter from page 1)	he uns	haded areas	onty	Secon				. 0248-EPA-OT
I L D O O O 6 O 8 4 7 1								
								TEL MANAGE
Name of Operator	- Sales 7 7	<u></u>	96 KW 121	1. <u>1.1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1.</u>	na sing na anala <u>s</u>	iii.		- MR 2211 1.1
CLEAN HARBORS SERVI	C E	SIN	С.					
Street or P.O. Box		<u> </u>						<u>-</u>
	T S	L A N I) A 1	7 F				
City or Town		DANI	, A	State	ZIP Code		_	
CHICAGO				I L	6 0 6	1 7		
CHICAGO		<u></u>						
		B. Operat	or Type	C. Cha	nge of Operat	or	Date Ch	anged
Phone Number (Area Code and Number)			,, ,		Indicator		Month Day	-
773-646-6202		P		Yes	No X			
VIII. Facility Owner (See Instructions)								
A. Name of Facility's Legal Owner					<u> </u>			_
CLEAN HARBORS SERVI	CE	SIN	С					
Street or P.O. Box								
11800 SOUTH STONY IS	LA	ND	VE					•
City or Town				State	ZIP Code			
C H I C A G O				ΙL	606	1 7		
					-			
		B. Owner	Туре	C. Cha	nge of Owner		Date Ch	•
Phone Number (Area Code and Number) 7 7 3 - 6 4 6 - 6 2 0 2		[7		Indicator	7	Month Day	Year
				Yes	No X			
IX. SIC Codes (4-digit, in order of significance)	15%			Market Brown				
Primary (Description)				(Descri	Secondary			
4 9 5 3 REFUSE SYSTEMS				1203011				
Secondary			·		Secondary			
(Description)				(Descri	iption)			
X. Other Environmental Permits (See instructions)								
X. Other Environmental Permits (See instructions) A. Permit Type (Enter code) B. Permit Number						escriptio	on	
A. Permit Type (Enter code) B. Permit Number B - 1 6						•	on	
A. Permit Type (Enter code) B. Permit Number R				IEPA USEPA	C. De RCRA PAR HSWA PEI	ГВ RMIT		
A. Permit Type (Enter code) B. Permit Number B - 1 6				IEPA USEPA IEPA	C. De	r B RMIT ERATIO	ONS)	

9 0 - E N

- 1 3 0 1

IEPA WATER POLLUTION CONTROL

Secondary ID Number (Enter from page 1)

I L D O O O 6 O 8 4 7 1

XI. Nature of Business (Provide a brief description)

Clean Harbors Services, Inc. (CHSI) offers a liquid industrial waste pretreament service. CHSI accepts hazardous and non-hazardous wastewaters which do not meet sewer discharge specifications. Through physical and chemical treatment, CHSI produces and effluent acceptable for sewer discharge and a dewatered sludge. The effluent is discharged into the Metropolitan Water Reclamation District of Greater Chicago sewer system and the sludge is shipped to properly-licensed offsite treatment and/or disposal facilities. CHSI also accepts hazardous and non-hazardous waste, which is stored in tanks and containers a subsuguently transferred to properly-licensed offsite treatment/and or disposal facilities.

XII. Process Codes and Design Capacities

- A. PROCESS CODE Enter the code from the list of process codes below that best describes each process to be used at the facility. Thirteen lines are provided for entering codes. If more lines are needed, attach a separate sheet of paper with the additional information. For "other" processes (i.e., D99, S99, T04 and X99), describe the process (including its design capacity) in the space provided in item XIII.
- B. PROCESS DESIGN CAPACITY For each code entered in column A, enter the capacity of the process.
 - 1. AMOUNT Enter the amount. In a case where design capacity is not applicable (such as in a closure/post-closure or enforcement action) enter the total amount of waste for that process.
 - 2. UNIT OF MEASURE For each amount entered in column B(1), enter the code from the list of unit measure codes below that describes the unit of measure used. Only the units of measure that are listed below should be used.
- C. PROCESS TOTAL NUMBER OF UNITS Enter the total number of units used with the corresponding process code.

PRO COD	CESS E	PROCESS	APPROPRIATE UNITS OF MEASURE FOR PROCESS DESIGN CAPACITY	PROC	CESS E PROCESS		APPROPRIATE UNITS OF MEASURE FOR PROCESS DESIGN CAPACITY	
D79 D80 D81 D82 D83 D99 S01 S02 S03 S04 S05 S06 S99 T01 T02 T03	Landfill Land Trn Ocean D Surface Other Di Storage; Contains (Barrel, I Tank Waste P Surface Drip Pac Contains Building Other St Treatme Tank	eatment bisposal Impoundment isposal er Drum, Etc.) ille Impoundment mentStorage torage nt: Impoundment tor	or Liters Per Day Acre-feet or Hectare-meter Acres or Hectares Gallons Per Day r Liters Per Day Gallons or Liters Any Unit of Measure Listed Below Gallons or Liters Gallons or Liters Cubic Yards or Cubic Meters Gallons or Liters Gallons or Liters Cubic Yards or Cubic Meters Gallons or Liters Cubic Yards or Cubic Meters Any Unit of Measure Listed Below Gallons Per Day or Liters Per Day Gallons Per Day or Liters Per Day Short Tons Per Hour; Metric Tons Per Hour; or Btu's Per Hour Gallons Per Day; Liters Per Day; Pounds Per Hour; Short Tons Per Hour; Kilograms Per Hour; Metric Tons Per Day; Metric Tons Per Hour; Short Tons Per Hour; Short Tons Per	T87 T88 T89 T90 T91 T92 T93 T94 X01 X02	Smelting, Melting, Or Refining Furnace Titanium Dioxide Chloride Process Oxidation Reactor Methane Reforming Furnace Pulping Liquor Recovery Furnace Combustion Device Used In The Recovery Of Sulfur Values From Spent Sulfuric Acid Halogen Acid Furnace Other Industrial Furnaces Listed in 40 CFR §260.10 Containment Building-Treatment Miscellaneous (Subpat Open Burning/Open Detonation Mechanical Processing	s n X):	Gallons Per Day; Liters Per Day; Pounds Per Hour; Short Tons Per Hour; Metric Tons Per Day; Metric Tons Per Hour; Short Tons Per Day; or Btu's Per Hour Cubic Yards or Cubic Meters Any Unit of Measure Listed Below Short Tons Per Hour; Metric Tons Per Hour; Short Tons Per Hour; Pounds Per Hour; or Kilograms Per Hour Gallons Per Day; Liters Per Day; Pounds Per Hour; Short Tons Per Day; Pounds Per Hour; Short Tons Per Day; Pounds Per Hour; Short Tons Per Day; Pounds Per Hour; Short Tons Per Day; Pounds Per Hour; Short	
T80 T81 T82 T83 T84 T85 T86	Boiler Cement Lime Kil Aggrega Phospha Coke Ov Blast Fu	n ate Kiln ate Kiln ven	Btu's Per Hour Gallons or Liters Gallons Per Day; Liters Per Day; Pounds Per Hour; Short Tons Per Hour; Kilograms Per Hour; Metric Tons Per Day; Metric Tons Per Hour; Short Tons Per Day; or Btu's Per Hour	X04 X99	Geologic Repository Other Subpart X		Tons Per Hour; Kilograms Per Hour; Metric Tons Per Day; Metric Tons Per Hour; Short Tons Per Day; or Btu's Per Hour Cubic Yards or Cubic Meters Any Unit of Measure Listed Below	

UNIT OF MEASURE	UNIT OF MEASURE CODE	UNIT OF MEASURE	UNIT OF MEASURE CODE	UNIT OF MEASURE	UNIT OF MEASURE CODE
Gallons	E U L H	Short Tons Per Ho Metric Tons Per H Short Tons Per Da Metric Tons Per D Pounds Per Hour Kilograms Per Ho	our W ny N ay S J	Cubic Yards Cubic Meters	

Secondary ID Number (Enter from page 1)

ILD000608471

XII. Process Codes and Design Capabilities (Continued)

EXAMPLE FOR COMPLETING ITEM XII (Shown in line number X-1 below): A facility has a storage tank, which can hold 533.788 gallons.

	ne		roce	ss	B. PROCESS DESIGN CAPACITY		C. Process	_			icial		
Nun	nber		Code list ab	ove)	1. Amount (Specity)	2. Unit Of Measure (Enter code)	Total Number Of Units		· ·	ise C	only		
Х	1	s	0	2	533.788	G	0 0 1						
	1	s	0	1	167,640 (3048 X 55-GAL. EQUIVALENT)	G	3048						
	2	S	0	1	300 (10 x 30 CUBIC YARDS EQUIVALENT)	Y	010						
	3	S	0	1	254,400 (TRANSPORTATION VEHICLES)	G	029						
	4	S	0	2	255,150 .	G	030						
	5	D	8	3	2,000,000	G	004					-	
	6	Т	0	1	A 200,000 .	U	001					·	
	7												
	8												
	9												
1	О												
1	1												
1	2				·								
1	3												

NOTE: If you need to list more than 13 process codes, attach an additional sheet(s) with the information in the same format as above. Number the lines sequentially, taking into account any lines that will be used for "other" processes (i.e., D99, S99, T04 and X99) in item XIII.

XIII. Other Processes (Follow instructions from item XII for D99, S99, T04 and X99 process codes)

_	ine		Proc		B. PROCESS DESIGN CAPACITY		C. Process	D. Description Of Process
(Ente	nber r #s in w/XII)	(Fron	Code n list a		1. Amount (specify)	2. Unit Of Measure (Enter code)	Total Number Of Units	
X	1	τ	0	4	•			In-situ Vitrification
	1	Т	0	4	12,000		001	TO4A: Treatment of DO02 liquid/solid mixtures in containers by removal of liquid
	2	T	0	4	- 3,000 .	υ	001	TO4B: Compaction of hazardous waste solids in containers
	3	Т	0	4	55 , 000 .	U	001	TO4C: Hazardous waste fuel blending
	4	Т	0	4	600 .	ט	010	TO4D: Stabilization/ fixation of hazardous waste in roll-off containers

EF	A I.D	. Nun	nber	(Ente	r from page 1)		Secondary	ID Number (Ent	er from p	oage	1)		
	ΙI	L D	0 (0 0	608471								
ΧI	. Pro	cess	Code	s an	d Design Capabilities (Continued)					54.0 30.0			
	E ga	XAM allon	PLE : s.	FOR (COMPLETING ITEM XII (Shown in line number)	K-1 below): A	facility has a s	storage tank, wh	ich can	hold	533.7	88	
	ne nber		Proce Code		B. PROCESS DESIGN CA	PACITY		C. Process			fficial		
Nui	iibei		r list ai		1. Amount (Specify)		2. Unit C Measur (Enter cod	e Number		Use (Jniy		
X	1	s	0	2	5	33.788	G	0 0 1					
	1												
	2					•							
	3					•				_			_
	4					•							
	5		ļ .						-	<u> </u>			_
	6					•							L
	7			<u> </u>		•							
	8							_					
	9												
1	0					•						·	
1	1												
1	2	<u> </u>							_	ļ			
1	3	<u> </u>											
	ab	ove.	Numi	need berth tem)	t to list more than 13 process codes, attach an e lines sequentially, taking into account any lin (III.	additional sho es that will be	eet(s) with the e used for "oth	information in t her" processes (i.e., D99,	, S99,	T04		
XII	I. Oth	1		_	Follow instructions from item XII for D99, S99,	T04 and X99 p	rocess codes			Altribation			25
	ne nber		Proce Code		B. PROCESS DESIGN CAPACITY	12 11=14.04	C. Process Total	D. De	scription	of F	roces	S	
-	r#s in w/XII)	(Froi	n list a	bove)	1. Amount (Specify)	2. Unit Of Measure (Enter code)	Number Of Units			_			
X	1	T	0	4		+		ln-s	itu Vitr if i	icatio	n		
	1	X	9	9	7,000.00	U	001	X99A: Cons					
								paint/pair material ι	it-rel	late a c	omp	act	or
	2												
		-											
	3					I							
	1				· · · · · · · · · · · · · · · · · · ·								
				,					_				
	4				·								

Secondary ID Number (Enter from page 1)

ILD000608471

XIV. Description of Hazardous Wastes

- A. EPA HAZARDOUS WASTE NUMBER Enter the four-digit number from 40 CFR, Part 261 Subpart D of each listed hazardous waste you will handle. For hazardous wastes which are not listed in 40 CFR, Part 261 Subpart D, enter the four-digit number(s) from 40 CFR, Part 261 Subpart C that describes the characteristics and/or the toxic contaminants of those hazardous wastes.
- B. ESTIMATED ANNUAL QUANTITY For each listed waste entered in column A estimate the quantity of that waste that will be handled on an annual basis. For each characteristic or toxic contaminant entered in column A estimate the total annual quantity of all the non-listed waste(s) that will be handled which possess that characteristic or contaminant.
- C UNIT OF MEASURE For each quantity entered in column B enter the unit of measure code. Units of measure which must be used and the appropriate codes are:

ENGLISH UNIT OF MEASURE	CODE	METRIC UNIT OF MEASURE	CODE
POUNDS	P	KILOGRAMS	Ŕ
TONS	Τ	METRIC TONS	М

If facility records use any other unit of measure for quantity, the units of measure must be converted into one of the required units of measure taking into account the appropriate density or specific gravity of the waste.

D. PROCESSES

1. PROCESS CODES:

For listed hazardous waste: For each listed hazardous waste entered in column A select the code(s) from the list of process codes contained in item XII A. on page 3 to indicate how the waste will be stored, treated, and/or disposed of at the facility.

For non-listed hazardous waste: For each characteristic or toxic contaminant entered in column A, select the code(s) from the list of process codes contained in item XII A. on page 3 to indicate all the processes that will be used to store, treat, and/or dispose of all the non-listed hazardous wastes that possess that characteristic or toxic contaminant.

NOTE: THREE SPACES ARE PROVIDED FOR ENTERING PROCESS CODES. IF MORE ARE NEEDED:

- 1. Enter the first two as described above.
- 2. Enter "000" in the extreme right box of item XIV-D(1).
- Enter in the space provided on page 7, Item XIV-E, the line number and the additional code(s).
- 2. PROCESS DESCRIPTION: If a code is not listed for a process that will be used, describe the process in the space provided on the form (D.(2)).

NOTE: HAZARDOUS WASTES DESCRIBED BY MORE THAN ONE EPA HAZARDOUS WASTE NUMBER - Hazardous wastes that can be described by more than one EPA Hazardous Waste Number shall be described on the form as follows:

- Select one of the EPA Hazardous Waste Numbers and enter it in column A. On the same line complete columns
 B, C and D by estimating the total annual quantity of the waste and describing all the processes to be used to treat,
 store, and/or dispose of the waste.
- In column A of the next line enter the other EPA Hazardous Waste Number that can be used to describe the waste.
 In column D(2) on that line enter "included with above" and make no other entries on that line.
- 3. Repeat step 2 for each EPA Hazardous Waste Number that can be used to describe the hazardous waste.

EXAMPLE FOR COMPLETING ITEM XIV (shown in line numbers X-1, X-2, X-3, and X-4 below) - A facility will treat and dispose of an estimated 900 pounds per year of chrome shavings from leather tanning and finishing operation. In addition, the facility will treat and dispose of three non-listed wastes. Two wastes are corrosive only and there will be an estimated 200 pounds per year of each waste. The other waste is corrosive and ignitable and there will be an estimated 100 pounds per year of that waste. Treatment will be in an incinerator and disposal will be in a landfill.

				EPA		B. ESTIMATED									D	. PRO	OCESS
_	ine mber		VAST	ARD E NO) .	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1) PR	OCE	ss c	ODE	S (En	ter d	ode)	,	(2) PROCESS DESCRIPTION (If a code is not entered in D(1))
X	1	K	0	5	4	900	Р	Τ	0	3	D	8	0		1		
X	2	D	0	0	2	400	P	T	0	3	D	8	0				
X	3	D	0	0	1	100	P	T	0	3	Ď	8	0				
X	4	D	0	0	2									Г	1		Included With Above

IL000608471

Secondary ID Number (Enter from page 1)

 		Ė	A. E	EPA		B. ESTIMATED	C. UNIT OF		•	:	<u></u>	- 1	িন্ধইত	26 J. C.	_		ESSES
	ne nber	и	HAZ /AST inter	EN) .	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1,) PR(OCE:	SS C	ODE	S (E	nter c	ode))	(2) PROCESS DESCRIPTION (If a code is not entered in D(1))
	1	D	0	0	1	15,000	T	S	0	1	S	0	2	T	0	4	ABCEFGH TO1A X99A
	2	D	0	0	2	5,000	T	S	0	1	S	0	2	T	0	4	ABCEFGH TO1A X99A
	3	D	0	0	3	5,000	T	S	0	1	S	0	2	T	0	4	ABCEFGH TO1A X99A
	4	D	0	0	4	5,000	T	S	0	1	s	0	2	T	0	4	ABCDEFGH TO1A X99A
	5	D	0	0	5	250	T	S	0	1	S	0	2	T	0	4	ABCDEFGH TO1A X99A
	6	D	0	0	6	250	T	s	0	1	s	0	2	Т	0	4	ABCDEFGH TO1A X99A
	7	D	0	0	7	250	T	S	0	1	S	0	2	T	0	4	ABCDEFGH TO1A X99A
	8	D	0	0	8	250	T	S	0	1	S	0	2	T	0	4	ABCDEFGH TO1A X99A
	9	D	0	0	9	250	T	S	0	1	S	0	2	T	0	4	ABCDEFGH TO1A X99A
1	0	D	0	1	0	250	T	S	0	1	S	0	2	T	0	4	ABCDEFGH TO1A X99A
1	1	D	0	1	1	250	T	S	0	1	S	0	2	T	0	4	ABCDEFGH TO1A X99A
1	2	D	0	1	2	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH X99A
1	3	D	0	1	3	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH X99A
1	4	D	0	1	4	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH X99A
1	5	D	0	1	5	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH X99A
1	6	D	0	1	6	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH X99A
1	7	D	0	1	7	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH X99A
1	8	D	0	1	8	15,000	T	S	0	1	S	0	2	T	0	4	ABCEFGH TO1A X99A
1	9	D	0	1	9	15,000	T	S	0	1	S	0	2	T	0	4	ABCEFGH TO1A X99A
2	0	D	0	2	0	15,000	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99A
2	1	D	0	2	1	15,000	T	s	0	-1	S	0	2	Т	0	4	ABCEFGH TO1A X99A
2	2	D	0	2	2	15,000	Ť	s	0	1	S	0	2	Т	0	4	ABCEFGH TO1A X99A
2	3	D	0	2	3	15,000	T	S	0	l	s	0	2	Т	0	4	ABCEFGH TOIA X99A
2	4	D	0	2	4	15,000	T	S	0	1	s	0	2	Т	0	4	ABCEFGH TO1A X99A
2	5	D	0	2	5	15,000	T	S	0	1	S	0	2	T	0	4	ABCEFGH TOIA X99A
2	6	D	0	2	6	15,000	T	S	0	1	S	0	2	Т	0	4	ABCEFGH TO1A X99A
2	7	D	0	2	7	15,000	T	s	0	1	s	0	2	T	0	4	ABCEFGH TOIA X99A
2	8	D	0	2	8	15,000	T	s	0	1	s	0	2	T	0	4	ABCEFGH TO1A X99A
2	9	D	0	2	9	15,000	T	s	0	1	s	0	2	T	0	4	ABCEFGH TO1A X99A
3	0	D	0	3	0	15,000	T	s	0	1	s	0	2	T	0	4	ABCEFGH TO1A X99A
3	1	D	0	3	1	15,000	T	s	0	1	s	0	2	Т	0	4	ABCEFGH X99A
3	2	D	0	3	2	15,000	T	s	0	1	s	0	2	T	0	4	ABCEFGH TO1A X99A
3	3	D	0	3	3	15,000	Т	s	0	1	S	0	2	T	0	4	ABCEFGH TO1A X99A

Secondary ID Number (Enter from page 1)

I L D O O O 6 O 8 4 7 1

			A. E			B. ESTIMATED	C. UNIT OF								D. P	ROC	ESSES	
	ne nber	W	HAZ AST nter	EN	D.	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1)) PR	OCE	ss c	ODE	S (E	nter d	ode)		(2) PROCESS DESCRIP (If a code is not entered in	
	1	D	0	3	4	15,000	T	s	0	1	S	0	2	Т	0	4	ABCEFGH TO1A	X99A
	2	D	0	3	5	15,000	T	s	0	1	S	0	2	Т	0	4	ABCEFGH TO1A	X99A
	3	D	0	3	6	15,000	Ť	s	0	1	S	0	2	Т	0	4	ABCEFGH TO1A	X99A
	4	D	0	3	7	15,000	T	S	0	1	S	0	2	Т	0	4	ABCEFGH TO1A	X99A
	5	D	0	3	8	15,000	T	S	0	1	S	0	2	T	0	4	ABCEFGH TO1A	X99A
	6	D	0	3	9	15,000	T	S	0	1	S	0	2	Т	0	4	ABCEFGH TO1A	X99A
	7	D	0	4	0	15,000	T	s	0	1	S	0	2	T	0	4	ABCEFGH TO1A	X99A
	8	D	0	4	1	15,000	T	s	0	1	S	0	2	T	0	4	ABCEFGH TO1A	X99A
	9	D	0	4	2	15,000	T	s	0	1	S	0	2	Т	0	4	ABCEFGH TO1A	X99A
1	0	D	0	4	3	15,000	T	S	0	1	S	0	2	Т	0	4	ABCEFGH TO1A	X99A
1	1	F	0	0	1	7,500	T	S	0	1	S	0	2	T	0	4	ABCEFGH TO1A	X99A
1	2	F	0	0	3	7,500	Т	s	0	1	s	0	2	Т	0	4	ABCEFGH TO1A	X99A
1	3	F	0	0	4	7,500	T	S	0	1	S	0	2	Т	0	4	ABCEFGH TO1A	X99A
1	4.	F	0	0	5	7,500	T	S	0	1	S	0	2	Т	0	4	ABCEFGH TO1A	X99A
1	5	F	0	0	6	1,000	T	S	0	1	S	0	2	Т	0	4	ABCDEFGH TO1A	X99A
1	6	F	0	0	7	1,000	T	S	0	1	S	0	2	Т	0	4	ABCDEFGH TO1A	X99A
1	7	F	0	0	8	1,000	T	S	0	1	S	0	2	T	0	4	ABCDEFGH TO1A	X99A
1	8	F	0	0	9	1,000	T	s	0	1	S	0	2	T	0	4	ABCDEFGH TO1A	X99A
1	9	F	0	1	0	1,000	T	s	0	1	S	0	2	Т	0	4	ABCDEFGH TO1A	X99A
2	0	F	0	1	1	1,000	T	S	0	1	S	0	2	Т	0	4	ABCDEFGH TO1A	X99A
2	1	F	0	1	2	1,000	T	S	0	1	S	0	2	Т	0	4	ABCDEFGH TO1A	X99A
2	2	F	0	1	9	1,000	T	S	0	1	S	0	2	Т	0	4	ABCDEFGH TO1A	X99A
2	3	F	0	2	0	1,000	T	S	0	1	S	0	2	T	0	4	ABEFGH	
2	4	F	0	2	1	1,000	T	S	0	ĩ	· S	0	2	T	0	4	ABEFGH	
2	5	F	0	2	2	1,000	T	S	0	1	·S	0	2	T	0	4	ABEFGH	
2	6	F	0	Ž	3	1,000	T	s	0	1	S	0	2	T	0	4	ABEFGH	
2	7	F	0	2	4	250	T	S	0	1	Ŝ	0	2	T	Õ	4	ABEFGH	
2	8	F	0	2	5	15,000	T	s	0	1	s	0	2	Т	0	4	ABEFGH	
2	9	F	0	2	6	1,000	T	s	0	1	S	0	2	T	0	4	ABEFGH	
3	0	F	0	2	7	1,000	T	s	0	1	S	0	2	T	0	4	ABEFGH	
3	1	F	Ó	2	8	1,000	T	s	0	1	S	0	2	Т	0	4	ABEFGH	
3	2	F	0	3	2	250	T	s	0	1	s	0	2	Т	0	4	ABEFGH	
3	3	F	0	3	4	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A

Secondary ID Number (Enter from page 1)

ILD000608471

		Π	A. EPA HAZARD			B. ESTIMATED	C. UNIT OF			<u> </u>					_	ROC	ESSES	
	ine nber	И	HAZ /AST inter	EN	0.	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1)) PR(DCE!	SS C	ODE	S (Er	iter o	ode)		(2) PROCESS DES (If a code is not ente	
	1	F	0	3	5	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	2	F	0	3	7	250	T	s	0	1	S	o	2	T	0	4	ABCEFGH	X99A
	3	F	0	3	8	250	T	s	0	1	S	0	2	Ţ	0	4	ABCEFGH	X99A
	4	F	0	3	9	15,000	T	s	0	1	s	0	2	T	0	4	ABCEFGH TO1A	X99A
	5	K	0	0	1	1,000	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	6	K	0	0	2	1,000	T	s	0	_1	S	0	2	T	0	4	ABCEFGH TO1A	X99A
	7	K	0	0	3	1,000	T	s	0	1	S	0	2	T	0	4	ABCEFGH TO1A	X99A
	8	K	0	0	4	1,000	T	s	0	1	S	0	2	Т	0	4	ABCEFGH TO1A	X99A
	9	K	0	0	5	1,000	T	s	0	1	S	0	2	T	0	4	ABCEFGH TO1A	X99A
1	0	K	0	0	6	1,000	T	s	0	1	S	0	2	T	0	4	ABCEFGH TO1A	X99A
1	1	K	0	0	7	1,000	T	S	0	1	S	0	2	T	0	4	ABCEFGH TO1A	X99A
1	2	K	0	0	8	1,000	T	s	0	1	S	0	2	T	0	4	ABCEFGH TO1A	X99A
1	3	К	0	0	9	2,500	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	4	К	0	1	0	2,500	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	5	K	0	1	1	2,500	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	6	K	0	1	3	100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	7	K	0	1	4	100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	8	K	0	1	5	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	9	K	0	1	6	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	0	К	0	1	7	250	T	s	0	1	S	0	2	T	Ó	4	ABCEFGH	X99A
2	1	K	0	1	8	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	2	к	0	1	9	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	3	К	0	2	0	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	4	К	0	2	1	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	5	К	0	2	2	250	T	S	0	1	Ś	0	2	T	0	4	ABCEFGH	X99A
2	6	K	0	2	3	2,500	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	7	K	0	2	4	2,500	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	8	К	0	2	5	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	9	К	0	2	6	250	Т	s	0	1	S	0	2	Т	0	4	ABCEFGH	х99А
3	0	ĸ	0	2	7	250	Т	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
3	1	К	0	2	8	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
3	2	K	0	2	9	100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
3	3	K	0	3	0	100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A

I L D O O O 6 O 8 4 7 1

XIV. Description of Hazardous Wastes (Continued)

Secondary ID Number (Enter from page 1)

				EPA		B. ESTIMATED	C. UNIT OF								D. P	ROC	ESSES	
	ne nber	и	HAZ /AS1 inter	EN	0.	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1,	PRO	CES	SS C	ODE:	S (Er	iter d	ode)	,	(2) PROCESS DESC (If a code is not enter	
	1	K	0	3	1	100	T	S	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	2	K	0	3	2	100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	3	K	0	3	3	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	4	K	0	3	4	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	5	K	0	3	5	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	6	K	0	3	6	2,500	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	7	K	0	3	7	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	8	K	0	3	8	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
i	9	K	0	3	9	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	0	K	0	4	0	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	1	K	0	4	1	100	T	S	.0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	2	K	0	4	2	2,500	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	3	K	0	4	3	2,500	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	4	К	0	4	4	2,500	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	5	K	0	4	5	2,500	T _.	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	6	К	0	4	6	2,500	T	s	0	1	S	0	2	T	0	4	ABCEFGH TO1A	X99A
1	7	K	0	4	7	2,500	T	s	0	1	Ş	0	2	T	0	4	ABCEFGH	X99A
1	8	K	0	4	8	2,500	T	s	0	1	S	0	2	Т	0	4	ABCEFGH TO1A	X99A
1	9	K	0	4	9	2,500	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	0	K	0	5	0	2,500	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	1	K	0	5	1	2,500	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	2	K	0	5	2	2,500	T	S	0	1	S	0	2	Т	0	4	ABCEFGH TO1A	X99A
2	3	K	0	6	0	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH TO1A	X99A
2	4	K	0	6	1	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH TO 1A	X99A
2	5	K	0	6	2	250	Ť	S	0	1	S	0	2	Т	0	4	ABCEFGH TO1A	X99A
2	6	К	0	6	9	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH TO1A	X99A
2	7	К	0	7	1	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	8	K	0	7	3	100	Ť	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	9	ĸ	0	8	3	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
3	0	ĸ	0	8	4	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
3	1	K	0	8	5	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
3	2	K	0	8	6	250	T	S	0	1	s	.0	2	Т	0	4	ABCEFGH TO1A	X99A
3	3	K	0	8	7	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH TO1A	X99A

Secondary ID Number (Enter from page 1)

I L D O O O 6 O 8 4 7 1

			A. E			B. ESTIMATED	C. UNIT OF								D. Pl	ROC	ESSES	
	ine nber	и	HAZ VAST Enter	EN	0.	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1,) PRO	CES	SS C	ODE	S (En	iter c	ode)		(2) PROCESS DE	
	1	K	0	8	8	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	2	K	0	9	0	250	T	S	0	1	S	_0	2	T	0	4	ABCEFGH	X99A
	3	K	0	9	1	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	4	K	0	9	3	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	5	K	0	9	4	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	6	K	0	9	5	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	7	K	0	9	6	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	8	K	0	9	7	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	9	K	0	9	8	100	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	0	K	0	9	9	100	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	1	K	1	0	0	250	T	S	.0	1	S	0	2	T	0	4	ABCEFGH TO1A	X99A
1	2	K	1	0	1	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	3	K	1	0	2	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	4	K	1	0	3	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	5	К	1	0	4	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	6	К	1	0	5	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	7	K	1	0	6	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	8	K	1	0	7	15,000	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	9	K	1	0	8	15,000	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	0	K	1	0	9	15,000	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	1	K	1	1	0	15,000	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	2	K	1	1	1	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	3	K	1	1	2	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	4	K	1	1	3	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	5	К	1	1	4	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	6	К	1	1	5	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	7	K	1	1	6	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	8	К	1	1	7	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	9	ĸ	1	1	8	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
3	0	K	1	2		250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
3	1	K	1	2		250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
3	2	К	1	2	Ε	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
3	3	K	1	2	-	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A

Secondary ID Number (Enter from page 1)

ILD000608471

				El			B. ESTIMATED	C. UNIT OF								D. P	ROC	ESSES	
_	ine nber		HA VAS Ente	TE	N) .	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1)	PRO	CES	ss c	DDE:	S (En	ter c	ode)		(2) PROCESS DESCRIPTIO (If a code is not entered in D	
_	1	K	1		3	1	15,000	T	s	0	1	s	0	2	Ţ	0	4	ABCEFGH X99A	
	2	K	+		3	2	15,000	T	s	0	1	S	0	2	Т	0	4	ABCEFGH X99A	1
	3	K	1		3	6	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH X99A	1
	4	K	1		4	1	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH X99	<u> </u>
_	5	K	1		4	2	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH X99	1
	6	K	1		4	3	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH X99	1
	7	K	1		4	4	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH X99	7
	8	K	1		4	5	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99A	4
	9	K		1	4	7	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99	<i>\</i>
1	0	K	1		4	8	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99A	<u> </u>
1	1	K	1		4	9	250	T	S	.0	1	S	0	2	T	0	4	ABCEFGH X99A	Ā
1	2	K	1		5	0	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99A	Ā
1	3	K	1		5	1	250	Ť	S	0	1	S	0	2	T	0	4	ABCEFGH X99	A.
1	4	P	0		0	1	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99	A
1	5	P	0		0	2	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99	A.
1	6	P	0		0	3	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99	4
1	7	P	0		0	4	100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH X99	A
1	8	P	0		0	5	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99	A
1	9	P	0		0	6	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99	A
2	0	P	0		0	7	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99	A
2	1	Р	О		0	8	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH X99	A
2	2	P	0	T	0		250	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99	A
2	3	P	0	T	1	0	250	Ť	S	0	1	S	0	2	T	0	4	ABCEFGH X99	A
2	4	Р	0	1	1	1	250	T	S	0	1	S	Ó	2	T	0	4	ABCEFGH X99	A
2	5	P	0	T	1	2	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH X99	A
2	6	P	0		1	3	250	Ť	s	0	1	S	0	2	Т	0	4	ABCEFGH X99	A
2	7	P	0	\uparrow	1	4	250	Т	s	0	1	s	0	2	T	0	4	ABCEFGH X99	A
2	8	P	0	\dagger	1	5	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH X99	A
2	9	Р	0	1	1	6	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH X99	A
3	0	P	0	†	1	7	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH X99	A
3	1	P	0	\dagger	1	8	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH X99	A
3	2	P	0	\dagger	2	0	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH X99	A
 3	3	╁	0	+	2		250	T	s	0	1	S	0	2	T	0	4	ABCEFGH X99	

I L D 0 0 0 6 0 8 4 7 1

Secondary ID Number (Enter from page 1)

				EPA		B. ESTIMATED	C. UNIT OF								D. P	ROC	ESSES	
_	ne nber	и	AST	ARD E No COO	0.	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1)	PRO	CES	is c	DDE	S (Er	nter c	ode)		(2) PROCESS E (If a code is not o	
	1	P	0	2	2.	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	2	P	0	2	3	250	T	s	0	1	S	q	2	T	0	4	ABCEFGH	X99A
	3	P	0	2	4	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	4	P	0	2	6	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	5	P	0	2	7	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	6	P	0	2	8	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	7	P	0	2	9	100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	8	P	0	3	0	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	9	P	0	3	1	100	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
1	0	P	0	3	3	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	1	Р	0	3	4	250	T	S	.0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	2	P	0	3	6	100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	3	P	0	3	7	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	4	P	0	3	8	100	T	S	0	ŀ	S	0	2	T	0	4	ABCEFGH	X99A
1	5	P	0	3	9	250	T	S	0	1	S	0	2	Ť	0	4	ABCEFGH	X99A
1	6	Р	0	4	0	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	7	Р	0	4	1	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
1	8	P	0	4	2	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	9	P	0	4	3	100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	0	P	0	4	4	250	T	s	0	1	s	0	Ž	T	0	4	ABCEFGH	X99A
2	1	P	0	4	5	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	2	Р	0	4	6	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	3	Р	0	4	7	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99Ã
2	4	P	0	4	8	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	5	P	0	4	9	100	Ť	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	6	P	0	5	0	100	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
2	7	P	0	5	1	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	8	P	0	5	4	100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	9	P	0	5	6	250	T	s	0	1	s		-	Т	\vdash	╁	ABCEFGH	X99A
3	0	P	0	5	7	100	T	s	0	1	s		-	T	0	╁	ABCEFGH	X99A
3	1	P	0	5	8	100	T	s	0	-	S		-	Т	0	4	ABCEFGH	X99A
3	2	\vdash	0	5	9	100	T	s	0	1	s	_	2	T	0	4	ABCEFGH	X99A
3	3	-	0	6	0		T	S	0	-	S	اٺ		T	0	4	ABCEFGH	X99A

I L D O O O 6 O 8 4 7 1

Secondary ID Number (Enter from page 1)

				PA ABO		B. ESTIMATED	C. UNIT OF								D. P	ROCI	ESSES	
	ne nber	И	HAZ /AST inter	EN) .	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1)	PRO	CES	ss c	ODE:	S (Er	nter d	ode)		(2) PROCESS I (If a code is not	
	1	P_	0	6	2	250	T	s	0	1	s	0	_2	T	0	4	ABCEFGH	X99A
	2	P	0	6	3	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	3	P_	0	6	4	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	4	P	0	6	5	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	5	P	0	6	6	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	6	P	0	6	7	100	T	Ş	0	1	Ş	0	2	Т	0	4	ABCEFGH	X99A
	7	P	0	6	8	100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	8	P	0	6	9	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	9	P	0	7	0	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	0	P	0	7	1	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	1	P	0	7	2	250	T	S	.0	1	S	. 0	2	T	0	4	ABCEFGH	X99A
1	2	P	0	7	3	100	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	3	P	0	7	4	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	4	P	0	7	5	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	5	P	0	7	6	250	T .	S	0	ì	S	0	2	T	0	4	ABCEFGH	X99A
1	6	P_	0	7	7	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	7	P_	0	7	8	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	8	P_	0	8	1	250	Ť	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	.9	P	0	8	2	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	0	P	0	8	4	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	1	P	0	8	5	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	2	P	0	8	. 7	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	3	P	0	8	8	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	4	Р	0	8	9	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	5	P	0	9	2	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	6	P	0	9	3	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	7	P	0	9	4	100	T	S	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
2	8	P	0	9	5	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
2	9	P	0	9	6	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
3	0	P	0	9	7	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
3	1	P	0	9	8	100	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
3	2	P	0	9	9	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
3	3	P	1		1	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A

Secondary ID Number (Enter from page 1)

ILD000608471

				EPA		B. ESTIMATED	C. UNIT OF								D. Pl	ROC	ESSES	
	ine nber	и	/AS7	ARD E No	0.	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1,) PR(CES	SS C	DDE:	S (Er	iter c	ode)		(2) PROCESS DESCRIPTI (If a code is not entered in	
	1	P	1	0	2	150	T	s	0	1	s	0	2	T	0	4	ABCEFGH X99)A
	2	P	1	0	3	100	T	s	0	1	S	Q	2	T	0	4	ABCEFGH X99)A _
	3	P	1	0	4	100	T	S	0	1	s	0	2	Т	0	4	ABCEFGH X99	 9A
	4	P	1	0	5	100	T	S	0	1	s	0	2	T	0	4	ABCEFGH X99)A
	5	P	1	0	6	100	T	S	0	1	s	0	2	T	0	4	ABCEFGH X99	9A
	6	P	1	0	8	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99	A _
	7	P	1	0	9	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH X99)A
	8	P	1	1	0	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99)A
	9	P	1	1	1	250	T.	s	0	1	S	0	2	T	0	4	ABCEFGH X99	9A
1	0	P	1	1	2.	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH X99	9A
1	1	P	1	1	3	250	T	S	.0	1	S	0	2	Т	0	4	ABCEFGH X99	9A
1	2	P	1	ı	4	250	T	S	0	1	S	0	2	T	Ó	. 4	ABCEFGH X99	9A
1	3	Р	1	1	5	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99	9A
1	4	P	1	1	6	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH X99	9A
1	5	P	1	1	8	250	Ť	S	0	1	S	0	2	T	0	4	ABCEFGH X99	9A
1	6	P	1	1	9	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH X99	9A
1	7	P	1	2	0	250	Т	s	0	1	S	0	2	T	0	4	ABCEFGH X99	9A
1	8	Р	1	2	1	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH X99	9A
1	9	P	1	2	2	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH X99	9A
2	0	P	1	2	3	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH X9	9A
2	1	U	0	0	1	250	T	S	0	1	S	0	2	Τ	0	4	ABCEFGH X9	9A
2	2	Ų	0	0	2	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH X9	9A
2	3	Ü	0	0	3	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH X9	9A
2	4	ט	0	0	4	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH X9	9A
2	5	U	0	0	5	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH X9	9A
2	6	Ü	0	0	6	100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH X9	9A
2	7	U	0	0	7	250	T	S	0	1	s	0	2	T	0	4	ABCEFGH X9	9A
2	8	υ	0	0	8	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH X9	9A
2	9	υ	0	0	9	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH X9	9A
3	0	บ	0	1	0	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH X9	9A
3	1	U	0	1	1	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH X9	9A
3	2	U	0	1	2	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH X9	9A
3	3	U	0	1	4	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH X9	9A

Secondary ID Number (Enter from page 1)

ILD000608471

				PA		B. ESTIMATED	C. UNIT OF								D. Pl	ROCI	ESSES	
	ne nber	и	HAZ /AS1 Inter	EN	O .	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1,) PR(OCES	ss c	DDE:	S (Er	nter c	ode)		(2) PROCESS D (If a code is not e	•
	1	U	0	1	5	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	2	U	0	1	6	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	3	U	0	1	7	100	T	S	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
	4	U	0	1	8	250	T	S	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
	5	Ü	0	1	9	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	6	U	0	2	0	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	7	U	0	2	1	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	8	U	0	2	2	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	9	ָט	0	2	3	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	0	U	0	2	4	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	1	U	0	2	5	250	T	s	.0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	2	U	0	2	6	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	3	Ü	0	2	7	250	T	s	0	1	S	O	2	T	0	4	ABCEFGH	X99A
1	4	บ	0	2	8	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	5	U	0	2	9	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	6	Ū	0	3	0	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	7	U	0	3	1	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	8	U	0	3	2	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	9	U	0	3	3	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	0	U	0	3	4	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	1	Ü	0	3	5	250	T	S	0	1	S	0	2	Ť	0	4	ABCEFGH	X99A
2	2	Ü	0	3	6	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	3	ΰ	0	3	7	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	4	ΰ	0	3	8	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	5	ט	0	3	9	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	6	U	0	4	1	250	T ·	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	7	U	0	4	2	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
2	8	U	0	4	3	250	Ť	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	9	U	0	4	4	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
3	0	U	0	4	5	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
3	1	U	0	4	6	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
3	2	117	0	4	7	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
3	3	U		4	8		T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A

EPA I.D. Number (Enter from page 1)

I L D 0 0 0 6 0 8 4 7 1

Secondary ID Number (Enter from page 1)

				PA		B. ESTIMATED	C. UNIT OF								D. Pl	ROC	ESSES	
	ne nber	и	/AST	ARD E No	0.	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1)	PRO	CES	ss co	DDES	S (Er	iter c	ode)		(2) PROCESS (If a code is not	DESCRIPTION entered in D(1))
	1	ប	0	4	9	250	T	s	0	1	S.	0	2	T	0	4	ABCEFGH	X99A
	2	U	0	5	0	250	T	s	0	1	S	q	2	T	0	4	ABCEFGH	X99A
	3	U	0	5	1	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	4	U	0	5	2	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	5	U	0	5	3	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	6	U	0	5	5	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	7	บ	0	5	6	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
	8	Ū	0	5	7	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	9	υ.	0	5	8	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	0	Ü	0	5	9	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	1	Ū	0	6	0	100	T	s	.0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	2	U	0	6	1	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	3	U	0	6	2	250	T	S	0	1	S	q		T	0	4	ABCEFGH	X99A
1	4	U	0		3	250	T	S	0	1	S	0	2	T	Ò	4	ABCEFGH	X99A
1	5	U	0		4	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	6	ΰ	0		6	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	х99А
1	7	U	0	6	7	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	8	ט	0	6	8	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	9	U	0	6	9	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	0	U	0	7	0	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	1	U	0	7	1	250	Т	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	2	U	0	7	2	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	3	U	0	7	3	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	4	U	0	7	4	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	5	U	0	7	5	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	6	U	0	7	6	250	T	s	0	1	s	-	_	T	0	4	ABCEFGH	X99A
2	7	U	n	7	7	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	8	IJ	0		8	250	T	s	0.	1	S	0	2	T	0	4	ABCEFGH	X99A
2	9	U	-	_	9	250	T	s	0	1	s		-	T	0	4	ABCEFGH	X99A
3	0	ט			0	250	T	s	0	1	s		_	T	0	4	ABCEFGH	X99A
3	1	ש	0	8	1	250	T	s	0	1	s		-	T	0	4	ABCEFGH	X99A
3	2	U	0	8	2	250	T	s	0	1-	s	-	-	T	0	4	ABCEFGH	X99A
3	3	U	0	8	3	250	T	s	0	-	S	 		T	0		ABCEFGH	X99A

Secondary ID Number (Enter from page 1)

ILD000608471

			A. E			B. ESTIMATED	C. UNIT OF								D. Pl	ROCE	ESSES	
	ne nber	И	HAZ VAST Enter	EN) .	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1)	PRO	CES	s c	DES	S (Er	iter c	ode)			DESCRIPTION entered in D(1))
	1	U	0	8	4	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	2	U	0	8	_5	250	T	s	0	1	s	q	2	T	0	4	ABCEFGH	X99A
	3	U	0	8	6	100	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	4	U	0	8	7	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
	5	U	0	8	8	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	6	U	0	8	9	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	7	U	0	9	Q	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	8	U	0	9	1	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	9	U	0	9	2	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	0	U	0	9	3	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	1	U	0	9	4	250	T	s	.0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	2	U	0	9	5	250	T	S	0	1	S	0	2	Ť	Ó	4.	ABCEFGH	X99A
1	3	U	0	9	6	250	T	S	0	1	S	Q	2	T	0	4	ABCEFGH	X99A
1	4	U	0	9	7	100	T	S	0	1.	S	0	2	T	0	4	ABCEFGH	X99A
1	5	U	0	9	8	250	Ţ	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	6	U	0	9	9	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	7	U	1	0	1	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	8	U	1	0	2	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	9	Ü	1	0	3	100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	0	U	1	0	5	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	1	U	1	0	6	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	2	U	1	0	7	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	3	U	1	0	8	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	4	U	1	0	9	250	T	s	0	1	S	0	2	Ī	0	4	ABCEFGH	X99A
2	5	U	1	1	0	-	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
2	6	U	1	1	1	100	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
2	7	U	1	1	2	250	T	s	0	1	S		_	Т	0	4	ABCEFGH	X99A
2	8	ט	1	1	3	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
2	9	ט	1	1	4	250	T	s	0	F	s	┝	╁─	T	0	├	ABCEFGH	X99A
3	0	บ	1	1	5	<u> </u>	T	s	0	 	s	-	\vdash	T	┿	├		X99A
3	1	บ	1	1	6		T	s	0	┢	s		╁	T	+ -	 	ABCEFGH	X99A
3	2	U	1	1	7	250	т	s	0		s	-	 	T	╁	₩	ABCEFGH	X99A
3	3	U	1	1	8	· · · · · · · · · · · · · · · · · · ·	T	s	├	├ ─	s	<u> </u>	}	T	┿	┼—	ABCEFGH	X99A

Secondary ID Number (Enter from page 1)

I L D O O O 6 O 8 4 7 1

				PA		B. ESTIMATED	C. UNIT OF								D. P	ROC	ESSES	
	ine nber	и	/AST	ARD E No	D. .	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1,) PR(DCES	SS C	ODE	S (Er	nter c	ode)		(2) PROCESS D (If a code is not e	
	1	U	1	1	9	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	2	υ	1	2	0	250	T	S	0	1	S	q	2	T	0	4	ABCEFGH	X99A
	3	U	1	2	1	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	4	U	1	2	2	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	5	U	1	2	3	100	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	6	บ	1	2	4	250	T	S	Ō	1	S	0	2	T	0	4	ABCEFGH	X99A
	7	U	1	2	5	250	T	s	0	ı	S	0	2	T	0	4	ABCEFGH	X99A
	8	U	1	2	6	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	9	U	1	2	7	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	0	IJ	1	2	8	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	1	П	1	2	9	250	T	s	.0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	2	U	1	3	0	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	3	יט	1	3	1	250	T	S	0	1	S	Q	2	Т	0	4	ABCEFGH	X99A
1	4	U	1	3	2	250	T	S	0	1	s	0	2	T	0	4	ABCEFGH	X99A
1	5	U	1	3	3	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	6	U	1	3	4	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	7	U	1	3	5	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	8	U	1	3	6	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	9	Ü	1	3	7	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	0	Ū	1	3	8	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	1	Ŭ	1	4	0	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	2	U	1	4	1	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	3	U	1	4	2	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	4	U	1	4	3	100	T	S	Ő	1	S	0	2	Ť	0	4	ABCEFGH	X99A
2	5	U	1	4	4	100	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
2	6	U	1		5	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	7	ט	1		6	100	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
2	8	U	1	4	7	100	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
2	9	U	1		8	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
3	0	U	1	4	9	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	ХŸЎА
 3	1	U	1	5	0	100	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
3	2	U	1	5	1	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
— 3	3	U	1	5	2	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A

I L D O O O 6 O 8 4 7 1

Secondary ID Number (Enter from page 1)

					EPA ARE		B. ESTIMATED	C. UNIT OF								D. P	ROC	ESSES	
	ine mb		И	/AST	E No	0.	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1,) PR()CE	SS C	DDE:	s (Er	iter c	ode)		(2) PROCESS I (If a code is not	
	L	1	U	1	5	3	250	T	s	0	1	s	0	2	Ţ	0	4	ABCEFGH	X99A
	<u> </u>	2	ט	1	5	4	250	T	s	0	1	s	Q	2	T	0	4	ABCEFGH	X99A
	<u> </u> :	3	บ	1	5	5	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	<u></u> _'	4	U	1	5	6	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
] ;	5	U	1	5	7	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	1	6	U	1	5	8	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
		7	U	1	5	9	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	1	8	U	1	6	0	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
		9	U	1	6	1	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1		0	U	1	6	2	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	Ţ.	1	U	1	6	3	250	T	S	.0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	:	2	U	1	6	4	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	;	3	U	1	6	5	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	1	4	. ט	1	6	6	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1		5	U	1	6	7	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	1	6	U	1	6	8	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	7	7	11	1.	6	9	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	1	8	U	1	7	0	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	9	9	U	1	. 7	1	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	1	0	U	1	7	2	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	1	1	U	1	7	3	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	1	2	U	1	7	4	100	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	+	-	U	1	7		100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	1	4	U	1	7	7	100	T	s	0	ì	S	0	2	Ť	0	4	ABCEFGH	X99A
2	╁╌	5	υ	1	7	8	100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	1	6	U	1	7	9	100	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	+	7	.— U	1	8	0	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
2	+-	8	U	1		1	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
2	╁	9	U	1	8	2	250	Т	s	0	1	S	0	├─	Т	0	4	ABCEFGH	X99A
3	╁		U	1	8	3	250	T	s	0	1	s	0		Т	0	4	ABCEFGH	X99A
3	+	1	U	1	8		250	T	s	0	1	S	0	├─	T	0	4	ABCEFGH	X99A
3	┿	\dashv	Ū	1		5	250	T	s	0	1	S	0	├	Т	0	4	ABCEFGH	X99A
3	╁	_	บ	1	-	6	250	T	s	0	1	S		├	Т	0	4	ABCEFGH	X99A

Secondary ID Number (Enter from page 1)

ILD000608471

		A. EPA HAZARD				B. ESTIMATED	D. PROCESSES											
_	ne nber	и	HAZ /AST inter	EN	0.	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1,) PR(DCES	ss c	ODE:	S (Er	rter c	ode)		(2) PROCESS I (If a code is not	
	1	U	1	.8	7	250	T	S	0	1	s	0	2	T	0	4	ABCEFGH	X99 <u>A</u>
	2	U	1	8	8	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
	3	U	1	8	9	250	Т	s	0	1	S	0	_2	Т	0	4	ABCEFGH	X99A
	4	U	1	9	0	100	Ť	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
	5	Ū	1	9	1	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	X99A
	6	U	1	9	2	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	7	U	1	9	3	250	Ť	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	8	บ	1	9	4	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
	9	υ	1	9	6	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	0	U	1	9	7	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	1	U	2	0	0	250	T	s	.0	1	s	0	2	T	0	4	ABCEFGH	X99A
1	2	U	2	0	1	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	3	U	2	0	2	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	4	U	2	0	3	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	5	Ü	- 2	0	4	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	6	II.	2	0	5	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
1	7	U	2	a		250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	8	U	2	a	7	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
1	9	U	2	q	8	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	0	U	2	d	9	250	T	s	0	l	S	0	2	Т	0	4	ABCEFGH	X99A
2	1	U	2	1	0	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	2	Ü	2	1	1	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	3	U	-	1	3	. 250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	4	ט	2	1	4	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	5	U	2	1	5		T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	6	U		1	6	250	Ť	s	0	1	S	0	2	T	0	4	ABCEFGH	X99A
2	7	IJ	2	1	7	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH	X99A
2	8	U	-		8	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
2	9	U	2	1	9	250	T	s	0	1	S		-	Т	0	4	ABCEFGH	X99A
3	0	U	2	2	0	250	T	s	0	1	s		┝	T	0	4	ABCEFGH	X99A
3	1	Ū	2	2	1	250	T	s	0	1	S		-	T	0	├-	ABCEFGH	X99A
3	2	U	2	2	2	250	T	s	0	1	s	0	2	Т	0	4	ABCEFGH	X99A
	3	U			3		T	s	0	1	S	_	ļ	T	0	4	ABCEFGH	X99A

Secondary ID Number (Enter from page 1)

ILD000608471

				EPA		B. ESTIMATED	C. UNIT OF	D. PROCESSES											
	ine nber	и	HAZ VAST Enter	EN	0.	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1,	PRO	CES	SS C	DDES	S (En	ter c	ode)		(2) PROC (If a code i	ESS DES	CRIPTION ared in D(1))
	1	U	2	2	5	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH		X99A
	2	U	2	2	6	250	T	S	_0	1	S	0	2	T	0	4	ABCEFGH		X99A
	3	U	2	2	7	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH		X99A
_	4	U	2	2	8	250	T	s	0	1	S	0	2	Т	0	4	ABCEFGH		X99A
	5	บ	2	3	4	250	T	S	0	1	S	0	2	Т	0	4	ABCEFGH		X99A
	6	U	2	3	5	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH		X99A
	7	ט	2	3	6	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH		X99A
	8	U	2	3	7	250	T	s	0	ı	S	0	2	T	0	4	ABCEFGH		X99A
	9	U	2	3	8	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH		X99A
1	0	U	2	3	9	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH		X99A
1	1	U	2	4	0	250	T	S	.0	1	S	0	2	T	0	4	ABCEFGH		X99A
1	2	U	2	4	3	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH		X99A
1	3	U	2	4	4	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH		X99A
1	4	Ŭ	2	4	6	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH		X99A
1	5	U	2	4	7	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH		X99A
1	6	บ '	2	4	8	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH		X99A
1	7	U	2	4	9	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH		X99A
1	8	บ	3	2	8	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH		X99A
1	9	Ų	3	5	3	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH		X99A
2	0	U	3	5	9	250	T	S	0	ı	S	0	2	T	0	4	ABCEFGH		X99A
2	1	F	0	0	2	7,500	T	s	0	1	S	0	2	T	0	4	ABCEFGH	TOlA	X99A
2	2	K	0	6	4	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH		X99A
2	3	K	0	6	5	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH		X99A
2	4	K	0	6	6	250	T	S	0	1.	S	0	2	T	0	4	ABCEFGH		X99A
2	5	К	1	5	6	250	T	S	0	1	S	0	2	T	0	4	ABEFGH		X99A
2	6	K	1	5	7	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH		X99A
2	7	K	1	5	8	250	T	s	0	1	S	0	2	T	0	4	ABEFGH		X99A
2	8	К	1	5	9	250	Ť	s	0	1	s	0	2	Т	0	4	ABEFGH		X99A
2	9	К	1	6	0	250	T	s	0	1	s	0	2	Т	0	4	ABEFGH		X99A
3	0	к	1	6	1	250	T	s	0	1	S	0	2	T	0	4	ABEFGH		X99A
3	1	U	2	_	1	250	T	s	0	1	s	0	2	Т	0	4	ABEFGH		
3	2	U	2	7	7	250	T	s	0	1	s	0	2	T	0	4	ABEFGH		
3	3	U	2	7	8	250	T	s	0	1	s	0	2	T	0	4	ABEFGH		

Secondary ID Number (Enter from page 1)

ILD00060847.1

				EPA		B. ESTIMATED	D. PROCESSES										
_	ne nber	И	VAST	ARE FE N	0.	ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1) PR	OCE	SS C	ODE:	S (Er	iter c		(2) PROCESS DESCRIPTION (If a code is not entered in D(1))	
	1	บ	2	7	9	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
	2	U	2	8	0	250	T	s	0	1	s	0	2	Т	0	4	ABEFGH
	3	U	3	6	4	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH
	4	U	3	6	5	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH
	5	U	3	6	6	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH
	6	U	3	6	7	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
	7	ŭ	3	7	2	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
	8	U	3	7	3	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
	9	ט	3	7	5	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
1	0	บ	3	7	6	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
1	1	U	3	7	7	250	T	s	0	1	s	0	2	T	0	4	ABEFGH
1	2	U	3	7	8	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH
1	3	Ū	3	7	9	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH
1	4	Ū	3	8	1	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH
1	5	Ü	3	8	2	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
1	6	U	3	8	3	250	T	s	0	ì	S	0	2	Т	0	4	ABEFGH
1	7	U	3	8	4	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH
1	8	U	3	8	5	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
1	9	ט	3	8	6	250	T	s	0	1	s	0	2	Т	0	4	ABEFGH
2	0	U	3	8	7	250	T	s	0	1	s	0	2	Т	0	4	ABEFGH
2	1	U	3	8	9	250	T	s	0	1	s	0	2	Т	0	4	ABEFGH
2	2	U	3	9	0	250	T	s	0	1	s	0	2	Т	0	4	ABEFGH
2	3	U	3	9	1	250	T	s	0	1	s	0	2	Т	0	4	ABEFGH
2	4	U	3	9	2	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH
2	5	Ü	3	9	3	250	T	s	0	1	s	0	2	Т	0	4	ABEFGH
2	6	U	3	9	4	250	T	s	0	1	s	0	2	Т	0	4	ABEFGH
2	7	U	3	9	5	250	T	s	0	1	s	0	2	T	0	4	ABEFGH
2	8	U	3	9	6	250	T	s	0	1	s	0	2	Т	0	4	ABEFGH
2	9	U	4	0	0	250	T	s	0	1	s	0	2	T	0	4	ABEFGH
3	0	U	4	0	1	250	T	Б	0	1	s	0	2	Т	0	4	ABEFGH
3	1	U	4	0	2	250	T	Б	0	1	s	0	2	Т	0	4	ABEFGH
3	2	U	4	0	3	250	T	Б	0	1	s	0	2	T	0	4	ABEFGH
3	3	U	┼	0	4		T	5	0	1	s	0	2	T		4	ABEFGH

Secondary ID Number (Enter from page 1)

ILD000608471

			A. I			B. ESTIMATED C. UNIT OF		D. PROCESSES									
_	ne nber	И	HAZARD WASTE NO. (Enter code)			ANNUAL QUANTITY OF WASTE	MEASURE (Enter code)	(1,) PRO	DCE:	SS C	ODE	S (E	nter (ode,	,	(2) PROCESS DESCRIPTION (If a code is not entered in D(1))
	1	ซ	4	0	7	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
	2	U	4	0	9	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
	3	บ	4	1	0	250	T	S	0	1	S	0	2	T	0	4	ABEFGH
	4	U	4	1	1	250	T	s	0	1	s	0	2	T	0	4	ABEFGH
	5	P	1	2	7	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
	6	P	1	2	8	250	T	s	0	1	s	0	2	T	0	4	ABEFGH
	7	P	1	8	5	250	Т	s	0	1	S	0	2	Т	0	4	ABEFGH
	8	P	1	8	8	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
	9	P	1	8	9	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH
1	0	P	1	9	0	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH
1	1	P	1	9	1	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH
1	2	P	1	9	2	250	T	S	0	1	S	0	2	Т	0	4	ABEFGH
1	3	P	1	9	4	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
1	4	P	1	9	6	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH
1	5	Р	1	9	7	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH
1	6	Р	1	9	8	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
1	7	P	1	9	9	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH
1	8	P	2	0	1	250	T	S	0	1	S	0	2	Т	0.	4	ABEFGH
1	9	P	2	0	2	250	T	s	0	1	S	0	2	Т	0	4	ABEFGH
2	0	P	2	0	3	250	T	S	0	1	S	0	2	Т	0	4	ABEFGH
2	1	P	2	0	4	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
2	2	P	2	0	5	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
2	3	К	1	4	0	15,000	T	s	0	1	S	0	2	Ţ	0	4	ABCEFGHT01A
2	4	ט	4	0	8	15,000	T	s	0	1	S	0	2	Т	0	4	ABCEFGHT01A
2	5	К	1	6	9	15,000	T	s	0	1	S	0	2	Т	0	4	ABCEFGHT01A
2	6	K	1	7	0	15,000	T	s	0	1	S	0	2	Т	0	4	ABCEFGHT01A
2	7	K	1	7	1	15,000	T	s	0	1	S		2	Т	0	4	ABCEFGHT01A
2	8	К	1	7	2	15,000	T	s	0	1	S	0	2	Т	0	4	ABCEFGHT01A
2	9																
3	0																
3	1																
3	2																
3	3	T			Γ												

EPA I.D. Number (Enter from page 1)			Secondary ID Nur	nber (Enter from page 1)	
IL D000608471					
XV. Map					
Attach to this application a topographic map, or other boundaries. The map must show the outline of the fac structures, each of its hazardous waste treatment, sto Include all springs, rivers and other surface water bod	cility, the loca orage, or disp	ntion of each o cosal facilities,	f its existing and prop and each well where	osed intake and discharge it injects fluids undergrou	e
XVI. Facility Drawing					
All existing facilities must include a scale drawing of t	the facility (se	ee instructions	s for more detail).		
XVII. Photographs					
All existing facilities must include photographs (aerial storage, treatment and disposal areas; and sites of fut	l or ground-le ture storage,	evel) that clear treatment or c	ly delineate all existin disposal areas (see ins	g structures; existing structions for more detail).	•
XVIII. Certification(s)					
I certify under penalty of law that this document and all with a system designed to assure that qualified perso inquiry of the person or persons who manage the syst information submitted is, to the best of my knowledge penalties for submitting false information, including the	onnel properi tem, or those and belief, tr	ly gather and persons dire rue, accurate, a	evaluate the informat ctly responsible for g and complete. I am aw	ion submitted. Based on athering the information, vare that there are significate g violations.	my the
Owner Stonature	<u> 1 XJK e</u>	and the	L	//-3-98 Date Signed	
Name and Official Title (Type or print)					
Anthony G. Ianello, Exec	. Dir.,	Il Int'l	Port District		
Owner Signature				Date Signed	
Name and Official Title (Type or print)	_				
Operator Signature	الاه			Date Signed	
Name and Official Title (Type of Frint) Stephen E. Dovell	, Vice P	resident			
Operator Signature				Date Signed	•
Name and Official Title (Type or print)			<u></u> -L	· · · · · · · · · · · · · · · · · · ·	
XIX. Comments					
See	Attached	Sheet			
		_		_	
					•

					-

Note: Mail completed form to the appropriate EPA Regional or State Office. (Refer to instructions for more information)

Clean Harbors Services, Inc. EPA ID No. ILD000608471 Sheet 1 of 2

RCRA PART A FORM ADDITIONAL INFORMATION

Section VIII. Facility Owner

A. Name of Facility's Legal Owner

CHSI is the owner/operator of the hazardous waste facility. The land on which the facility is located is owned by the Illinois International Port District, a government entity.

Section XII. Process Codes and Design Capacity

Line 04. Disposal in Surface Impoundments (D83)

CHSI notes that the four (4) surface impoundments identified by this entry have been certified as closed by the IL EPA. The impoundments no longer accept hazardous waste, and currently operate under an approved Post Closure management plan. A list of the waste codes which were disposed in the impoundments is included in Appendix D-30 of the approved RCRA Part B Application.

Section_XIII. Additional Processes

Line 11. T04E - Treatment of D002 Liquids in Containers and Tanks

Treatment of D002 (Corrosive) liquid hazardous waste in containers and tanks by the commingling/mixing of compatible waste streams to adjust pH value. Process design capacity is 416,075 gallons per day in all tank or container systems at the facility.

Line 12. T04F - Treatment of Organic Peroxides in Containers

Treatment of organic peroxide hazardous waste in containers through the addition of water. Process design capacity is 5,000 gallons per day in any container at the facility.

Line 13. T04G - Treatment of Acid Cyanides in Containers

Treatment of acid cyanide hazardous waste in containers through pH adjustment using sodium hydroxide or other alkaline materials. Process design capacity is 5,000 gallons per day in any container at the facility.

Rev. November 2, 1998

Clean Harbors Services, Inc. EPA ID No. ILD000608471 Sheet 2 of 2

Line 14. T04H - Treatment of Hazardous Waste in Containers and Tanks Using Phase Separation

Treatment of hazardous waste in containers and tanks by phase separation using physical (e.g., gravity separation, filtration) and chemical (e.g., addition of demulsifiers) techniques. Process design capacity is 416,075 gallons per day in all tank or container systems at the facility.

Line 15. X99A - Consolidation of Hazardous Waste using a Compactor

Consolidation of hazardous waste paint and paint-related material contained in small metal and glass containers by processing through a can and glass compactor. Process design capacity of the unit is 7,000 pounds per day of cans of paint and paint-related material.

Section XIV. Description of Hazardous Waste

CHSI notes that Process Code "TO1A" in Column D(2) refers to the Listed Waste Treatment System identified on Line 06 in Section XII.

CHSI also notes that Process Codes "T04A" through "T04H" refer to the various container and/or tank treatment processes described in Lines 07 through 14 in Section XIII.



ENVIRONMENTAL SERVICES, INC.

11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 60617 (773) 646-6202 • FAX (773) 646-6381 Visit our Website at www.cleanharbors.com

NOTICE

January 5, 1998

Facility Mailing List Addresses

Clean Harbors Services, Inc. Re:

Notification of RCRA Class 1 Permit Modification

Clean Harbors Services, Inc. (CHSI) is a permitted hazardous waste treatment, storage, and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHSI currently operates under a RCRA Part B permit issued by the IEPA on September 30, 1993.

On October 14, 1998 CHSI requested a Class 1 permit modification to allow in-transit activities involving non-RCRA wastes in permitted RCRA units. CHSI was previously permitted to do in-transit activities involving RCRA wastes. This Class 1 modification does not require prior approval from IEPA.

On November 3, 1998 CHSI requested a Class 1 permit modification to manage six newly listed RCRA wastes which become effective November 4, 1998 and February 8, 1999. These wastes were previously non-RCRA. This Class 1 modification does not require prior approval, but will require a Class 2 modification within six months of the effective dates.

On November 16, 1998 CHSI requested a Class 1 permit modification to modify the facility's Contingency Plan by updating contact names, addresses and phone numbers for emergency response agencies. Class 1 modification does not require prior approval from IEPA.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations in 35 IAC 703.281(a)(2) which require CHSI to send a notice of the modification to all persons on the facility mailing list within 90 days after the change is put into effect or within 90 days after IEPA approval if prior approval is required.

If you have any further questions regarding this notice, please feel free to contact me at (773)646-6202.

James R. Laubsted CHSI Facility Compliance Manager

cc: Facility Mailing List



NOTICE

June 19, 1997

Facility Mailing List Addresses

Clean Harbors Services, Inc.

Notification of RCRA Class 1 Permit Modification

Clean Harbors Services, Inc. (CHSI) is a permitted hazardous waste treatment, storage, and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHSI currently operates under a RCRA Part B permit issued by the IEPA on September 30, 1993.

On February 14, 1997 CHSI requested a class 1* permit modification to add hydrogen sulfide cylinders as an acceptable cylinder to handle at the facility. Although CHSI was already permitted to receive hazardous waste code U135 (hydrogen sulfide), the facility Compressed Gas Operating Procedures did not list hydrogen sulfide as a compressed gas which could be received. The IEPA approved this Class 1* modification on April 15, 1997.

On March 21, 1997 CHSI requested a Class 1 permit modification to modify the location of the emergency spill equipment locker contents to a centralized location in the control building. The IEPA approved this Class 1 modification request June 10, 1997.

On April 1, 1997 CHSI requested a Class 1 permit modification to designate a new alternate emergency coordinator in the facility's Contingency Plan. The IEPA approved this Class 1 modification request June 10, 1997.

On April 24, 1997 CHSI requested a Class 1 permit modification to relocate a conveyor motor located in the Pegasus fuel blending unit. The motor was relocated 18 inches vertically from below the conveyor to above the conveyor. This Class 1 modification request does not require prior IEPA approval.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations in 35 IAC 703.281(a)(2) which require CHSI to send a notice of the modification to all persons on the facility mailing list within 90 days after the change is put into effect or within 90 days after IEPA approval if prior approval is required.

If you have any further questions regarding this notice, please feel free to contact me at (773)646-6202.

Sincerely,

James R. Laubsted

m N. Janfoted

CHSI Facility Compliance Manager

Mary A. Gade, Director

2200 Churchill Road, Springfield, IL 62794-9276

217/524-3300

June 10, 1997

CERTIFIED MAIL P 344 343 977

Clean Harbors Services, Inc. Attn: Jim Laubsted 11800 South Stony Island Avenue Chicago, Illinois 60617

ILD 000 608 471

Re: 0316000051 -- Cook County Clean Harbors Services, Inc.

ILD000608471

Log Nos. 16-M-22 and 16-M-23

RCRA Permit File

Dear Mr. Laubsted:

This letter is in response to the request for modification of your RCRA Part B identified in the above referenced log numbers. The Agency has taken the following action on your modification request:

Reference Log No. 16-M-22

The Agency has approved your Class 1 modification request dated March 21, 1997 to move the location of the emergency spill equipment lockers to a centralized location.

Reference Log No. 16-M-23

The Agency has approved your Class 1 modification request dated April 1, 1997 to designate a new alternate emergency coordinator.

The Agency has reviewed the information contained in your submittal and has determined that Clean Harbors Services, Inc. (CHSI) may implement this modification. This determination is based upon our review of (1) the RCRA Part B Permit issued to CHSI, (2) the regulations [35 Ill. Adm. Code, Subtitle G] and (3) the information contained in your submittals. Operations must be conducted in accordance with the approved RCRA Part B Permit originally issued to CHSI and all subsequent modifications to the Part B Permit.

Within 35 days after the notification of a final permit decision, the permittee may petition the Illinois Pollution Control Board to contest the issuance of the permit. The petition shall include a statement of the reasons supporting a review, including a demonstration that any issues raised in the petition, were previously raised during the public comment period. In all other respects, the

petition shall be in accordance with the requirements for permit appeals as set forth in 35 Ill. Adm. Code Part 105. Nothing in this paragraph is intended to restrict appeal rights under Section 40(b) of the Environmental Protection Act (35 Ill. Adm. Code 705.212(a)).

Since no changes in the permit conditions have resulted from this modification, a revised permit has not been issued; only the cover page of the permit reflecting the approval of this modification is being sent to you.

Should you have any questions or comments regarding the above, please contact Mark A. Schollenberger, P.E. of my staff at 217/524-3307.

Sincerely,

Edwin C. Bakowski, P.E. Manager, Permit Section

Bureau of Land

ECB:MAS\mls\972452.WPD

cc: Hak Cho, USEPA Region 5
Illinois International Port District

Mary A. Gade, Director

2200 Churchill Road, Springfield, IL 62794-9276

RCRA Log No. B-16

ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

HAZARDOUS WASTE MANAGEMENT RCRA PART B PERMIT

IEPA #0316000051 -- Cook County USEPA ILD #000608471 Chicago/Clean Harbors Services, Inc. Permit Log Nos. B-16-M-22 & -23 RCRA -- Part B - Permit File Issue Date: September 30, 1993 Effective Date: November 4, 1993 Expiration Date: November 4, 2003 Modification Date: June 10, 1997

Illinois International Port District 3600 East 95th Street 95th & the Lakefront Chicago, Illinois 60617-5193 Clean Harbors Services, Inc. 11800 South Stony Island Avenue Chicago, Illinois 60617

A Part B Permit Modification is hereby granted pursuant to the Resource Conservation and Recovery Act (RCRA), Illinois Environmental Protection Act, and Title 35 Ill. Adm. Code Parts 702, 703, 705, and 720 through 729 to Clean Harbors Services, Inc. and the Illinois International Port District (herein known as the Permittee(s)) to modify their existing permit to construct, maintain and operate a waste management facility involved in the treatment and storage of hazardous waste. The site is located at 11800 South Stony Island Avenue in Chicago, Illinois.

This permit modification consists of the conditions contained herein (including those in any attachments and appendices) and applicable regulations contained in the Illinois Environmental Protection Act and Title 35 Ill. Adm. Code Parts 702, 703, 705 and 720 through 729 in effect on the effective date of this permit. The Environmental Protection Act ("Act") Ill. Rev. Stat., Ch. 111-1/2, par. 1039 grants the Illinois Environmental Protection Agency the authority to impose conditions on permits which are issued. This permit contains 257 pages including Attachments A through K.

If you have any questions regarding this permit, please contact Mark A. Schollenberger, P.E. at 217/524-3300.

CBAD

Sincerely,

Edwin C. Bakowski, P.E. Manager, Permit Section

Bureau of Land


ECB:WRW:bjh\963281S.WPD



11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 60617 (312) 646-6202 • FAX (312) 646-6381

April 24, 1997

Mr. Mark A. Schollenberger, P.E. Illinois Environmental Protection Agency Bureau of Land - Permit Section 2200 Churchill Road P.O. Box 19276 Springfield, IL 62794-9276



Dear Mr. Schollenberger:

This letter is to provide documentation to the Illinois Environmental Protection Agency that The Illinois International Port District has reviewed the Clean Harbors Services, Inc.'s April 24, 1997 Class 1 Permit Modification Request to relocate a conveyor motor located in the Pegasus fuel blending unit.

As site owner of the property Clean Harbors Services, Inc. leases, the Illinois International Port District does not object to this Class 1 Permit Modification Request.

CERTIFICATION

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to be the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

James R. Laubsted

Jam H. Junftet

Facility Compliance Manager Clean Harbors Services, Inc. Anthony C. Janali

Anthony G. Ianello Executive Director Illinois International Port District Mary A. Gade, Director

2200 Churchill Road, Springfield, IL 62794-9276

217/524-3300

April 15, 1997

CERTIFIED MAIL P 344 343 926

Clean Harbors Services, Inc. Attn: Jim Laubsted 11800 South Stony Island Avenue Chicago, Illinois 60617

Re: 0316000051 -- Cook County Clean Harbors Services, Inc. ILD000608471 Log No. 16-M-21 RCRA Permit File

Dear Mr. Laubsted:

This letter is in response to the request for modification of your RCRA Part B identified in the above referenced log number. The Agency has taken the following action on your modification request:

Reference Log No. 16-M-21

The Agency has approved your Class 1* modification request dated March 17, 1997 to add hydrogen sulfide cylinders as an acceptable cylinder to handle at the facility.

The Agency has reviewed the information contained in your submittal and has determined that Clean Harbors Services, Inc. (CHSI) may implement this modification. This determination is based upon our review of (1) the RCRA Part B Permit issued to CHSI, (2) the regulations [35 Ill. Adm. Code, Subtitle G] and (3) the information contained in your submittals. Operations must be conducted in accordance with the approved RCRA Part B Permit originally issued to CHSI and all subsequent modifications to the Part B Permit.

Within 35 days after the notification of a final permit decision, the permittee may petition the Illinois Pollution Control Board to contest the issuance of the permit. The petition shall include a statement of the reasons supporting a review, including a demonstration that any issues raised in the petition, were previously raised during the public comment period. In all other respect the petition shall be in accordance with the requirements for permit appeals as set forth in 35 Ill. Adm. Code Part 105. Nothing in this paragraph is intended to restrict appeal rights under Section 40(b) of the Environmental Protection Act (35 Ill. Adm. Code 705.212(a)).

Since no changes in the permit conditions have resulted from this modification, a revised permit has not been issued; only the cover page of the permit reflecting the approval of this modification is being sent to you. Should you have any questions or comments regarding the above, please contact Mark A. Schollenberger, P.E. of my staff at 217/524-3307.

Sincerely,

Edwin C. Bakowski, P.E.

Manager, Permit Section

Bureau of Land

ECB:MAS\mls\972751.WPD

cc: Hak Cho, USEPA Region 5

Mary A. Gade, Director

2200 Churchill Road, Springfield, IL 62794-9276

RCRA Log No. B-16

ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

HAZARDOUS WASTE MANAGEMENT RCRA PART B PERMIT

IEPA #0316000051 — Cook County USEPA ILD #000608471 Chicago/Clean Harbors Services, Inc. Permit Log Nos. B-16-M-21 RCRA — Part B - Permit File Issue Date: September 30, 1993 Effective Date: November 4, 1993 Expiration Date: November 4, 2003 Modification Date: April 15, 1997

Illinois International Port District 3600 East 95th Street 95th & the Lakefront Chicago, Illinois 60617-5193 Clean Harbors Services, Inc. 11800 South Stony Island Avenue Chicago, Illinois 60617

A Part B Permit Modification is hereby granted pursuant to the Resource Conservation and Recovery Act (RCRA), Illinois Environmental Protection Act, and Title 35 Ill. Adm. Code Parts 702, 703, 705, and 720 through 729 to Clean Harbors Services, Inc. and the Illinois International Port District (herein known as the Permittee(s)) to modify their existing permit to construct, maintain and operate a waste management facility involved in the treatment and storage of hazardous waste. The site is located at 11800 South Stony Island Avenue in Chicago, Illinois.

This permit modification consists of the conditions contained herein (including those in any attachments and appendices) and applicable regulations contained in the Illinois Environmental Protection Act and Title 35 Ill. Adm. Code Parts 702, 703, 705 and 720 through 729 in effect on the effective date of this permit. The Environmental Protection Act ("Act") Ill. Rev. Stat., Ch. 111-1/2, par. 1039 grants the Illinois Environmental Protection Agency the authority to impose conditions on permits which are issued. This permit contains 257 pages including Attachments A through K.

If you have any questions regarding this permit, please contact Mark A. Schollenberger, P.E. at 217/524-3300.

Sincerely.

Edwin C. Bakowski, P.E. Manager, Permit Section

Bureau of Land

ECB:WRW:bjh\963281S.WPD

11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 60617 (312) 646-6202 • FAX (312) 646-6381

ILD000608471

April 1, 1997

Mr. Mark A. Schollenberger, P.E. Illinois Environmental Protection Agency Bureau of Land - Permit Section 2200 Churchill Road P.O. Box 19276 Springfield, IL 62794-9276

1997

Dear Mr. Schollenberger:

This letter is to provide documentation to the Illinois Environmental Protection Agency that The Illinois International Port District has reviewed the Clean Harbors Services, Inc.'s April 1, 1997 Class 1 Permit Modification Request to designate a new alternate emergency coordinator.

As site owner of the property Clean Harbors Services, Inc. leases, the Illinois International Port District does not object to this Class 1 Permit Modification Request.

CERTIFICATION

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to be the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

James R. Laubsted

an M Lufter

Facility Compliance Manager Clean Harbors Services, Inc.

aska Mil

Anthony G. Ianello
Executive Director
Illinois International
Port District

B-16-M-23



11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 60617 (312) 646-6202 • FAX (312) 646-6381

Certified Mail # Z781269848

April 1, 1997



Mr. Mark A. Schollenberger, P.E. Illinois Environmental Protection Agency Bureau of Land - Permit Section 2200 Churchill Road P.O. Box 19276 Springfield, IL 62794-9276

Dear Mr. Schollenberger:

Clean Harbors Services, Inc. (CHSI) is submitting a request for a Class 1 permit modification. This request is to designate a new alternate emergency coordinator. A copy of the revised Section G Table, Page 1 is enclosed.

If you have further questions or require any further information, please contact me at (773)646-6202.

Sincerely,

James R. Laubsted

Facility Compliance Manager

11 Julita

Coordinator/ Alternate

Address and Telephone Number

1. Primary Emergency Coordinator

James R. Laubsted, Compliance Manager Clean Harbors Services, Inc. 11800 S. Stony Island Avenue, Chicago, IL 60617 (773) 646-6202

Home Address:

24-hr emergency beeper: 1-800-884-4914

2. First Alternate

Gregory Jones, Operations Manager Clean Harbors Services, Inc. 11800 S. Stony Island Avenue, Chicago, IL 60617 (773) 646-6202

Home Address:

24-hr emergency beeper: 1-800-884-4914 (

3. Second Alternate

Chris Murphy, General Manager Clean Harbors Services, Inc. 11800 S. Stony Island Avenue, Chicago, IL 60617 (773) 646-6202

Home Address:

24-hr emergency beeper: 1-800-884-4914





11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 60617 (312) 646-6202 • FAX (312) 646-6381

Certified Mail # Z781269847

March 21, 1997

Mr. Mark A. Schollenberger, P.E. Illinois Environmental Protection Agency Bureau of Land - Permit Section 2200 Churchill Road P.O. Box 19276 Springfield, IL 62794-9276

Dear Mr. Schollenberger:

Clean Harbors Services, Inc. (CHSI) is submitting a request for a Class 1 permit modification. This request is to modify the location of the emergency spill equipment locker contents to a centralized location in the control building. The revised location is shown on CHCI Drawing 4221 Sheet 2 of 3.

If you have further questions or require any further information, please contact me at (773)646-6202.

Sincerely,

James R. Laubsted


Facility Compliance Manager

- W Tetto

RECEIV

MAR 2 5 1997

IEPA-BOL PERMIT SECTION

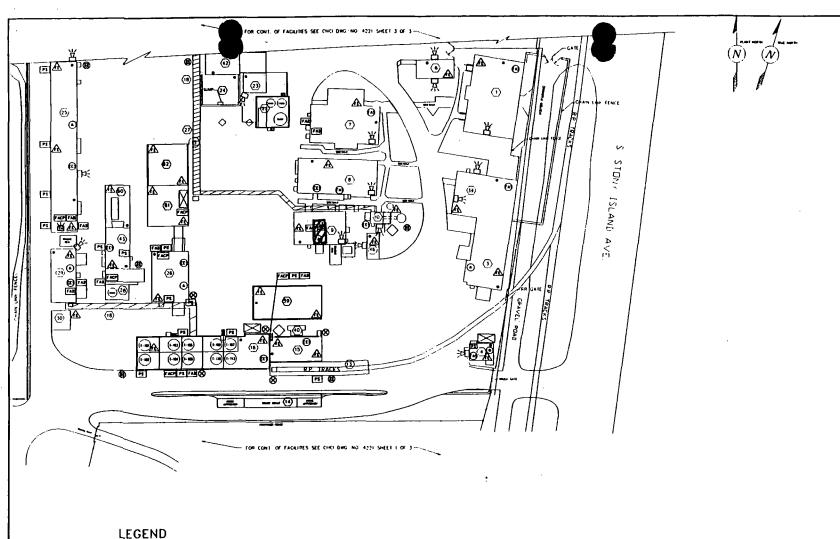

FIRE EXTINGUISHER (20 lbs. MULTIPURPOSE AMMONIUM PHOSPHATE)

0 FIRST AID STATION

0 EMERGENCY EYEVASH & SHOVER

ABSORBENT (FOR SPILL CONTROL)

 \Diamond FIRE EXTINGUISHER (150 tos. DRY CHEMICAL - PURPLE-K)

 \boxtimes SPILL EQUIPMENT LOCKER

TELEPHONE/INTERCOM WITH P/A CAPABILITY

P/A SPEAKER (CONNECTED TO ALL TELEPHONES)

• CELLULAR PHONE

ℯ

0

出

(3) PULL STATION

界 TROUBLE HORN

Î AB FIRE ALARM BELL

FACE FIRE ALARM CONTROL BOARD

8 FOAH FIRE SUPPRESSION HONITOR

FOAH FIRE SUPPRESSION MONITOR ON HYDRANT

DEMERCENCY EQUIPMENT STORAGE

SPILL EQUIPMENT LOCKER CONTENTS


H 11/ES - PER (CDA)
H PE CONTOTE ENDIT
H PE CONTOTE ENDIT
H PE CONTOTE ENDIT
H PE CONTOTE ENDIT
H PE CONTOTE ENDIT
H PE CONTOTE ENDIT
H PE CONTOTE ENDIT
H PE CONTOTE ENDIT
H PE CONTOTE ENDIT
H PE CONTOTE ENDIT
H PE CONTO

CHCI DWG. NO. 4221

BUILDING 39.

BUILDING DESCRIPTION

OFFICE BOX DANG
 MANNITHANKEE BOX DANG
 MANNITHANKEE BOX DANG
 MANNITHANKEE BOX DANG
 MANNITHANKEE BOX DANG
 FERROMENT, PORTON
 FERROMENT, PORTON
 FERROMENT, PORTON
 FERROMENT, PORTON
 FERROMENT, PORTON
 CONTROL BANDONG
 CONTROL BANDONG
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND
 MANNITHAND

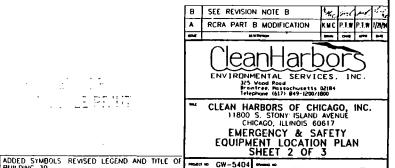

2916-C-25

B-16-11-22



11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 60617 (312) 646-6202 • FAX (312) 646-6381

March 20, 1997

Mr. Mark A. Schollenberger, P.E. Illinois Environmental Protection Agency Bureau of Land - Permit Section 2200 Churchill Road P.O. Box 19276 Springfield, IL 62794-9276

MAR 2 5 1997

Dear Mr. Schollenberger:

This letter is to provide documentation to the Illinois Environmental Protection Agency that The Illinois International Port District has reviewed the Clean Harbors Services, Inc.'s March 20, 1997 Class 1 Permit Modification Request to relocate the emergency response equipment located in the emergency response lockers to a centralized location in the operations center.

As site owner of the property Clean Harbors Services, Inc. leases, the Illinois International Port District does not object to this Class 1 Permit Modification Request.

CERTIFICATION

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to be the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

James R. Laubsted

Jam M Justo

Facility Compliance Manager Clean Harbors Services, Inc.

ask 1

Anthony G. Ianello Executive Director Illinois International Port District



11800 SOUTH STONY ISLAND AVENUE • CHICAGO, ILLINOIS 60617 (312) 646-6202 • FAX (312) 646-6381

March 17, 1997

Via FAX

Mr. Mark A. Schollenberger, P.E. Illinois Environmental Protection Agency Bureau of Land - Permit Section 2200 Churchill Road P.O. Box 19276 Springfield, IL 62794-9276

Dear Mr. Schollenberger:

Clean Harbors Services, Inc. (CHSI) is submitting additional information concerning the Class 1* permit modification to add hydrogen sulfide cylinders as an acceptable cylinder to handle at the facility. The original list of cylinders not acceptable was taken from a list of unacceptable cylinders at the Clean Harbors Natick, Massachusetts facility. The Natick facility permit was modified to allow acceptance of hydrogen sulfide gas. The current market necessitates the CHSI facility to modify its permit to accept hydrogen sulfide gas. The CHSI Part A currently lists hydrogen sulfide (U135) as an acceptable waste code. CHSI will handle hydrogen sulfide cylinders the same as other hazard class 2.3 poisonous, flammable gas cylinders which are acceptable at the facility (e.g., carbon monoxide). No other parts of the Compressed Gas Operating Procedures will be modified.

If you have further questions or require any further information, please contact me at (773)646-6202.

Sincerely,

James R. Laubsted

Facility Compliance Manager

W Infotal



11800 SOUTH STONY ISLAND AVENUE • CHICAGO, ILLINOIS 60617 (312) 646-6202 • FAX (312) 646-6381

Certified Mail #Z781269846

February 14, 1997

Mr. Mark A. Schollenberger, P.E. Illinois Environmental Protection Agency Bureau of Land - Permit Section 2200 Churchill Road P.O. Box 19276 Springfield, IL 62794-9276

Dear Mr. Schollenberger:

Clean Harbors Services, Inc. (CHSI) is submitting a request for a Class 1* permit modification. This request is to modify Appendices A and B of Clean Harbors Compressed Gas Operating Procedures submitted to the Agency September 1, 1995. The modification would remove hydrogen sulfide from the list of cylinders not acceptable at Clean Harbors and add hydrogen sulfide to the list of acceptable cylinders at Clean Harbors (Appendix B).

Hydrogen Sulfide (U135) is listed as an acceptable waste code on the CHSI Part A. Hydrogen Sulfide cylinders will be handled as are other poison gases listed as acceptable cylinders at the facility. No other parts of the Clean Harbors Compressed Gas Operating Procedures would be modified.

If you have any questions regarding this permit modification, please contact me at (773)646-6202.

Sincerely,

James R. Laubsted

Facility Compliance Manager

Julit of

B-16-CA-



ENVIRONMENTAL SERVICES, INC.

1501 WASHINGTON STREET, PO BOX 850327•BRAINTREE, MA 02185-0327 (617) 849-1800

WRITER'S DIRECT NUMBER Extension 4182 LAW DEPARTMENT (617) 849-1800 FAX (617) 356-1375

January 29, 1997

Illinois Environmental Protection Agency Attn: Edwin C. Bakowski, Manager Permit Section, Bureau of Land 2200 Churchill Road Springfield, Illinois 62794-9276

Re: 0316000051 - Cook County Clean Harbors Services, Inc. ILD000608471 Log No. 16

RCRA Permit

Dear Mr. Bakowski:

Clean Harbors Services, Inc. and its consultant, Carlson Environmental, Inc. (CEI) have reviewed the Agency's revised draft approval letter for the RFI Phase II/III Workplan. The revised draft was provided to us on January 24, 1997 by Tom Fiersten of your staff.

Clean Harbors has no comments on the revised draft and deems it acceptable. I pointed out to Mr. Fiersten during a telephone conversation earlier today that, while Clean Harbors will certainly strive to meet the schedule, the field work could be delayed due to the nesting schedule of the gulls on-site. I also advised Mr. Fiersten that once the conditional approval letter is received by Clean Harbors, it may be a good idea for myself and our consultant, Carlson Environmental, to meet with the Staff prior to initiation of field work.

Very truly yours

Jules B. Selden Senior Counsel FEB - 4 1997
PERMIT SECTION



ENVIRONMENTAL SERVICES, INC.

11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 60617 (773) 646-5111 • FAX (773) 646-0026

NOTICE

January 26, 1997

To: Facility Mailing List Addresses

Re: Clean Harbors Services, Inc.

Notification of RCRA Class 1 Permit Modification

Clean Harbors Services, Inc. (CHSI) is a permitted hazardous waste treatment, storage, and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHSI currently operates under a RCRA Part B permit issued by the IEPA on September 30, 1993.

On November 3, 1997 CHSI requested a Class 1 permit modification to change a pager number for the second alternate emergency coordinator in the facility's Contingency Plan. This Class 1 modification does not require prior approval from IEPA.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations in 35 IAC 703.281(a)(2) which require CHSI to send a notice of the modification to all persons on the facility mailing list within 90 days after the change is put into effect or within 90 days after IEPA approval if prior approval is required.

If you have any further questions regarding this notice, please feel free to contact me at (773)646-6202.

Sincerely,

James R. Laubsted

CHSI Facility Compliance Manager

cc: Facility Mailing List

a N. Jankt J

January 24, 1997



DIVISION FRONT OFFICE Waste, Pesticides & Toxics Division Notification of Class 1 Permit Modification U.S. EPA - REGION 5

Dear Interested Party:

Clean Harbors Services, Inc.

ILD 000 608 471

Clean Harbors Services, Inc. (CHSI) is a hazardous waste treatment, storage, and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHSI currently operates under a RCRA Part B permit issued by the IL Environmental Protection Agency (IEPA) on September 30, 1993.

On August 6, 1996 CHSI requested a Class 1 permit modification to change the legal name of the facility from "Clean Harbors of Chicago, Inc." to "Clean Harbors Services, Inc.". This name change was made solely for business/marketing reasons and does not reflect any change in ownership or operation of the facility. The IEPA approved the Class 1 modification request on November 8, 1996.

On August 15, 1996 CHSI requested a Class 1 permit modification to utilize the Flammable Storage #1 Bay of the Outside Storage Area (Unit R1) for drum receiving. This storage bay is to be used as a staging area. The IEPA approved the Class 1 modification request on November 8, 1996.

On October 17, 1996 CHSI requested a Class 1 permit modification to revise the facility's Contingency Plan to reflect the facility name change to Clean Harbors Services, Inc., to revise the emergency number to 911 for Police and Fire assistance, to add an additional nearby facility for incident notification, to revise the area code for the facility and applicable emergency response agencies, and to revise contact names for applicable emergency response agencies. The IEPA approved the Class 1 permit modification request on December 2, 1996.

On August 3, 1996 CHSI requested a Class 1 permit modification to designate a new alternate emergency coordinator and to reflect an area code for the emergency coordinator in the facility's Contingency Plan. The IEPA approved the Class 1 permit modification request on November 8, 1996.

On November 4, 1996 CHSI requested a Class 1 permit modification to designate a new alternate emergency coordinator in the facility's Contingency Plan. The IEPA approved the Class 1 permit modification request on December 2, 1996.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations at 35 IAC 703.281(a)(2) which require CHSI to send a notice of the modification to all persons on the facility mailing list within 90 days after the Agency approves the request.

January 24, 1997 Page 2

If you have any questions, please do not hesitate to contact me at (773) 646-6202.

Sincerely, M. Juttel

James R. Laubsted Facility Compliance Manager

cc: Facility Mailing List

B-16-11-19



Juana J

MOV 1 3 1996

11906 WEST WADSWORTH ROAD • WAUKEGAN, IL 60087 (708) 746-2090 • FAX (708) 746-2159

Certified Mail #Z781269823

November 6, 1996

Mr. Mark A. Schollenberger, P.E. Illinois Environmental Protection Agency Bureau of Land - Permit Section 2200 Churchill Road P.O. Box 19276 Springfield, IL 62794-9276

Dear Mr. Schollenberger:

This letter is to provide documentation to the Illinois Environmental Protection Agency that The Illinois International Port District has reviewed the Clean Harbors Services, Inc.'s November 4, 1996 Class 1 Permit Modification Request to designate a new Alternate Emergency Coordinator.

As site owner of the property Clean Harbors Services, Inc. leases, the Illinois International Port District does not object to this Class 1 Permit Modification Request.

CERTIFICATION

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to be the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Eric Gerstenberg Vice-President

HAT

Clean Harbors Services, Inc.

UDY All

Anthony G. Ianello Executive Director Illinois International Port District B-16-111-20



11906 WEST WADSWORTH ROAD • WAUKEGAN, IL 60087 (708) 746-2090 • FAX (708) 746-2159

Certified Mail # Z781269817

November 4, 1996

Mr. Mark A. Schollenberger, P.E.
Illinois Environmental Protection Agency
Bureau of Land - Permit Section
2200 Churchill Road
P.O. Box 19276
Springfield, IL 62794-9276

Re: Request for Class 1 Permit Modification RCRA Part B Log B-16 Clean Harbors Services, Inc.

Dear Mr. Schollenberger:

Clean Harbors Services, Inc. (CHSI) is pleased to submit one (1) original and two copies of a Class 1 Permit Modification to update the facility Contingency Plan.

CHSI is designating a new alternate emergency coordinator.

A copy of the revised Section G Table, Page 1 is enclosed.

CHSI shall in accordance with 35 IAC 703.281(a)(2), notify all persons on the facility's mailing list within 90 days.

If you have any further questions concerning this permit modification, please contact me at (773)646-6202.

Sincerely,

James R. Laubsted

Facility Compliance Manager

m H Jackte &

NOV 0.7 1996

Coordinator/ Alternate

Address and Telephone Number

1. Primary Emergency Coordinator

James R. Laubsted, Compliance Manager Clean Harbors Services, Inc. 11800 S. Stony Island Avenue, Chicago, IL 60617 (773) 646-6202

Home Address:

24-hr emergency beeper: 1-800-884-4914

2. First Alternate

Gregory Jones, Operations Manager Clean Harbors Services, Inc. 11800 S. Stony Island Avenue, Chicago, IL 60617 (773) 646-6202

Home Address:

24-hr emergency beeper: 1-800-884-4914

3. Second Alternate

Robert Sheahan, Wastewater Manager Clean Harbors Services, Inc. 11800 S. Stony Island Avenue, Chicago, IL 60617

(773) 646-6202

Home Address:

24-hr emergency beeper: 1-800-884-4914

B-16-m-19



11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 60617 (312) 646-6202 • FAX (312) 646-6381

Certified Mail #Z781269803

October 21, 1996

Mr. Mark A. Schollenberger, P.E. Illinois Environmental Protection Agency Bureau of Land - Permit Section 2200 Churchill Road P.O. Box 19276 Springfield, IL 62794-9276

Dear Mr. Schollenberger:

This letter is to provide documentation to the Illinois Environmental Protection Agency that The Illinois International Port District has reviewed the Clean Harbors Services, Inc.'s Class 1 Permit Modification Requests to:

- a) designate a new Alternate Emergency Coordinator and to reflect an area code change for the Emergency Coordinator
- b) modify the use of Flammable Storage Bay #1 (Unit R-1) to allow the receiving of waste in this unit
- c) change the name of the facility to Clean Harbors Services, Inc.
- d) revise the Contingency Plan to reflect the facility name change to Clean Harbors Services, revise the emergency number to 911 for Police or Fire assistance, to add an additional nearby facility for incident notification, revise the area code for the facility and applicable emergency response agencies, and revise contacts for applicable emergency response agencies

As site owner of the property Clean Harbors Services, Inc. leases, the Illinois International Port District does not object to these Class 1 Permit Modification Requests.



Mr. Mark A. Schollenberger, P.E. October 21, 1996
Page 2

CERTIFICATION

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to be the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Eric Gerstenberg

Eric Gerstenberg Vice-President Clean Harbors Services, Inc. Anthony G. Ianello Executive Director Illinois International Port District

askall





OFFICE OF RCRA WASTE MANAGEMENT DIVISION EPA, REGION V

1501 WASHINGTON STREET • BRAINTREE, MA 02184-7599

September 10, 1996

To: Facility Mailing List Addressees

Re: Notification of Class 1 Permit Modifications

Dear Interested Party:

Clean Harbors Services, Inc. (CHSI) is a hazardous waste treatment, storage, and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHSI currently operates under a RCRA Part B permit issued by the IL Environmental Protection Agency (IEPA) on September 30, 1993.

On June 12, 1996 CHSI requested a Class 1 permit modification to replace/upgrade the auger of the facility's fuel blending system with a functionally equivalent component and to revise Section A of the RCRA Part B permit listing acceptable waste codes to include Carbamate Production Wastes approved by USEPA in April, 1996. The IEPA approved the Class 1 permit modification request on August 20, 1996.

On July 16, 1996 CHSI requested a Class 1 permit modification to change the beeper numbers for the emergency coordinators in the facility's Contingency Plan. The IEPA approved the Class 1 permit modification request on August 20, 1996.

On August 3, 1996 CHSI requested a Class 1 permit modification to designate a new alternate emergency coordinator and to reflect an area code for the emergency coordinator in the facility's Contingency Plan. This modification is an administrative change which does not require prior regulatory approval.

On August 6, 1996 CHSI requested a Class 1 permit modification to change the legal name of the facility from "Clean Harbors of Chicago, Inc." to "Clean Harbors Services, Inc.". This name change was made solely for business/marketing reasons and does not reflect any change in ownership or operation of the facility. This modification is an administrative change which does not require prior regulatory approval.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations at 35 IAC 703.281(a)(2) which require CHSI to send a notice of the modification to all persons on the facility mailing list within 90 days after the Agency approves the request. If you have any questions, please feel free to call Mr. James Laubsted, CHSI Facility Compliance Manager, me at (312) 646-6202.

Sincerely,

Paul A. Ahearn

Director, Regulatory Compliance



1501 WASHINGTON STREET • P.O. BOX 850327 • BRAINTREE, MA 02185-0327 (617) 849-1800

September 10, 1996

To: Facility Mailing List Addressees

Re: Notice of Request for Class 2 Modification & Temporary Authorization

Notice is given to all interested persons that Clean Harbors Services, Inc. (CHSI), a permitted hazardous waste treatment, storage, and transfer facility located at 11800 South Stony Island Avenue in Chicago, IL has filed a Class 2 Permit Modification request with the Illinois Environmental Protection Agency (IEPA) to modify certain RCRA Part B permit provisions related to waste prequalification testing requirements. In addition, CHSI has filed a request for a temporary authorization to immediately implement the proposed modifications.

Pursuant to 35 IAC 703.282, CHSI announces a 60-day comment period beginning September 11, 1996 and ending November 11, 1996 during which all interested parties have the opportunity to review the Class 2 permit modification request and to submit written comments to the IEPA. CHSI will hold an informational public meeting open to all interested persons to discuss the proposed modification. The meeting will be held on October 10, 1996 from 7:00-8:00 P.M. at Olive-Harvey College, 10001 S. Woodlawn Avenue, Chicago, IL.

Copies of the modification request are available for review during normal business hours at CHSI's business office at 11800 South Stony Island Avenue in Chicago, IL and at IEPA's office in Springfield, IL. A copy of the application is also available at the Olive-Harvey College Library. A copy of CHSI's compliance history during the life of its existing permit is available from the IEPA. Information regarding application viewing time and place, CHSI's existing permit, applicable regulatory requirements, permit modification procedures, and CHSI's compliance history may be obtained from Ms. Mara McGinnis, IEPA, 2200 Churchill Road, Springfield, IL 62794-9267 or at (217) 524-3300.


This notice is provided to you as an addressee on the CHSI mailing list maintained by IEPA. A legal notice announcing the proposed Class 2 modification request is scheduled to appear in the <u>Daily Southtown</u> on September 11, 1996.

If you have any questions regarding the proposed modification, please feel free to contact Mr. James Laubsted, CHSI's Facility Compliance Manager, at (312) 646-6202.

Sincerely,

Paul A. Ahearn

Director, Regulatory Compliance



1501 WASHINGTON STREET • P.O. BOX 850327 • BRAINTREE, MA 02185-0327 (617) 849-1800

Via Overnight Delivery

August 6, 1996

Mr. Edwin C. Bakowski, P.E. Manager, Permit Section Bureau of Land Illinois Environmental Protection Agency 2200 Churchill Road Post Office Box 19276 Springfield, IL 62794-9276

Mr. Karl E. Bremer, Chief Waste Management Branch U.S. Environmental Protection Agency Region 5 77 West Jackson Boulevard Chicago, Il 60604-3590 RECEIVED

AUG - 7 1996

PERMIT SECTION

Re: Clean Harbors of Chicago, Inc. EPA ID No. ILD000608471 IEPA RCRA Part B Permit No. B-16-M USEPA HSWA Permit No. ILD000608471

USEPA HSWA Permit No. ILD000608471

Class 1 Permit Modification - Facility Name Change

Dear Mr. Bakowski and Mr. Bremer:

In accordance with the provisions of 35 IAC 703.281 and 40 CFR 270.42(a), Clean Harbors of Chicago, Inc. (CHCI) is pleased to submit this letter to notify the Illinois Environmental Protection Agency and the US Environmental Protection Agency of a Class 1 modification.

Specifically, please be advised that effective August 6, 1996 the legal name of the facility was changed from "Clean Harbors of Chicago, Inc." to "Clean Harbors Services, Inc." (CHSI). This name change was made solely for business/marketing reasons and does not reflect any change in the ownership or operation of the facility. As such, the modification is a Class 1 administrative change which does not require prior regulatory approval. A revised RCRA Part A application (original signature version to IEPA, photocopy to USEPA) reflecting the new facility name is enclosed for your records.



Mr. Edwin C. Bakowski/IEPA and Mr. Karl E. Bremer/USEPA August 6, 1996
Page 2

Finally, please note that in accordance with 35 IAC 703.281(a)(2) and 40 CFR 270.42(a)(1)(ii), CHSI shall send a notice of the Class 1 modification to all persons on the facility mailing list within 90 days of the change, i.e., by November 4, 1996.

If you have any questions this letter, please do not hesitate to contact me at (617) 849-1800, extension 4473.

Sincerely,

Paul A. Ahearn

Director, Regulatory Compliance

Enclosure

cc: Anton Martig, USEPA Region V TSCA (Letter Only)

=:ease print or type with ELI	ΓΕ type (1)	2 characte	rs per ir	icn) ir	the i	นทรก	aced	area	ș ont	<u>v</u>			=,	rm Abbri	ovea.	CMBN	Vo. 20		4 Expire Vo. U24	
For EPA Regional Use Only					8	E	P	A	X											
			United	State	s Envi	ironm	rental	Prot	ection	n Age	ency									
		Ha	ızar		Vashi Na i C	•	-			D۵	rn	nit								
		116	ızaı		bi			_			, 1 1 1									
Date Received Month Day Year							rt /		/ 1 1							1				
			1.	Read 1	he ins				starti	ng)										
l. Installation's EPA ID N	umber (M	lark 'X' in	the app	ropn	iate b	ox)														
A. First Part A Su	bmission				<u>-</u>			X	B. F	art /	A Am	endi	ment	#		-				
C. Installation's EPA ID N	umber	··· <u>- '</u>		0	. Sec	ond	ary (() Nu	mbe	r (If i	eppii	cabk	9)							
ILD000	6 0	8 4	7 1				ĺ				•		į _			_				
II. Name of Facility	_		·																	
CLEAN	HA	R B	O R	l s		S	Ε	R	V	I	C	E	S		I	N	С			
III. Facility Location (Physical Physical sical addı	ress not F	.O. Box	or F	oute	Nun	nber))						_		<u> </u>					
A. Street																				
1 1 8 0 0	s o	U T	H !	s	T	0	N	Y		I	S	L	A	N I	D .		<u>A</u> _	V	E	i
Street (Continued)						· 	_													
					<u> </u>			1		<u> </u>	<u> </u>					!				
City or Town					, -	,	, ···		,	St	ate	Zi	Coc	ie						
CHICAG	0	;	<u> </u>				! !	<u> </u>	<u> </u>	I	Ļ	6	0	6	1	7	_			\perp
County Code County Na	me	٠٠	· 				,		,		· ·							- 1	;	
<u>c</u> 00	K		<u> </u>	<u> </u>	İ	<u> </u>					<u> </u>	<u>.</u>								
B. Land Type C. Geogra	<u> </u>												_	D. Fa		<u> </u>		nce (
(Enter code) LATITUDE		Minutes, & 5 0 4												Mon		Dan			Year	
S 4 1 IV. Facility Mailing Addre	_	. 0 4	4	¹ U	<u> </u>	! /	•	3 4	1 1	U i	4	b		. 0	/_ <u>:</u>		9	Ι'	9 ! 8	3 10
Street or P.O. Box		- -	·											_					-	<u></u>
1 1 8 0 0	s o	UT	Н	s	T	0	N	Y		ī	9	L	Δ	N			A	V	E	1
City or Town	<u> </u>	<u> </u>	11 1	10	1 -		1 1		L	Sta		·	Coc			<u>`</u>	<u> </u>		<u> </u>	
CH ICAG	0	<u>-</u>	Ī	T	Ţ					I	L	6	0	6	1	7	_			
V. Facility Contact (Perso		ontacted	regard	ing w	aste	acth	vities	at f	ecilit			Š		· •				_		
Name (Last)	, %						(FI	rst)					_	j	ĺ	P		1		***
L A U B S T	E D			T	i		J	A	м	E	S			1			2	5	V	1
Job Title	ע ט ט		<u>-</u> -		•						_		le an	d Nun	nbe	(40 0	3	7 1	000	!
C O M P L I	A N	C E	М	G	P		3	1	2	<u> </u>	6	4	6	-	6	52 E	64.	I Bi D i	336	
VI. Facility Contact Addre			_	3	71		J	Ţ	٤.		U	7				~ 211		- 21		
A Contact Address	Street or	 																		

State

Zip Code

X

City or Town

EPA I.D. Number	(Enter from page 1)			Secondary ID Number (E	nter from page 1)
ILD0	0 0 6 0 8 4	7 1			
VII. Operator info	ormation (See instructions	;)			1
Name of Operato	ır				
C L E A	N HARB	ORS	SER	VI CES I	N C
Street or P.C 30	<u> </u>				
1 1 8 0	0 S O U T	н в т	ONY	I S.LA N.D	A 7 E
City or Town				StateIP Code	
CHIC	A G O	1 1	1 1 "	I L 6 0 6 1	7 -
	<u> </u>				
Dhana Marakan A		•	B. Operator Typ	ce C. Change of Operator Indicator	Date Changed
	Area Code and Number) 6 4 6 - 6 2	0 2	P	Yes No X	Moπth Day Year
	er (See Instructions)		4	T. A.	
	ity's Legal Owner				
C L E A		ORS	SER:	VI CESI	N C
1 1 8 0		н ѕт	ONY	I S L A N D	7 V 5
City or Town	O S O O T	п БТ	UINI	State ZIP Code	AVE
CITY OF 10WN	A G O			I L 6 0 6 1	7 -
C III I C	A G O	_!	<u> </u>	TI DO O O T	
			B. Owner Type	C. Change of Owner	Date Changed
i	Area Code and Number)		1	Indicator	Month Day Year
3 1 2 -		0 2	P	Yes: No X	
IX. SIC Codes (4-					
1	digit, in order of significar	nce)			
	Primary	nce)		Secondary	:
4 9 5 3	<u> </u>			Secondary (Description)	:
4 9 5 3	Primary				
4 9 5 3	Primary (Description) REFUSE S			(Description)	
	Primary (Description) REFUSE S Secondary	YSTEMS		(Description)	
	Primary (Description) REFUSE S Secondary (Description) mental Permits (See Instru	YSTEMS		(Description)	tion
X. Other Environ A. Permit Type (Enter code)	Primary (Description) REFUSE S Secondary (Description) mental Permits (See Instru	YSTEMS uctions) ermit Number		(Description) Secondary (Description)	
X. Other Environ A. Permit Type (Enter code)	Primary (Description) REFUSE S Secondary (Description) mental Permits (See Instru B. Permits L. D. O. O. O.	ermit Number	7 1	Secondary (Description) C. Description IEPA RCRA PART B USEPA SWA PERMI	T
X. Other Environ A. Permit Type (Enter code)	Primary (Description) REFUSE S Secondary (Description) mental Permits (See Instru B. Permits L. D. O. O. O. O. O. D. D. O. O. O. D. D. O. O. O. D. D. D. O. O. D. D. D. O. O. D. D. D. D. O. O. D. D. D. D. D. D. D. D. D. D. D. D. D.	ermit Number 6 0 8 4 6 - O P	7 1	Secondary (Description) C. Descrip IEPA RCRA PART B USEPA SWA PERMI IEPA LAND (OP RA	T TIONS)
X. Other Environ A. Permit Type (Enter code)	Primary REFUSE S	ermit Number 6 0 8 4 6 - 0 P P - 0 8	7 1	Secondary (Description) C. Description IEPA RCRA PART B USEPA SWA PERMI	T TIONS)
X. Other Environ A. Permit Type (Enter code)	Primary REFUSE S	ermit Number 6 0 8 4 6 - 0 P P - 0 8 B T E	7 1	Secondary (Description) C. Descrip IEPA RCRA PART B USEPA SWA PERMI IEPA LAND (OP RAMI IEPA LAND (OPERAMI	T TIONS) TIONS)
X. Other Environ A. Permit Type (Enter code)	Primary REFUSE S	ermit Number 6 0 8 4 6 - 0 P P - 0 8	7 1	Secondary (Description) C. Descrip IEPA RCRA PART B USEPA SWA PERMI IEPA LAND (OP RA	T TIONS) TIONS)
X. Other Environ A. Permit Type (Enter code)	Primary REFUSE S	ermit Number 6 0 8 4 6 - 0 P P - 0 8 B T E	7 1 8 9 0 1	Secondary (Description) C. Descrip IEPA RCRA PART B USEPA SWA PERMI IEPA LAND (OP RAMI IEPA LAND (OPERAMI	T TIONS) TIONS)

EPA I.D. Number (Enter from page 1) I L D 0 0 0 6 0 8 4 7 1

Secondary ID Number (Enter from page 1)

XL Nature of Business (Provide a brief description)

Clean Harbors Services, Inc. (CHSI) offers a liquid industrial waste pretreatment service. CHSI accepts hazardou and non-hazardous wastewaters which do not meet sewer discharge specifications. Through physical and chemical treatment, CHSI produces and effluent acceptable for sewer discharge and a dewatered sludge. The effluent is discharged into the Metropolitan Water Reclamation District of Greater Chicago sewer system and the sludge is shipped to properly-licensed offsite treatment and/or disposal facilities. CHSI also accepts hazardous and non-hazardous waste, which is stored in tanks and containers and subsequently transferred to properly-licensed offsite treatment and/or disposal facilities.

XII. Process Codes and Design Capacities

- A. PROCESS CODE Enter the code from the list of process codes below that best describes each process to be used at the facility. Thirteen lines are provided for entering codes. If more lines are needed, attach a separate sheet of paper with the additional information. For "other" processes (i.e., D99, S99, T04 and X99), describe the process (including its design capacity) in the space provided in item XIII.
- B. .. PROCESS DESIGN CAPACITY For each code entered in column A, enter the capacity of the process.
 - 1. AMOUNT Enter the amount. In a case where design capacity is not applicable (such as in a closure/post-closure or enforcement action) enter the total amount of waste for that process.
 - 2. UNIT OF MEASURE For each amount entered in column 8(1), enter the code from the list of unit measure codes below that describes the unit of measure used. Only the units of measure that are listed below should be used.
- C. PROCESS TOTAL NUMBER OF UNITS Enter the total number of units used with the corresponding process code.

PROC CODE		APPROPRIATE UNITS OF MEASURE FOR PROCESS DESIGN CAPACITY	PROC		PROCESS		APPROPRIATE UNITS OF MEASURE FOR PROCESS DESIGN CAPACITY
	Disposai:		T87	Smeltir	ng, Melting,		
<i>D7</i> 9	Underground Injection	Gallons: Liters: Gallons Per Day; or Liters Per Day	T88	Or Refi	ining Furnace m Dioxide	1	
D80	Landfill	Acre-feet or Hectare-meter		Chloric	le Process	1	
D81	Land Treatment	Acres or Hectares	ĺ	Oxidati	ion Reactor	1	
D82	Ocean Disposal	Gallons Per Day r Liters Per Day	T89	Methan	ne Reforming	1	Gallons Per Day; Liters Per
D83	Surface Impoundment	Gallons or Liters	ì	Furnac	39	1	Dav: Pounds Per Hour: Short
D99	Other Disposal Storage:	Any Unit of Measure Listed Below	T90		g Liquor ery Furnace	\	Tons Per Hour: Kilograms
004		A. 11 1	T91	Combu	istion Device	1	Per Hour; Metric Tons Per
S01	Container (Barrel, Drum, Etc.)	Gallons or Liters			n The Recovery fur Values From	1	Day; Metric Tons Per Hour; Short Tons Per Day; or Btu's
S02	Tank	Gallons or Liters		Spent	Sulfuric Acid	1	Per Hour
S03	Waste Pile	Cubic Yards or Cubic Meters	T92		n Acid Furnaces	1	rei noë
S04	Surface impoundment	Gallons or Liters	T93		ndustrial	7	
S05	Drip Pad	Gallons or Liters	1		es Listed in	j	
S06	Containment Building-Storage	Cubic Yards or Cubic Meters	1	40 CFR	7 §260.10	,	
599	Other Storage	Any Unit of Measure Listed Below	T94	Contail Buildin	nment ig-Treatment		Cubic Yards or Cubic Meters
	<u>Treatment:</u>		:		~	٠	
T01	Tank	Gallons Per Day or Liters Per Day			laneous (Subpart)	Λ.	
T02	Surface Impounament	Gallons Per Day or Liters Per Day	X01		Burning/Open		Any Unit of Measure Listed
T03	Incinerator	Short Tons Per Hour: Metric Tons		Detona			Below_
		Per Hour: Gallons Per Hour: Liters	X02	Mechai	nical Processing		Short Tons Per Hour: Metric
		Per Hour: or Stu's Per Hour					Tons Per Hour; Short Tons
T04	Other Treatment	Gallons Per Day; Liters Per Day:	l				Per Day; Metric Tons Per Day;
		Pounds Per Hour; Short Tons Per	į				Pounds Per Hour: or
		Hour: Kilograms Per Hour: Metric	İ				Kilograms Per Hour
		Tons Per Day: Metric Tons Per	X03	Therma	al Unit		Gallons Per Day; Liters Per
		Hour; Short Tons Per Day; or	1				Day; Pounds Per Hour: Short
		Btu's Per Hour					Tons Per Hour: Kilograms Per
T80	8oiler	Gallons or Liters	1				Hour: Metric Tons Per Day;
T81	Cement Kiln	Gallons Per Day; Liters Per Day;			(Metric Tons Per Hour: Short
T82	Lime Kiln	Pounds Per Hour: Short Tons Per			•		Tons Per Day; or Stu's Per
T83	Aggregate Kiln	Hour: Kilograms Per Hour: Metric	1				Hour
T84	Phosphate Kiln	Tons Per Day: Metric Tons Per	X04	Geolog	ic Repository		Cubic Yards or Cubic Meters
T85	Coke Oven	Hour: Short Tons Per Day: or	X99		Subpart X		Any Unit of Measure Listed
T86	Blast Furnace	Stu's Per Hour			'		3elow -

UNIT OF MEASURE	UNIT OF MÉASURE CODE	UNIT OF MEASURE	UNIT OF MEASURE CODE	UNIT OF MEASURE	UNIT OF MEASURE CODE
Gallons	 U L H	Short Tons Per Ho Metric Tons Per H Short Tons Per Da Metric Tons Per Da Pounds Per Hour Kilograms Per Hou	our	Cubic Yards Cubic Meters Acres Acre-feet Hectares Hectare meter Stu's Per Hour	

waste in roll-off

containers

Plea	se p	rint o	r typ	e wit	th ELI	TE ty	/De	: ch	aract	ers C	er in	ch) ir	n the	unsh	aded	area	s only)mi Ap	PION	OG, UMI	3 NO. 2			248-EF
EP/	LLD	. Nu	nbe	r (Er	iber fi	ont j	oege	.1)	8.6			2.0						Sec	one	lery i	D N	umb	er (l	Enter	for	peg	es)	i.
I	L	D	0	0	0	6	0	8	4	7	ļ																	
XIL)roc	0\$\$:	Cod	98 81	nd De	elgn	Свр	abili	ies:	(Cor	dnu	ed) 1			•												(
																-												

EXAMPLE FOR COMPLETING ITEM XII (Shown in line number X-1 below): A facility has a storage tank, which can hold \$33.788

Line		Proc		B. PROCESS DESIGN CAPACITY	14.	C. Process	For Official
Vumbe		Code		t. Amount (appeny)	2. Unit Of Measure (Enter code)	Total Number Of Units	Use Only
X 1	s	0	2	-111	5 G	0 0 1	
Ť	S	0	1	160,325 (2915 X 55-GAL. EQUIVALENT)	G	2915	34 SQ 23-52-1
2	s	0	1	300 (10 X 30 CUBIC YARDS EQUIVALENT)	Y	010	
3	s	0	1	254,400 (TRANSPORTATION VEHICLES)	G	029	
4	s	0	2	255,380	G	030	
5	D	8	3	2,000,000	G	004	
6	T	0	1	A 200,000 .	υ	001	
7							
8							
9							
1 0				• • • • • • • •			
1 1				· ·			
1 2							
1. 3.					. =		

NOTE: If you need to list more than 13 process codes, attach an additional sheet(s) with the information in the same-timest as above. Number the lines sequentially, taking into account any lines that will be used for "other" processes (La., 1999; Marriel and X99) in item XIII.

	ther Processes	(Follow Instructions from Nam XII for D99, S99), T04 and .	X99 process	codes)
Line Number (Enter és li seg cultil)	in (From list above)	B. PROCESS DESIGN CAPACITY 1: Amount (Spen)	2. Unit Of Managers (Enter code)	C. Process Total Number Of Units	D. Description C. Process
X I	TOO				In-situ Vitrification
1.	T 0 4	12,000	ַ ט	001	TO4A: Treatment of D002
					liquid/solid mixtures in containers by removal of liquid
2	T 0 4	3,000	U	001	TO4B: Compaction of
V.					hazardous waste solids in containers
3	T 0 4	55,000	U	001	TO4C: Hazardous waste
				estation of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the second of the	fuel blending
4	т 0 4	600	ט	010	TO4D: Stabilization/
					fixation of hazardous

	ΕP	A L	D. N	umt	er (E	nter	fron	o pag	(1):e		Ky.						<u> </u>	ieco	ndar	y ID	Num	ber	(Ente	r tro	m pi	igo 1)	
I		L	Ď	0	0	0	6	0	8	4	7	1																
	ΧſΛ	/. D	esci	iptic	on of	Haze	ırdot	ns W	este	Bry Mille	\supset	/	1	i ş	V ≥ 1/2	•	- 7						7 <u>7</u> .	- 3"	∦ . ∓	****	- 3 (1)	7-

- A. EPA HAZARDOUS WASTE NUMBER Enter the four-digit number from 40 CFR, Part 261 Subpart D of each listed hezardous trasts you will handle. For hazardous trastes which are not listed in 40 CFR, Part 261 Subpart D, enter the four-digit number(s) from 40 CFR, Part 261 Subpart C that describes the characteristics end/or the toxic conteminants of those hazardous wasters.
- B. ESTIMATED ANNUAL QUANTITY For each listed waste entered in column A estimate the quantity of that weeks that will be handled on an annual basis. For each characteristic or toxic contaminant entered in column A estimate the total sinusit quantity of all the non-listed waste(s) that will be handled which possess that characteristic or contaminant.
- C UNIT OF MEASURE For each quantity entered in column 8 enter the unit of measure code. Units of measure which must be used and the appropriate codes are:

ENGLISH UNIT OF MEASURE	CODE	METRIC UNIT OF MEASURE	CODE
POUNDS	P	KILOGRAMS	κ
TONS	r	METRIC TONS	м

If facility records use any other unit of measure for quantity, the units of measure must be converted into one of the required units of measure taking into account the appropriate density or specific gravity of the weste.

D. PROCESSES

1. PROCESS CODES:

For listed hazardour waste: For each listed hazardous weeks entered in column A select the code(s) from the list of process codes contained in item XII A. on page 3 to indicate how the weste will be stored, treated, and/or disposed of at the breility.

For non-listed hazardous wests: For each characteriatic or toxic contaminant entered in column A, celect the colicie) from the list of process codes contained in them XII A, on page 3 to indicate all the processor that will be used to store the object of dispose of all the non-listed hazardous wasted that pocesso that characteriatic or toxic contaminant.

NOTE: THREE SPACES ARE PROVIDED FOR ENTERING PROCESS CODES. IF MORE ARE NEEDED:

- 1. Enter the first two or described above.
- 2. Enter *000° in the extreme right box of from XIV-D(1).
- L. Enter in the space provided on page 7, item XIV-E, the line number and the additional code(s).
- 2. PROCESS DESCRIPTION: If a codd is not listed for a process that still be used, describe the process in the open provided on the form (D.(2)).

NOTE: HAZARDOUS WASTES DESCRIBED BY MORE THAN ONE EPA HAZARDOUS WASTE NUMBER - Hex republic that can be described by more than one EPA Hazardous Wester Number that the described on the form to define.

- Select one of the EPA Hexardous Waste Numbers and enter it in column A. On the seme line complete columns
 8, C and D by estimating the total ennual quantity of the exact and describing all the processes to be used to treat, a store, and/or dispose of the exacts.
- In column A of the next line enter the other EPA Reportous Wests Number that ean be used to describe the excitate in column D(2) on that line enter "included with above" and make no other entries on that line.
- Repeat step 2 for each EPA Hazardoup Waste Mumber that can be used to describe the hazardous coales.

EXAMPLE FOR COMPLETING ITEM XIV (chown in line number) X-1, X-2, X-3, and X-4 below) - A facility will treat and dispose of an estimated 900 pounds per year of chrome chavings from Exitor tenning and finishing operation. In addition, the facility will treat and dispose of three non-listed wastes. Two wastes corrective only and there will be an actimated 200 pounds per year of that waste. Treatment will be in an incinerator and disposed will be in a landfill.

	٠.				EPA		1	ESTEMA:				:::::			### F	March.	- 13		D.	PRO	CES	S
	ine mber		W	AS	ARI E N	-	au	ANNUA IANTITY WASTE	OF	(Ec	SURE nter de)	C	1) PA	OCE	SS C	ODE	S (E	iter (code)			(2) PROCESS DESCRIPTION (If a code is not entered in D(1))
X	1	K	F	0	5	4		900			P	T	0	3	D	8	0	877	<i>y.</i> 1.		,	
X	2	0		0	0	2	17.37	400		and the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of the State of t	Palka	_ T	0	3	D	8	0	ÇÎ.	1.40		73.	
X	3	0.		0	0	1	1	100		\$50 P	P#::	7.	0	3	D	. 8	0		14, 1	. 1.3	14.1	
X	4	D		0	0	2			,°.	A P.	y s Salam	12.50 12.50 13.50	¥ 1. ∳	19 14				a1,	1.41			Included With Abovo

EPA LD. Number (Enter from page 1) ...Secondary ID Number (Enter from page 1) 4 7 1 Ι | L D 0 1 0 1 0 1 6 0 8 XIV. Description of Hazardous Wastes (Continued) C. UNIT OF #ALEPA A ESTIMATED Notes that the second second second D. PROCESSES ANNUAL MEASURE HAZARDOUS Lina *WASTE NO. QUANTITY OF (Enter :: (1) PROCESS CODES (Enter code) (2) PROCESS DESCRIPTION code) Numbe WASTE (If a code is not entered in D(1)) (Enter code) 1 1 T 0 0 1 15,000 0 | 0: 2 0: TO1A T! ABCEFGH 1 2 T D 0 0 | 2 5.000 0 ! S 0 2 T 0 ABCEFGH TO1A 3 T **0** i 0 0 ± 3 5,000 0 0 2 4 D SI T TO1A **ABCEFGH** T 4 5,000 D 0 0 | 4 0 2 0 4 S S O I T TO1A ABCDEFGH 5 T 2 0 0 5 250 0 S 0 T 0 TO1A **ABCDEFGH** 6 T 0 0 250 D 6 TOLA 2 01 ABCDEFGH 10 S n T! 4 7 0 7 250 2 D 0 T SI 0 Si 0 T 0 4 TOLA ABCBEFGH 8 0 0 8 250 T 2 Tİ 0 TO1A 0 SI 0 4 ABCDEFGH 9 TOLA D 0 0 9 250 T 2 T 0 4 0 0 S: ABCDEFGH 1 1 0 250 $\mathbf{D} + \mathbf{0}$ 1 +0 T 0 2 TI **0** i 4 TO1A $S \perp$ S 0 ABCDEFGH 1 1 D 0 1 1 250 T SI 0 S 0 2 T. 0 4 TO1A **ABCDEFGH** 2 1 0 2 250 T 2 Ď 0 S 0 T 0 4 ABCEFGH 1 3 3 T D 0 1 250 S 0 S 0 2 T 0 4 **ABCEFGH** 4 0 4 250 T 0 T 0 ABCEFGH S 0 1 5 D 0 5 250 T S 2 T 0 4 S 0 0 ABCEFGH 1 8 T 'n 0 1 6 250 0 O T 0 S **ABCEFGH** 7 T 2 T 0 D 0 250 S 0 S 0 ABCEFGH 1 8 15,000 TOLA D 0 1 8 S 0 1 S 0 2 T 0 4 T ABCEFGH 1 0 9 TOLA D 0 1 15,000 T S 0 T 0 0 4 ABCEFGH 2 0 D 0 2 0 15,000 T 2 T 0 0 1 0 4 S S ABCEFGH 2 2 TOLA 1 D 0 1 15,000 S 0 S 0 2 T 0 1 4 **ABCEFGH** T 2 2 TOLA D 0 2 2 15,000 S 0 1 S 0 2 T 0 4 **ABCEFGH** 2 3 D 0 2 3 15,000 S 0 1 S 0 2 T 0 4 TOLA T ABCEFGH 2 4 2 TOLA D 0 4 15,000 T 0 S S 0 2 T 0 **ABCEFGH** 2 5 0 2 5 TOLA D 15,000 T S 0 1 S 0 2 T 0 4 **ABCEFGH** 6 2 T TO1A 0 6 SI 0 1 S 0 2 0 4 D 15,000 T **ABCEFGH** 2 7 2 D 0 7 15,000 T 0 s i 0 0 4 TOLA **ABCEFGH** 2 8 TOLA 2 D 0 8 15,000 T T 0 4 **ABCEFGH** SI 0 1 SI 0 TOLA 2 9 D 0 2 9 15,000 S T 0 0 ABCEFGH 0 3 0 $3 \mid 0$ TOLA D 0 15,000 T 0 1 SI 0 2 T 0 4 **ABCEFGH** 1 ĎΪ 0 3! 15.000 T $S \mid 0$ 1 2 T İ 0 4 SI 0 | ABCEFGH 3 2 2 T TOLA D ! 0 31 15,000 S | 0 | 1 S | 0 | 2 T 0 4 ABCEFGH 3 0 3 2 Ti 4 0 31 T S | 0 | SI 0 1 TO1A 15.000 ABCEFGH

The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control The control	EPA LI	D. Number (Enter tr	ons page 1)	Yan marangan Cara		Secondary I	D Number (Enter from page 1)
ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEPA ALEP	IL	D 0 0 0	6 0 8 4 7	1	nm Laufteil.		
MAZERBOUS	XIV.De	escription of Hazard	lous Wastes (Continue	d)			
					oyntavio ud enim ateri	D. PRO	CESSES
1		WASTE NO.	QUANTITY OF (Enter	(1) PROCL	ESS CODES (Ente	er code)	
2							
3							
4	<u> </u>			· .		_ 	
S							
6			15,000	S 0 1			
7 D 0 4 0 15,000		-		S 0 1	S 0 2	T 0 4	
8				S 0 1	S 0 2	T 0 4	ABCEFGH TO1A
9	-			S 0 1			ABCEFGH TO1A
1	-	1	 	S 0 1	S 0 2	T 0 4	
1	9			S 0 1	S 0 2	T 0 4	ABCEFGH TOLA
1	1 0	D 0 4 3	15,000 T	S 0 1	S 0 2	T 0 4	ABCEFGH TO1A
1 3 F 0 0 4 7,500 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 1 4 F 0 0 5 7,500 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 1 5 F 0 0 6 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 1 6 F 0 0 7 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 1 7 F 0 0 8 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 1 8 F 0 0 9 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 1 9 F 0 1 0 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 0 F 0 1 1 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 1 F 0 1 2 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 2 7 F 0 2 0 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 4 F 0 2 1 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 5 F 0 2 2 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 6 F 0 2 3 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH 2 7 F 0 2 4 250 T S 0 1 S 0 2 T 0 4 ABEFGH 2 8 F 0 2 5 15,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 9 F 0 2 6 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 9 F 0 2 6 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	1 1	F 0 0 1	7,500 T	S 0 1	S 0 2 5	T 0 4	ABCEFGH TOLA
1 4 F 0 0 5 7,500 T S 0 1 S 0 2 T 0 4 ABCEFGH TOLA 1 6 F 0 0 0 7 1,000 T S 0 1 S 0 2 T 0 4 ABCEFGH TOLA 1 6 F 0 0 0 7 1,000 T S 0 1 S 0 2 T 0 4 ABCEFGH TOLA 1 7 F 0 0 8 1,000 T S 0 1 S 0 2 T 0 4 ABCEFGH TOLA 1 8 F 0 0 9 1,000 T S 0 1 S 0 2 T 0 4 ABCEFGH TOLA 1 9 F 0 1 0 1,000 T S 0 1 S 0 2 T 0 4 ABCEFGH TOLA 2 0 F 0 1 1 1,000 T S 0 1 S 0 2 T 0 4 ABCEFGH TOLA 2 0 F 0 1 1 1,000 T S 0 1 S 0 2 T 0 4 ABCEFGH TOLA 2 1 F 0 1 2 1,000 T S 0 1 S 0 2 T 0 4 ABCEFGH TOLA 2 2 F 0 1 9 1,000 T S 0 1 S 0 2 T 0 4 ABCEFGH TOLA 2 3 F 0 2 1 1,000 T S 0 1 S 0 2 T 0 4 ABCEFGH TOLA 2 4 F 0 2 1 1,000 T S 0 1 S 0 2 T 0 4 ABCEFGH TOLA 2 5 F 0 2 2 1,000 T S 0 1 S 0 2 T 0 4 ABCEFGH TOLA 2 6 F 0 2 3 1,000 T S 0 1 S 0 2 T 0 4 ABCEFGH 2 7 F 0 2 4 250 T S 0 1 S 0 2 T 0 4 ABEFGH 2 8 F 0 2 5 15,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	1 2	F 0 0 3	7,500 T	S 0 1	S 0 2	T 0 4	ABCEFGH TO1A
1	1 3	F 0 0 4	7,500 T	S 0 1	S 0 2	T 0 4	ABCEFGH TOLA
1 6 F 0 0 7 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 1 7 F 0 0 8 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 1 8 F 0 0 9 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 1 8 F 0 1 0 1 0 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 2 0 F 0 1 1 1 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 2 1 F 0 1 2 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 2 1 F 0 1 2 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 2 2 7 F 0 2 0 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 2 3 F 0 2 0 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 2 4 F 0 2 1 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH 2 6 F 0 2 3 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 7 F 0 2 4 250 T S 0 1 S 0 2 T 0 4 ABEFGH 2 8 F 0 2 5 15,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	1 4	F 0 0 5	7,500 T	S 0 1	s 0 2	T 0 4	ABCEFGH TO1A
1 7 F 0 0 8 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 1 8 F 0 0 9 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 1 9 F 0 1 0 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 0 F 0 1 1 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 1 F 0 1 2 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 1 F 0 1 2 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 2 F 0 1 9 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 3 F 0 2 0 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 4 F 0 2 1 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH 2 4 F 0 2 1 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH 2 5 F 0 2 2 1,000 T S 0 1 S 0 2 T 0 4 ABCFGH 2 6 F 0 2 3 1,000 T S 0 1 S 0 2 T 0 4 ABCFGH 2 7 F 0 2 4 250 T S 0 1 S 0 2 T 0 4 ABCFGH 2 8 F 0 2 5 15,000 T S 0 1 S 0 2 T 0 4 ABCFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABCFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABCFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABCFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABCFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABCFGH	1 5	F 0 0 6	1,000 T	S 0 1	S 0 2	T 0 4	ABCDEFGH TO1A
1 8 F 0 0 9 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 1 9 F 0 1 1 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 0 F 0 1 1 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 1 F 0 1 2 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 1 F 0 1 9 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 2 F 0 1 9 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 3 F 0 2 0 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 4 F 0 2 1 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 5 F 0 2 2 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 6 F 0 2 3 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 7 F 0 2 4 250 T S 0 1 S 0 2 T 0 4 ABEFGH 2 8 F 0 2 5 15,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	1 6	F 0 0 7	1,000 T	S 0 1	S 0 2 1	r 0 4	ABCDEFGH TO1A
1 9 F 0 1 0 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 2 0 F 0 1 1 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 2 1 F 0 1 2 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 2 2 F 0 1 9 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 2 3 F 0 2 0 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 2 4 F 0 2 1 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 5 F 0 2 2 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 6 F 0 2 3 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 7 F 0 2 4 250 T S 0 1 S 0 2 T 0 4 ABEFGH 2 8 F 0 2 5 15,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	1 7	F 0 0 8	1,000 T	S 0 1	S 0 2 1	r 0 4	ABCDEFGH TO1A
2 0 F 0 1 1 1 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 1 F 0 1 2 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 2 F 0 1 9 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TOLA 2 3 F 0 2 0 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 4 F 0 2 1 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 5 F 0 2 2 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 6 F 0 2 3 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 7 F 0 2 4 250 T S 0 1 S 0 2 T 0 4 ABEFGH 2 8 F 0 2 5 15,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 9 F 0 2 6 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	1 8	F 0 0 9	1,000 T	S 0 1	S 0 2 1	r 0 4	ABCDEFGH TOLA
2 0 F 0 1 1 1 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 2 1 F 0 1 2 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 2 2 F 0 1 9 1,000 T S 0 1 S 0 2 T 0 4 ABCDEFGH TO1A 2 3 F 0 2 0 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 4 F 0 2 1 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 5 F 0 2 2 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 6 F 0 2 3 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 7 F 0 2 4 250 T S 0 1 S 0 2 T 0 4 ABEFGH 2 8 F 0 2 5 15,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 9 F 0 2 6 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	1 9	F 0 1 0	1,000 T	S 0 1	S 0 2 7	r 0 4	ABCDEFGH TOLA
2 2 F 0 1 9 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 4 F 0 2 1 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 5 F 0 2 2 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 6 F 0 2 3 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 7 F 0 2 4 250 T S 0 1 S 0 2 T 0 4 ABEFGH 2 8 F 0 2 5 15,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 9 F 0 2 6 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	2 0	F 0 1 1	1,000 т	S 0 1		F 0 4	ABCDEFGH TO1A
2 3 F 0 2 0 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 4 F 0 2 1 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 5 F 0 2 2 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 6 F 0 2 3 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 7 F 0 2 4 250 T S 0 1 S 0 2 T 0 4 ABEFGH 2 8 F 0 2 5 15,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 9 F 0 2 6 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	2 1	F 0 1 2	1,000 T	S 0 1	S 0 2 1	r 0 4	ABCDEFGH TO1A
2 3 F 0 2 0 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 4 F 0 2 1 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 5 F 0 2 3 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 6 F 0 2 3 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 7 F 0 2 4 250 T S 0 1 S 0 2 T 0 4 ABEFGH 2 8 F 0 2 5 15,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 9 F 0 2 6 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	2 2	F 0 1 9	1,000 T	S 0 1	S 0 2 1	г 0 4	ABCDEFGH TOLA
2 5 F 0 2 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 6 F 0 2 3 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 7 F 0 2 4 250 T S 0 1 S 0 2 T 0 4 ABEFGH 2 8 F 0 2 5 15,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 9 F 0 2 6 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	2 3	F 0 2 0		S 0 1	S 0 2 T	r 0 4	
2	2 4			S 0 1	S 0 2 T	r 0 4	
2 6 F 0 2 3 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 7 F 0 2 4 250 T S 0 1 S 0 2 T 0 4 ABEFGH 2 8 F 0 2 5 15,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 9 F 0 2 6 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	2 5	,					
2 7 F 0 2 4 250 T S 0 1 S 0 2 T 0 4 ABEFGH 2 8 F 0 2 5 15,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 9 F 0 2 6 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	2 6	F 0 2 3	1,000 T	S 0 1			ABEFGH
2 8 F 0 2 5 15,000 T S 0 1 S 0 2 T 0 4 ABEFGH 2 9 F 0 2 6 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	2 7						
2 9 F 0 2 6 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	2 8						
3 0 F 0 2 7 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH 3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	2 9						
3 1 F 0 2 8 1,000 T S 0 1 S 0 2 T 0 4 ABEFGH	3 0						
	3 1						
	-+-						
3 3 F 0 3 4 250 T S 0 1 S 0 2 T 0 4 ABCEFGH						1-2-1	

EPA LD. Number (Enter from page 1) Secondary ID Number (Enter from page 1) vê se bi 7 | 1 L 0 6 0 | 8 4 Ι D 0 0 XIV. Description of Hazardous Wastes (Continued) D. PROCESSES - A.EPA A ESTIMATED C. UNIT OF magical come and adjusting the MEASURE HAZARDOUS ANNUAL Line . QUANTITY OF (Enter :: (1) PROCESS CODES (Enter code) (2) PROCESS DESCRIPTION WASTE NO. WASTE code) (If a code is not entered in D(1)) Number (Enter code) T 3 2 0 0 5 250 0 0 | TI 4 **ABCEFGH** S. 2 T F 0 3 7 250 0 S 0 2 \mathbf{T}^{+} **0**i 4 **ABCEFGH** S 1 3 T F 0 3 8 250 2 01 4 **ABCEFGH** $S \mid 0$ S 0 T T 4 0 Ś 0 2 TI **0** i 4 **ABCEFGH** 0 3 9 15,000 S TOLA F 5 0 T 2 **ABCEFGH** 0 1,000 0 0 4 0 S: T Si T K O 0 2 ABCEFGH TO1A 1,000 2 0 1 0 0 4 7 K O 3 0 1,000 ABCEFGH TO1A 2 0 4 T S 0 0 T 8 0 0 1,000 T S 0 1 S 0 2 T 0 4 ABCEFGH TO1A K 4 9 K T 0 ABCEFGH TO1A 0 0 5 1,000 0 2 T 0 4 S SI 0 $\mathbf{K} : \mathbf{0}$ 0 6 1,000 T 2 T 0 4 ABCEFGH TOLA 0 SI 0 Si 1,000 1 K 0 0 7 T S 0 S 0 2 T 0 4 ABCEFGH TOLA 1 1 2 ·T K 0 0 8 1,000 0 0 0 4 ABCEFGH TOLA S T 1 3 T 0 K Ö 0 9 S 0 S 0 2 T 4 **ABCEFGH** 2,500 1 4 ABCEFGH T K 0 1 0 2,500 2 0 4 S 0 S 0 T 1 5 T S S 0 2 T 0 4 K 0 2,500 0 **ABCEFGH** 1 8 T S 0 S 0 0 K 0 100 4 **ABCEFGH** 1 7 0 T S 0 S 0 0 4 K 4 100 **ABCEFGH** 1 8 S K 0 1 5 250 S 0 1 0 2 T 0 4 T ABCEFGH 1 9 K 0 1 6 250 T 0 S T 0 S 0 4 **ABCEFGH** 2 0 T 0 S 0 2 T 0 4 K 0 250 S 1 **ABCEFGH** 2 K 0 1 8 250 S 0 1 S 0 2 T 0 4 **ABCEFGH** T 2 2 S 0 4 K 0 1 9 250 S 0 1 2 T 0 **ABCEFGH** 3 2 250 2 K 0 0 2 S 0 1 SI 0 T 0 4 T ABCEFGH 2 K 0 250 2 4 1 T S 0 S 0 2 T 0 **ABCEFGH** 2 5 2 2 T 0 K 0 250 S 0 SI 2 4 1 0 **ABCEFGH** 2,500 2 6 ĸ 0 2 3 S 0 1 S 0 2 T 0 4 T **ABCEFGH** 7 K 0 2 4 2,500 2 T 0 0 0 4 **ABCEFGH** 2 5 250 2 8 K 0 T 0 S 0 2 T 0 4 **ABCEFGH** 2 6 250 2 9 K 0 T 0 **ABCEFGH** SI 0 S 0 0 0 2 7 250 3 K T S 0 S 0 2 0 T 4 **ABCEFGH** 2 8 250 3 1 K 0 2 T S 0 1 SI 0 T I 0 4 ABCEFGH 2 9 100 2 K 0 Ť 2 T 0 3 SI 0 1 SI 0 4 **ABCEFGH** 3 0 100 K! 0 2 0 | 4 3 0 0 T I 3 S SI T **ABCEFGH**

	•					om page 1)			((C)				Andri	Sec	cond	ary	ID Number (Ent	À	page 1)
I	L	D	0	0	0	6 0 8	4 7 1					jelityk Postor	e e e e e Al Gregoria						
χη	/. De	ecipt	OTE	of Ha	2270	lous Westes (Continued)		•										
				PA 100U		B. ESTEMATED ANNUAL	C. UNIT OF	green	w)XX	3. V.	1797498		\$4.5°		0. 1	PRO	CESSES		Capital August 11
	ine mber	* * W	AST	E NO		QUANTITY OF WASTE			1) Pf		ESS C		3 (E		ode)				CRIPTION pred in D(1))
L	1	ĸ	0	3	1	100	T	s	0	1	s	0	2	T	0	4	ABCEFGH		
	2	ĸ	0	3	2	100	Ť	s	: O	1	S	0	2	T	o	4	ABCEFGH		
	3	K	0	3	3	100	T	s	0	1	s	0	2	T	0	4	ABCEFGH		
L	4	K	0	3	4	100	Ť	S	0	1	S	0	2	T	0	4	ABCEFGH	-	
	5	K	0	3	5	100	T	S	0	1	S	0	2	T	0	4	ABCEFGH		
_	6	K	0	3	6	2,500	T	s	0	1	s	0	2	T	0	4	ABCEFGH		
L	7	K	0	3	7	100	T	S	.0.	1	s	0	2	T	0	4	ABCEFGH		
_	8	ĸ	0	3	8	100	T	s	0	1	s	0	2	T	0	4	ABCEFGH		
	9	ĸ	0	3	9	100	T	s	: 0	1	s	0	_2	T	0	4	ABCEFGH		
1	0	K	0	4	0	100	T	s	0	1	S	0	2	T	0	4	ABCEFGH		· ···
1	1	K	0	4	1	100	T	s	0	1	s	0	2	T	0	4	ABCEFGH	<u> </u>	<u></u>
1	2	K	0	4	2	2,500	• Т	s	0	1	s	0	2	T	.0	4	ABCEFGH		
1	3	K	0	4	3	2,500	Ţ	s	0	1	s	0	2	T	0	4	ABCEFGH		
1	4	K	0	4	4	2,500	T	s	0	1	s	0	2	T	0	4	ABCEFGH		
1	5	K	0	4	5	2,500	T	s	0	1	s	0	2	T	0	4	ABCEFGH		
1	6	K	0	4	6	2,500	T	S	0	1	s	0	2	T	0	4	ABCEFGH	TOLA	·
1	7	K	0	4		2,500	T	S	0	1.	s	0	2	T	0	4	ABCEFGH		
1	8	K	0	4	8	2,500	T	s	0	1	S	0	2	T	0	4	ABCEFGH	TOLA	<u>. </u>
1	9	K	0	4	9	2,500	T	S	0	1	s	0	2	T	0	4	ABCEFGH		
2	0	K	0	5	0	2,500	T	s	0	1	s	0	2	T	0	4	ABCEFGH		
2	1	K	0	5	1	2,500	T	s	0	1	s	0	2	T	0	4	ABCEFGH		
2	2	K	0	5	2	2,500	T	s	0	1	s	Ō	2	T	0	4	ABCEFGH	TOLA	<u> </u>
2	3	K	0	6	0	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	TOLA	.
2	4	K	0	6	1	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	TO1A	<u> </u>
2	5	K	0	6	2	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	TOLA	<u> </u>
2	6	K	0	6	9	250	T	s	0	1	S	0	2	Ţ	0	4	ABCEFGH	TO1A	<u> </u>
2	7	K	0	7	1	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH		
2	8	K	0	7	3	100	T	S	0	1	Si	0	2	T	0	4	ABCEFGH		
2	9	K	0	8	3	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH		
3	٥	K	0	8	4	250	T	s	0	1	S	0	2	T	0	4	ABCEFGH		
3	1	K	0	8	5	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH		
3	2	K	0	8	6	250	T	S	0	1	S I	<u>o</u>	2	T	0	4	ABCEFGH	TOLA	
3	3	K	o	8	7	250	T	Ş١	0	1	S	0	2	T	οİ	4	ABCEFGH	TOLA	

Please	print	or typ	e wit	EL	TE t	/pë (1	2 cha	racte	8 DB1	inc	ch) in the unshad	ed areas onh	y				G	SA No. O	248-EP/
EPA I	DEN	umbe	e (Es		rom		r1)*						Second	ary ID N	umbe	c (Ente	:trom p	age:1)	
II	. D	0	0	0	6	Q	8	4	7	1									
XIV.T)escr	iption	of H	22	dou	s:We	etes.	(Cont	inue	d) :									
	1	a A	EPÀ	9.75	le.	STI	UTEL	CL	INIT	ϽF	A LA LA AMORATA EL COM	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	D. I	PROCES	SFQ :		·	Special sur	

XIV. De	ecription of Hazard						
Line «	HAZARDOUS WASTE NO.	BLESTMATED ANNUAL QUANTITY OF	C. UNIT OF MEASURE (Enter		SS CODES (E		CESSES (2) PROCESS DESCRIPTION
Number	(Enter.code)	WASTE	code)	en (AMA Maria) Al ang diganagan	nto to usuare.	.i	(If a code is not entered in D(1))
1	K 0 8 8	250	Ţ	S : 0 1	S 0 2	T 0 4	ABCEFGH
2	K 0 9 0	250	T	S 0 1	S 0 2	T: 0 4	ABCEFGH
3	K 0 9 1	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
4	K 0 9 3	250	T	S 0 1	S: 0 2	T 0 4	ABCEFGH
5	K 0 9 4	250	T	s o l	S 0 2	T 0 4	ABCEFGH
6	K 0 9 5	250	_ T	S 0 1	S 0 2	T 0 4	ABCEFGH
7	K 0 9 6	250	T	s o l	s 0 2	T 0 4	ABCEFGH
8	K 0 9 7	250	T	s 0 1	S 0 2	T 0 4	ABCEFGH
9	K 0 9 8	100	T	s 0 1	S 0 2	T 0 4	ABCEFGH
1 0	K 0 9 9	100_	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 1	K 1 0 0	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH TOLA
1 2	K 1 0 1	250	· T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 3	K 1 0 2	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 4	K 1 0 3	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 5	K 1 0 4	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 6	K 1 0 5	100	T	s 0 1	S 0 2	T 0 4	ABCEFGH
1 7	K 1 0 6	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 8	K 1 0 7	15,000	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 9	K 1 0 8	15,000	T	S 0 1	s 0 2	T 0 4	ABCEFGH
2 0	K 1 0 9	15,000	'T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 1	K 1 1 0	15,000	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 2	K 1 1 1	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 3	K 1 1 2	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 4	K 1 1 3	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 5	K 1 1 4	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 6	K 1 1 5	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 7	K 1 1 6	250	T	S 0 1	S 0 2	т 0 4	ABCEFGH
2 8	K 1 1 7	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 9	K 1 1 8	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
3 0	K 1 2 3	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
3 1	K 1 2 4	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
3 2	K 1 2 5	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
3 3	K 1 2 6	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH

Secondary ID Number (Enter from page 1) EPA LD_Number (Enter from page 1) 7 0 6 0 | 8 4 1 L ו מ 0 1 0 XIV. Description of Hazardous Westes (Continued) A STATE OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PAR A ESTWATED C. UNIT OF D. PROCESSES A EPA ANNUAL HAZARDOUS MEASURE (1) PROCESS CODES (Enter code) WASTE NO. QUANTITY OF (Enter ::: (2) PROCESS DESCRIPTION Line Numbe (Enter.code) -WASTE code) (If a code is not entered in D(1)) | 1 T 2 **0**i 15,000 0 **ABCEFGH** S: 01 2 T **0**i 2 15,000 2 T **ABCEFGH** 1 3 0 S 01 T 3 3 1 6 250 T 0 | K S ! 0 Si 0 2 ABCEFGH T 4 1 1 4 250 2 ABCEFGH K S : 0 S 0 | T 0 : 1 2 5 $\mathbf{K} \mid \mathbf{I}$ 4 250 T 0 2 Ti 0 ABCEFGH S SI 0 6 250 T ! 1 3 **ABCEFGH** S | 0 0 T ! 7 4 4 250 0.1 $\mathbf{K} \mid \mathbf{1}$ T 0 SI 0 T **ABCEFGH** 8 5 250 $\mathbf{K} \mid \mathbf{1}$ 4 2 T T S | 0 1 Si 0 01 **ABCEFGH** 9 T 7 0 2 T! 01 **ABCEFGH** 250 0 S ٥ T 0. 2 TI 01 4 8 250 0 SI **ABCEFGH** SI 1 1 0 9 T SI 0 SI 0 2 T 1 4 250 1 **ABCEFGH** 2 T 0 0 0 0 S T **ABCEFGH** 250 SI 3 T T 01 4 5 S 0 S 0 **ABCEFGH** 1 250 K 1 **ABCEFGH** T S Ť 0 n O 100 S O 0 5 T 0 T 0 P 0 0 100 S 0 S **ABCEFGH** 6 T P 0 0 3 100 S 0 S O 0 **ABCEFGH** 7 100 T 2 0 **ABCEFGH** S 0 S 0 T 4 0 4 S 0 S 0 2 T 0 4 0 T **ABCEFGH** 0 100 P 9 0 0 T 0 0 0 P 6 250 S **ABCEFGH** 2 0 0 7 P 0 100 2 0 S 0 S 0 4 **ABCEFGH** 1 250 2 0 2 0 0 T 4 T S S ABCEFGH O 2 SI 0 S 0 2 T 0 4 1 9 **ABCEFGH** P 0 0 250 2 3 S 0 S 0 2 0 4 0 250 T P 0 1 T **ABCEFGH** 4 2 2 P 0 1 250 T S ABCEFGH 1 S 0 0 01 4 2 5 P 0 1 250 T 0 0 2 0 4 S S T **ABCEFGH** 3 2 6 \mathbf{P} 0 l SIO 1 S 0 | T 0 4 T **ABCEFGH** 250 7 T \mathbf{P}^{\top} 0 4 250 0 1.0 1 0. 4 **ABCEFGH** 2 8 1 5 T 2 0 4 0 S 10 | T ABCEFGH \mathbf{P} 250 S 0 2 9 **P** ! 0 1 6 T 250 2 S | 0 | 0 Т 0.1 **ABCEFGH** 3 0 0 1 7 2 P T S | 0 | SI 0 T 0 1 4 250 ABCEFGH 8 2 1 P! 0 1 250 T S | 0 | 1 S 0 | T 0 1 4 abcefgh T 2 3 2 0 2 0 $S \mid 0$ SI 0 | T I 0 | 4 P 250 **ABCEFGH** 2 4 2 S | 0 $S \mid O \mid$ TIOI 3 3 \mathbf{P}^{\perp} 0 250 T **ABCEFGH**

EPA LD Number (Enter from page 1) Secondary ID Number (Enter from page 1) ו מ 0 0 0 6 0 | 8 4 7 XIV. Description of Hazardous Wastes (Continued) A ESTEVATED C. UNIT OF w. 2277 - ALEPA D. PROCESSES HAZARDOUS ANNUAL MEASURE Line WASTE NO. QUANTITY OF (Enter :: (1) PROCESS CODES (Enter code) (2) PROCESS DESCRIPTION Numbe WASTE code) (If a code is not entered in D(1), (Enter code) | 1 T **S** | 0 | P 2 2 2 01 0 250 0 Ti **ABCEFGH** 2 2 T S : 0 PI 0 3 S 2 Ti Oi 250 1 01 4 **ABCEFGH** 3 P 10 2 T 250 0 0 2 T 0 Si 4 **ABCEFGH** T 0 Sı 0 2 **0** i 0 2 250 S 1 T 4 6 ABCEFGH 5 2 T 2 **ABCEFGH** P 0 7 250 $S \mid 0$ T 0 S 0 4 6 T 2 P 0 8 250 ABCEFGH 0 2 T 0 0 7 \mathbf{P} 0 2 100 T 0 S 0 2 T 0 4 **ABCEFGH** 8 P 0 3 0 0 2 0 100 T Si 0 S T 4 ABCEFGH 9 T P 0 3 100 0 0 0 2 T S: 4 **ABCEFGH** ٥ P 0 3 3 T 2 0 100 0 SI 0 TI SI 4 **ABCEFGH** 1 1 0 S 0 2 0 250 T T 4 0 **ABCEFGH** 1 2 T P 0 3 6 S 0 S 0 2 T 0 100 **ABCEFGH** 3 P 0 3 7 T 0 S 0 2 0 S T 100 **ABCEFGH** 1 P 0 3 8 100 T 0 0 2 T 0 **ABCEFGH** 4 1 5 T P 0 3 9 250 0 S 0 0 T **ABCEFGH** 1 250 T 0 0 S S T 0 **ABCEFGH** 7 250 T 0 S 0 P 0 4 S T 0 **ABCEFGH** 1 2 0 1 S 0 2 T P 0 4 S 0 250 T 4 **ABCEFGH** 1 9 P 0 4 3 100 T 0 S 0 S T 0 4 ABCEFGH 2 0 0 T 0 1 Si 2 T 0 4 S 250 4 **ABCEFGH** 2 1 0 4 5 0 1 S 0 2 P S T 0 4 250 T **ABCEFGH** 2 2 250 S 0 1 SI 0 2 T 0 4 P 0 6 T ABCEFGH 2 3 P 0 4 250 0 1 S 0 2 T 0 T S ABCEFGH 2 T S P 0 8 250 S 0 0 2 T 0 4 ABCEFGH 2 5 P 9 T 0 4 100 S 0 1 SI 0 2 T 0 4 <u>ABCEFGH</u> 2 6 0 2 T P 0 5 0 100 T SI 0 1 SI 0 4 **ABCEFGH** 2 7 \mathbf{P} 0 5 100 T 0 T 0 SI 0 **ABCEFGH** 2 8 P 01 51 T S : 0 | 0 100 SI 0 | T **ABCEFGH** 9 2 P 0 5 6 250 T 0 0. T 0 **ABCEFGH** 3 0 P 0 5 7 100 T 2 S | 0 S 0 | T 0 **ABCEFGH** 3 5 8 P 0 100 T S 0 | S | 0 | 2 T 0 1 4 **ABCEFGH** 3 2 9 5 T P 0 100 $S \mid 0$ 1 $S \mid 0$ 2 T I 0 4 **ABCEFGH** 0 S 1 0 1 2 3 P 0 6 250 S | 0 1 T 0 4 ABCEFGH

Secondary ID Number (Enter from page 1) EPA LD_Number (Enter from page 1) 8 4 7 1 L 0 0 6 0 D 0 XIV. Description of Hazardous Westes (Continued) A FPA B. ESTWATED C. UNIT OF CONTRACTOR CONTRACTOR D. PROCESSES HAZARDOUS ANNUAL MEASURE QUANTITY OF Line -WASTE NO. (Enter (1) PROCESS CODES (Enter code) (2) PROCESS DESCRIPTION WASTE Numbe (Enter code) code) (If a code is not entered in D(1)) 1 1 T 250 2 01 0 S | 0 | 01 4 **ABCEFGH** | 2 250 T 0 3 2 Oi P 6 0 S Ô T **ABCEFGH** 3 T 10 6 4 P 250 0 2 T 0 $S \perp 0$ S 4 **ABCEFGH** T 4 250 P 0 6 5 **ABCEFGH** S : 0 S: 0 2 T 01 4 1 5 250 P 0 T 6 -6 4 ABCEFGH SIO S 0 T 0 6 P 0 6 7 T 100 0 0 0 ABCEFGH 7 0 6 8 P 100 T 0 0 T 0 S ABCEFGH 8 100 0 6 9 T 0 P SI 0 1 Si 0 2 T 4 **ABCEFGH** 9 P 0 7 0 T SI 0 S 0 2 T 0 100 **ABCEFGH** 1 | 0 100 T S | 0 1 0 T SI 0 4 $P \mid 0$ ABCEFGH 1 | 1 250 T S 0 S 0 2 T 0 4 O **ABCEFGH** 1 2 T 0 0 0 0. 100 S S T **ABCEFGH** 3 7 T P 0 4 100 S 0 1 S 0 2 T 0 4 **ABCEFGH** 1 100 T **ABCEFGH** P 0 S 0 0 0 5 T P 0 6 250 S 0 0 T 0 4 ABCEFGH 1 6 T 7 7 P 0 250 S 0 S 0 2 T 0 **ABCEFGH** 7 7 P 0 8 250 T S 0 S 0 2 T 0 4 **ABCEFGH** 1 8 P 0 8 1 250 T S 0 1 S 0 2 T 0 4 **ABCEFGH** 9 1 P 0 8 T S 0 0 100 S 0 **ABCEFGH** 2 ٥ P 0 8 4 T 2 S 0 0 S T 0 100 **ABCEFGH** 2 1 S 0 0 2 250 1 S T 0 R T 4 **ABCEFGH** 2 7 250 S 0 1 S 0 2 T 0 4 0 8 P T ABCEFGH 2 3 8 250 S 0 S 0 2 T Ö P 0 8 T ABCEFGH 2 4 8 9 T S 0 s l 0 2 0 250 T 0 **ABCEFGH** 4 2 5 P 0 9 2 250 T S 0 S 0 2 0 T 4 **ABCEFGH** 5 2 9 3 2 P 0 250 T SI 0 1 S 0 T 0 4 **ABCEFGH** 2 9 4 P 0 100 T 10 SI 0 0 ABCEFGH 2 8 0 91 5 T S | 0 2 P 250 S | 0 T 0 **ABCEFGH** 2 9 P 0 9 6 250 T 2 S | 0 | S 0 Ť 0 4 **ABCEFGH** 3 0 P 0 9 7 250 T $S \mid 0$ SI 0 2 T 0 <u>ABCEFGH</u> 3 P 9 100 T S | 0 | S 0 2 T 0 **ABCEFGH** 2 T 2 P 0 9 100 S | 0 | -1 S I 0 T 0 4 **ABCEFGH** 3 3 SI 0 2 T 4 0 250 $S \mid 0$ 0 ABCEFGH

EP/	A LD	New	ber	(Ent	er in	om pega 1)						d i		Sec	ond	ary I	D Numbe	z (Ent	er troa	page	1)
Į	L	D	0	0	0	6 0 8	4 7 1			} X			\								
XIV	De	crip	lon	of He	P	lous Westes (
٠.		A		PA IDOU		B.ESTRIATED ANNUAL	C. UNIT OF	145. Z.	11%	<u></u>	gartini k	Tyre?	Signal Signal Signal		0. 1	PRO	CESSES			A. Balan	
	ne nber	~ 9	/AST	E NC code	L	QUANTITY OF WASTE	(Enter ::: code)		() PA	OCE	ss c	ODE	3 (E)	nter c	ode)				ESS D		PTION In D(1))
	1	P	1_	0_	2	150	T	S	0	1	S	0	2	Ti	0	4	ABCE	FGH			<u></u>
	2	P_	1_	0	3	100	T	s	0	1	S	0	2	T	O i	4	ABCE	FGH			
	3	P	1_	0	4	100	T	S	0	1	s	0	2	T	0	4	ABCE	FGH_			<u>. </u>
	4	P	1	0	5	100	T	S	0	1	S	0	2	T	0	4	ABCE	FGH			
	5	P	1	0	6	100	T	s	0	1	S	0	2	T	0	4	ABCE	FGH_		·	
	6	P	1_	0	8	100	T	S	0	1	S	0	2	T	0	4	ABCE	FGH			
	7	P	1	0	9	100	T	s	0	1	S	0	2	T	0	4	ABCE	FGH_			
	8	P	1	1	0	250	T.	s	0	1	S	0	2	T	0	4	ABCE	FGH			
	9	P	1_	1	1	250	T	S	0	1	S	0	2	T	0	4	ABCE	FGH			
1	0	P	1	1	2	250	Ţ	S	0	1	S	0	2	T	0	4	ABCE	FGH_			
1	1	P	1	1	3	250	T	s	0	1	s	0	2	T	0	4	ABCE	FGH			-
1	2	P.	1	1	4	250	· T	s	0	1	s	0	2	T	0	4	ABCE	FGH_			
1	3	P	1	1	5	250	T	s	0	1	s	0	2	T	0	4	ABCE	FGH			
1	4	P	1	1	6	250	T	s	0	1	s	0	2	T	0	4	ABCE	FGH		·	
1	5	P	1	1	8	250	T	s	0	1	s	0	2	T	0	4	ABCE	FGH			
1	8	P	1	1	9	100	T	s	0	1	s	0	2	T	0	4	ABCE	FGH			
1	7	P	1	2	0	250	T	s	Ò	1	s	0	2	T	0	4	ABCE	FGH			
1	8	P	1	2	1	250	T	s	0	1	s	0	2	T	0	4	ABCE	FGH_			
1	9	P	1	_ 2	2	250	T	s	0	1	s	0	2	T	0	4	ABCE	FGH_			
2	0	P	1	2	3	250	T	s	0	1	s	0	2	T	0	4	ABCE	FCH	· -		
2	1	U	0	0	1	250	T	s	0	1	S	0	2	T	0	4	ABCE	FGH		- :	
2	2	U	0	0	2	250	T	s	0	1	s	0	2	T	0	4	ABCE	FGH			
2	3	U	0	Ó	3	250	Т	s	0	1	s	0	2	T	0	4	ABCE	FGH_			
2	4	U	0	0	4	250	T	s	0	1	s	0	2	T	0	4	ABCE	FGH			
2	5	U	0	0	5	250	T	s	0	1	s	0	2	T	0	4	ABCE	FGH			 ,
2	6	U	0	0	6	100	T	s	0	1	s	0	2	T	0	4	ABCE	FGH			
2	7	U	0	0	7	250	Т	s	0	1	s	0	2	T	0	4	ABCE	FGH			
2	8	Ū	0	O	8	250	T	s	0	1	s	0	2	T	0	4	ABCE	FGH			
2	9	Ū	0	0	9	250	T	s	0	1	s	0	2	T	0	4	ABCE	FGH			
3	0	IJ	0	1	0	250	T	S	0	1	S	0	2	T	0	4	ABCE	FGH			
3	1	U	0	1	1	250	T	S	0	1	S	0	2	T	0	4	ABCE	FGH			
3	2	σ	0	1	2	250	T	S	0	l	S	0	2	T	0	4	ABCE	FGH			
3	3	σ	0	1	4	250	T	S	0	1	S	0	2	T	0	4	ABCE				

				om page 1)		1	Seo areas original		ID Number (Enter from page 1)
\vdash	L	DOC		6 0 8	4 7 1				
-			تعيينا	ious Wastes (Continued)				07
		- A.EP HAZARD		B. ESTRATED	C. UNIT OF MEASURE	NAWA BELL		D. PRO	CESSES
	ine	WASTE	NO.	QUANTITY OF	(Enter	(1) PROCL	SS CODES (E	nter code)	(2) PROCESS DESCRIPTION
מא	mber	(Enter o		WASTE	code)	2011			(If a code is not entered in D(1))
-	1		1 5	250	T	S 0 1	S 0 2		
-	2	Δ 0	1 6	250	T	S 0 1	S 0 2	TI 01 4	ABCEFGH
-	3	0 O	1 7	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
_	4	0 0	1 8	250	T	S 0 1	S: 0 2	T 0 4	ABCEFGH
<u> </u>	5	ប 0	1 9	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
<u> </u> _	6	υ ο :	2 0	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
<u> </u>	7	ט ס :	2 1	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
<u> </u>	8	ט ס	2 2	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
<u> </u>	9	ם ס	2 3	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1	0	T O	2 4	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1	1	ט ס	2 5	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1	2	U 0 :	2 6	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1	3	υ ο :	2 7	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1	4	υ 0	2 8	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1	5	υ ο :	2 9	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1	6	υ ο	3 0	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1	7	U 0	3 1	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1	8	U 0	3 2	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1	9	ช 0	3 3	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	0	υ ο :	3 4	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	1	ט ס	3 5	250	T	S 0 1	s 0 2	T 0 4	ABCEFGH
2	2	ט ס	3 6	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	3	σ ο :	3 7	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	4	U O	3 8	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	5	ប ០	3 9	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	6	ס ס	4 1	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	7	U O	4 2	250	T	S 0 1	s 0 2	T 0 4	ABCEFGH
2	8	υ ο	4 3	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	9	πο	4 4	250	Т	S 0 1	S 0 2	T 0 4	ABCEFGH
3	0	ט ט	4 5	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
3	1	i	4 6	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
3	2		4 7	250	T	S 0 1	S 0 2	T 0 4	ABCEFGE
3	3	σο	4 8	250	т	S 0 1	S 0 2	T 0 4	ABCEFGH

 EPA LD: Number (Enter from page 1)
 Secondary ID Number (Enter from page 1)

 I L D 0 0 0 6 0 8 4 7 1

XIV. De	ecription of Hazan	ious Wastes (Continued)				
	HAZARDOUS	B. ESTRIATED ANNUAL OUANTITY OF	MEASURE		ESS CODES (E		CESSES
Line : Number	WASTE NO. (Enter.code)	WASTE	code)	(I)PHOC	:33 <i>COVE</i> 3 (E	nter coos)	(2) PROCESS DESCRIPTION (If a code is not entered in D(1))
i 1	U 0 4 9	250	Ţ	S 0 1	S 0 2	T: 01 4	ABCEFGH
2	σ 0 5 0	250	Ť	S: 0 1	S 0 2	T 0 4	ABCEFGH
3	υ 0 5 1	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
4	U 0 5 2	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
5	U 0 5 3	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
6	U 0 5 5	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
7	ช 0 5 6	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
8	υ 0 5 7	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
9	υ 0 5 8	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 0	υ 0 5 9	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 1	U 0 6 0	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 2	υ 0 6 1	100	· T	S 0 1	s 0 2	T 0 4	ABCEFGH
1 3	U 0 6 2	250	T	S 0 1	S 0 2	T 0 4	ABCEPCH
1 4	บ 0 6 3	250	τ	S 0 1	S 0 2	T 0 4	ABCEPGH
1 5	U 0 6 4	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 6	υ 0 6 6	250	T	s 0 1	S 0 2	T 0 4	ABCEFGH
1 7	U 0 6 7	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 8	υ 0 6 8	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 9	υ 0 6 9	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 0	U 0 7 0	250	T	S 0 1	S 0 2	T 0 4	ABCEPGH
2 1	υ 0 7 1	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 2	<u></u>	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 3	σ 0 7 3	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 4	ช 0 7 4	250	Ţ	S 0 1	S 0 2	T 0 4	ABCEFGH
2 5	σ 0 7 5	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 6	υ 0 7 6	250	T	S 0 1	s 0 2	T 0 4	ABCEFGH
2 7	ช 0 7 7	250	T	s 0 1	S 0 2	T 0 4	ABCEFGH
2 8	ช 0 7 8	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 9	υ 0 7 9	250	T	S 0 1	S 1 0 2	T 0 4	ABCEFGH
3 0	บ 0 8 0	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
3 1	U 0 8 1	250	т	S 0 1	S 0 2	T 0 4	ABCEFGH
3 2	U 0 8 2	250	Ţ	S 0 1	S 0 2	T 0 4	ARCEFGH
3 3	ס 0 8 3	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH

	D. Number (En					ing and that his age.	Secondary	ID Number (Enter from page 1)
IL	D 0 0	0	6 0 8	4 7 1				
XIV. D	escription of H	8235	lous Wester (Continued)				
	-ALEPA HAZARDO		B.ESTMATED ANNUAL	C. UNIT OF MEASURE	To a constitu	operation and participation of	D. PRO	CESSES
Line Numbe	WASTE N		QUANTITY OF WASTE	(Enter :: :code)	(1) PROCE	SS CODES (E	nter code)	(2) PROCESS DESCRIPTION (If a code is not entered in D(1))
1		•	250	T	S 0 1	S 0 2	T: 0 4	ABCEFGH
2		5	250	T	S 0 1 S 0 1	S 0 2	T 0 4	ABCEFGH
3		6	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
4		7	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
5	 	8	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
6		9	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
7		0	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
8	U 0 9	1	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
9	υ 0 9	2	 	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 0		3		T	S 0 1	S 0 2		ABCEFGH
1 1	υ 0 9	4		T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 2	 	5		·T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 3		6	250	T	S 0 1	s 0 2	T 0 4	ABCEFGH
1 4	σ 0 9	7	100	т	S 0 1	s 0 2	T 0 4	ABCEFGH
1 5		8	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 6	U 0 9	9	250	Ţ	S 0 1	S 0 2	T 0 4	ABCEFGH
1 7	U 1 0	1	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 8	U 1 0	2	250	т	S 0 1	S 0 2	T 0 4	ABCEFGH
1 9	U 1 0	3		T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 0		5	250	T	S 0 1	S 0 2		ABCEFGH
2 1	U 1 0	6	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 2	U 1 0	7	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 3	U 1 0	8	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 4	บ 1 0	9	250	T	s 0 1	S 0 2	T 0 4	ABCEFGH
2 5	U 1 1	0	250	T	s 0 1	S 0 2	T 0 4	ABCEFGH
2 6	U 1 1	1	100	T.	S 0 1	s 0 2	T 0 4	ABCEFGH
2 7	U 1 1	2	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 8	U 1 1	3	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 9	Ü 1 1	4	250	т	S 0 1	S 0 2	T 0 4	ABCEFGH
3 0	U 1 1	5	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
3 1	U 1 1	6	250	T	S 0 1	S: 0 2	T 0 4	ABCEFGH
3 2	טון	7	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
3 3	v 1 1	8	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH

EPA LD	. Number (Enter tr	om pege 1)				Secondary I	D Number (Enter from page 1)
IL	D 0 0 0	6 0 8	4 7 1				
XIV. De	scription of Hazard	ious Wastes (Continued)				
Line ··· Number	A.EPA HAZARDOUS WASTE NO. (Enter code)	B. ESTIMATED ANNUAL QUANTITY OF WASTE	C. UNIT OF MEASURE (Enter code)	(1) PROCE	SS CODES (E		(2) PROCESS DESCRIPTION (If a code is not entered in D(1))
1	Ū 1 1 9	250	T	S 0 1	S 0 2	T: 0: 4	ABCEFGH
2	U 1 2 0	250	T	S: 0 1	S 0 2	T 0 4	ABCEFGH
3	U 1 2 1	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
4	บ 1 2 2	250	T	s 0 1	S 0 2	T 0 4	ABCEFGH
5	บ 1 2 3	100	T	s 0 1	s 0 2	T 0 4	ABCEFGH
6	U 1 2 4	250	T	S 0 1	S 0 2	т 0 4	ABCEFGH
7	Ū 1 2 5	250	T	s 0 1	s 0 2	T 0 4	ABCEFGH
8	U 1 2 6	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
9	U 1 2 7	250	T	S 0 1	S 0 2	т 0 4	ABCEFGH
1 0	บ 1 2 8	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 1	บ 1 2 9	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 2	U 1 3 0	250	·T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 3	Π 1 3 1	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 4	U 1 3 2	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 5	0 1 3 3	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 8	U 1 3 4	100	Ţ	S 0 1	S 0 2	T 0 4	ABCEFGH
1 7	υ 1 3 5	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 8	U 1 3 6	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1 9	Π 1 3 7	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 0	υ 1 3 8	250	T.	S 0 1	S 0 2	T 0 4	ABCEFGH
2 1	U 1 4 0	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 2	U 1 4 1	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 3	U 1 4 2	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 4	0 1 4 3	100	T.	S 0 1	S 0 2	T 0 4	ABCEFGH
2 5	U 1 4 4	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 6	υ 1 4 5	250	Ţ	S 0 1	S 0 2	T 0 4	ABCEFGH
2 7	U 1 4 6	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 8	U 1 4 7	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2 9	บ 1 4 8	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
3 0	บ 1 4 9	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
3 1	บ 1 5 0	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
3 2	<u>v</u> 1 5 1	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
3 i 3	บ ! 1 5 2	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH

EP	A LD	Number	Ent	er tr	om page 1)				Secondary	ID Number (Enter from page 1)
I	L			0	6 0 8	4 7 1				
XT	/. De	scription o	f Ha	231	ious Wastes (Continued)				
	- · · · · · · · · · · · · · · · · · · ·	- A.E. HAZARI			B. ESTIMATED ANNUAL	C. UNIT OF		egerez erzőső.	D. PRO	CESSES
_	ine mber	WASTE (Enter	NO	.	QUANTITY OF WASTE	(Enter	(1) PROCE	SS CODES (E	inter code)	(2) PROCESS DESCRIPTION (If a code is not entered in D(1))
	1	(Eller)		_						
\vdash	!	0 1	5		250	Ţ	S 0 1	S 0 2		
┝	2	U 1	5	4	250	T	S 0 1	S 0 2		
┝	3	0 1	5	5	250	T	S O 1	S 0 2		
<u> </u>	4	n I	5	6	100	T	S 0 1	S 0 2	T 0 4	
-	5	0 1	5	7	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
<u> </u>	6	U 1	5	8	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
_	7	Üİ	5	9	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
	8	0 1	6	0	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
_	9	0 1	6	1	250	T	S 0 1	S 0 2	т 0 4	ABCEFGH
1	0	U 1	6	2	250	T_	S 0 1	S 0 2	T 0 4	ABCEFGH
1	1	U 1	6	3	250	T	s 0 1	S 0 2	T 0 4	ABCEFGH
1	2	υ 1	6	4	250	·T	S 0 1	s 0 2	T 0 4	ABCEFGH
1	3	υ 1	6	5	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1	4	υ 1	6	6	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1	5	U 1	6	7	250	T	S 0 1	S 0 2	т 0 4	ABCEFGH
1	6	υ 1	6	8	250	Ţ	S 0 1	S 0 2	T 0 4	ABCEFGH
1	7	ט ו	6	9	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1	8	σ 1	7	0	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
1	9	U 1	7	1	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	0	v 1	7	2	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	1	U 1	7	3	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	2	v 1	7	4	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	3	U 1	7	6	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	4	U 1	7	7	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	5	U 1	7	8	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	6	U 1	7	9	100	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	7	v 1	8	0	250	Т	S 0 1	S 0 2	T 0 4	ABCEFGH
2	8	ט ו	8	1	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
2	9	υl	8	2	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
3	0	U 1	8	3	250	T	S 0 1	s 0 2	T 0 4	ABCEFGH
3	1	v 1	8	4	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH
3	2	U 1	8	5	250	Ţ	S 0 1	S 0 2	T 0 4	ABCEFGH
3	3	v ! 1	8	6	250	T	S 0 1	S 0 2	T 0 4	ABCEFGH

EPA LD. Number (Enter from page 1) Secondary ID Number (Enter from page 1) 7 4 0 0 8 1 L D 0 6 0 XIV. Description of Hazardous Wastes (Continued) A ESTWATED C. UNIT OF ... EPA D. PROCESSES MEASURE HAZARDOUS ANNUAL (1) PROCESS CODES (Enter code) WASTE NO. QUANTITY OF (Enter (2) PROCESS DESCRIPTION WASTE (Enter code) code) Numbe (If a code is not entered in D(1)) 1 T 7 250 2 01 U 8 0 01 T1 4 **ABCEFGH** 2 T 250 2 S 01 **0**i 4 **ABCEFGH** U 8 8 S 0 1 TI 3 T 8 9 U - 1 250 $S \perp 0$ 0 2 T 0 4 **ABCEFGH** 4 T 9 0 2 T 0 П O 100 SO 1 S 4 ABCEFGH 5 9 T ABCEFGH U | 1 1 250 2 0 0 0 TI 4 SI 6 T 2 U 1 9 $S \perp 0$ 0 0 4 **ABCEFGH** 250 S 7 9 3 U T 0 T 0 **ABCEFGH** 250 S 0 S 4 8 9 UIL 4 0 2 250 T SI 0 1 S T 0 4 **ABCEFGH** 9 9 $\mathbf{U} + \mathbf{1}$ 6 250 T S 1 0 S 0 2 T 0 4 **ABCEFGH** 0 7 0 2 U: 1 Q 250 T S | 0 S T 0 4 ABCEFGH 1 0 2 T 0 4 υi 2 0 0 250 T SI 0 1 S **ABCEFGH** 2 2 T U 0 100 0 T 0 S 0 4 **ABCEFGH** 3 2 U 0 250 T 0 S 0 S 0 2 T 4 **ABCEFGH** 250 **ABCEFGH** T S 0 T 0 0 S 4 5 T 2 100 S 0 2 T 0 П 0 0 S 4 ABCEFGH 1 6 2 T S 0 S U. 0 5 250 0 0 **ABCEFGH** 7 П 2 0 6 250 T S 0 S 0 2 T 0 4 **ABCEFGH** 2 U 0 7 250 S T Ó T S I 0 1 0 2 4 **ABCEFGH** 9 2 U 0 8 250 T S 0 S 0 2 0 4 **ABCEFGH** 0 250 T S 0 S 2 T 0 0 0 **ABCEFGH** 2 1 2 2 T S 0 S 0 T 0 U 0 250 **ABCEFGH** 2 S 0 S 0 2 T 0 2 250 1 4 U ABCEFGH 3 U 2 1 3 250 S 0 s i 0 2 T 0 4 **ABCEFGH** 2 2 4 100 T Ú S 0 S 0 0 **ABCEFGH** 2 5 U 2 1 5 250 T 2 Ó S 0 S 0 T 4 ABCEFGH 6 וס 2 1 6 250 S | 0 S 0 2 T 0 1 4 T **ABCEFGH** 2 7 2 7 U 1 250 2 T S | 0 0 0 4 **ABCEFGH** 2 8 2 U 1 8 T S | 0 S | 0 | 2 T 0 250 4 **ABCEFGH** 2 9 2 U 250 T 0 0 $S \mid 0$ **ABCEFGH** 3 0 2 250 T 2 0 T 0 S | 0 S: 0 **ABCEFGH** 3 2 250 2 י ס T S | 0 0 T 0 S 4 ABCEFGH 3 2 2 2 2 250 T 2 S | 0 SI 0 \mathbf{T} 0 UI 1 4 **ABCEFGH** S | 0 | 3 3 U 2 SiO 2 T 0 4 250 ABCEFGH

EP	A LD	Man	bes	(Ent	er tr	om page 1)			893E				Karan Lagranda A	Sec	cond	агу:	ID Number (Enter from page 1)	_
I	L	D	o	0	0	6 0 8	4 7 1				i dilan	9. (9. 8.,23. <u>-</u>				;		
VIX). De	cripti	on	of Ha	247	ious Wastes (Continued)		•								(_)	P
	1 2 3 1 3 1 3 1 3			PA DOU		B. ESTIMATED	C. UNIT OF	545. 548.00	ai diy		niệ gặt.	ř.			D. J	PRO	CESSES	
. —	ne nber	· W.	AST	ENC	.	QUANTITY OF		C	1) PR	OCE	ss c	ODE	'S (E)	nter c	ode)		(2) PROCESS DESCRIPTION (If a code is not entered in D(1)	
Nun		(E	_		<u> </u>			3 47										<u></u>
	1	Ū		2	5	250	T	S	0	1	S	1	2	T		4		
\vdash	2	υ:	2	2	6	250	T	S	0	1	S	0		T		4		—
Ŀ	3	U	2	2	7	250	T	S	0	1	S	0	2	T	i	_4	<u> </u>	—
	4	U	2	2	8	250	T	S	0	1	S	0	2	T	<u>0 i</u>	4		
	5	U	2	3	4	250	T	S	0	. 1	S	0	2	T!	0	4	ABCEFGH	
	6	U	2	3	5	250	T	s	0	1	S	0.	2	T	0	4	ABCEFGH	
	7	U	2	3	6	250	T	S	0	1	S	_0	2	T	0	4	ABCEFGH	
	8	U	2	3	7	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	
	9	σ	2	3	8	250	T	S	0	1	S	0	2	T	0	_4	ABCEFGH	<u> </u>
1	0	Ū	2	3	9	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	
1	1	σ	2	4	0	250	T	S	0	1	s	0	2	T	0	4	ABCEFGH	
1	2	U	2	4	3	250	·Ť	S	0	1	S	0	2	T	0	4	ABCEFGH	
1	3	U	2	4	4	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	
1	4	U	2	4	6	250	T	S	0	1	s	0	2	T	0	4	ABCEFGH	
1	5	U	2	4	7	250	T	S	0	1	s	0	2	T	0	4	ABCEFGH	
1	6	U	2	4	8	250	T	S	0	1	s	0	_2	T	.0	4	ABCEFGH	
1	7	σ	2	4	9	250	T	S	0	1	s	Ò	2	T	0	4	ABCEFGH	
1	8	σ	3	2	8	250	T	S	0	1	s	0	2	T	0	4	ABCEFGH	
1	9	U	3	5	3	250	T	S	0	1	S	0	2	T	0	4	ABCEFGH	
2	0	ט	3	5	9	250	T	s	0	1	s	Ó	2	T	0	4	ABCEFGH	
2	1	F	0	0	2	7,500	T	S	0	1	S	0	2	T	0	4	ABCEFGH TO1A	
2	2	K	0	6	4	250	T	S	0	1	s	0	2	T	Ò	4	ABCEFGH	
2	3	ĸ	0	6	5	250	T	s	0	1	s	0	2	T	0	4	ABCEFGH	
2	4	ĸ	0	6	6	250	T	S	0	1	s	0	2	T	0	4	ABCEFGH	
2	5	K	1	5	6	250	Ţ	s	0	1	S	0	2	T	0	4	ABEFGH	
2	6	K	1	5	7	250	T	S	0	1	s	0	2	T	0	4	ABEFGH	
2	7	K	1	5	8	250	Ť	S	0	1	S	0	2	T	0	4	ABEFGH	
2	8	K	1	5	9	250	T	S	0	1	S	0	2	T	0	4	ABEFGH	
2	9	K	1	6	0	250	T	S	0	1	s	0	2	T	0_	4	ABEFGH	
3	0	K	1	6	_1	250	T	S	0	i	s	0	2	T	0	4	ABEFGH	
3	1	ט	2	7	1	250	Т	S	0	1	S.i	0	2	T	0	4	ABEFGH	y
3	2	ט	2	7	7		T	S	0	1	S 1	0	2	T	0	4	ABEFGH	
3	3	ָּט	2	7	8	250	T	S	0	1	SI	0	2	T	0	4	ABEEGH	

EP/	A LD	Nember	:(En	et fr	om page 1)	7.30						Acres 1400	Sec	one	ary	ID Number (Enter from page 1)
1	L	ם ס	0	0	6 0 8	4 7 1				(10.44) (1.45) (2.46) (2.46)		Oyak.				
XIV	De	cription	of H		ious Wastes (Continued)		→								
Li Nun	ne nber	HAZAI WASI (Enter	RDO(/5 * 2	BLESTEMATED ANNUAL QUANTITY OF WASTE	C. UNIT OF MEASURE (Enter code)	1.7975			SS C			nter c	_	,.	CESSES (2) PROCESS DESCRIPTION (If a code is not entered in D(1))
	1	ប : 2	7	9	250	T	s	0	1	Si	0	2	T	0	4	ABEFGH
	2	ប : 2	8	0	250	T	S	0	1	S	0	2	T	0	4	ABEFGH
	3	υ 3	6	4	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
	4	บ ! 3	6	5	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
	5	υ 3	6	6	250	T	S	0	1	s	Ó	2	T	0	4	Abefgh
	6	υ 3	6	7	250	T	s	0	ı	s	0	2	T	0	4	ABEFGH
	7	ช 3	7	2	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
	8	U 3	7	3	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
	9	υ 3	7	5	250	T	s	0	1	S	0	2	T	0	4	ABEFGH
1	0	บ ่ 3	7	6	250	T	S	0	1	S	0	2	T	0	4	ABEFGH
1	1	υ 3	7	7	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
1	2	υ 3	7	8	250	·T	s	0	1	s	0	2	T	0	4	ABEFGH
1	3	σ 3	7	9	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
1	4	υ 3	8	1	250	T	S	0	1	s	0	2	T	0	4	ABEFGR
1	5	ช 3	8	2	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
1	6	υ 3	8	3	250	T	S	0	1	s	0	2	T	0	4.	ABEFGH
1	7	υ 3	8	4	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
1	8	ช 3	8	5	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
1	8	ช 3	8	6	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
2	0	ช 3	8	7	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
2	1	ช 3	8	9	250	Ţ	S	0	1	S	0	2	T	0	4	ABEFGH
2	2	υ 3	9	0	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
2	3	<u>υ 3</u>	9	1	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
2	4	υ 3	9	2	250	T	s	0	1	s	0	2	T	0	4	ABEFGH
2	5	U 3	9	3	250	T	s	0	1	S	0	2	T	0	_4	ABEFGH
2	6	п 3	9	4	250	T	S	0	1	S	0	2	Ţ	0	4	ABEFGH
2	7	ช 3	9	5	250	T	S	0	1	S	0	2	T	0	4	ABEFGH
2	8	<u>U 3</u>	9	6	250	T	S	0	1	S	0	2	T	0	4	ABEFGH
2	9	<u>U 4</u>	0	0	250	T	S	0	1	S	0	2	T	0	4	ABEFGH
3	0	υ 4	0	1	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
3	1	U 4	0	2	250	T	S	0	1	S	0	2	T	0	4	ABEFGH
3	2	ช 4	0	3	250	т	S	0	1	S	0	2	T	0	4	ABEFGH
3	3	ช 4	0	4	250	T	S	0	1	S	0	2	T	0	4	ABEFGH


EP	A LD	. Numb	er (l	nh	ec tr	om page 1)		7. 19.5 15. 19.5		100°		5 -655 76. 76		Sec	conc	lary	ID Number (Entertion page 1)
I	L	DO	()	0	6 0 8	4 7 1		1971			V Vae	e al	_			
XI	/?De	ecriptic	nof	Hæ	ZBF(ious Westes (Continued)										
	ادها المنظمة الرقية المادار	HAZ	EP	A		B. ESTIMATED ANNUAL	C. UNIT OF MEASURE	Y	4 3 0	tribur English	mikin)			24	D.	PRC	CESSES
	ine	WA	STE	NO.		QUANTITY OF	(Enter		1) PF	OCE	ess c	ODE	3 (E	nter c	ode,) S. T.	(2) PROCESS DESCRIPTION
NUI	nber	(En	er.c		,	WASTE	code)			*** <u>.</u> *		: : ::					(If a code is not entered in D(1))
-	1	<u>U 4</u>)	7	25 0	T	S	0	1	S	1	_2	T			
-	2	U 4	()	9	250	T	S	: 0	1	S	_0	_2	T	0	4	ABEFGH
<u></u>	3	U 4		L	0	250	T	S	0	1	S	0	2	T	0	4	ABEFGH
<u></u>	4	U 14		<u> </u>	1	250	T	S	0	1	S	0	2	T	0	4	ABEFGH
<u></u>	5	P 1		2	7	250	T.	S	0	1	S	0	2	T	0	4	ABEFGH
	6	P		2	8	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
<u></u>	7	P		3	5	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
	8	P		B	8	250	T	S	0	1	S	0	2	T	0	4	ABEFGH
Ŀ	9	P 1		<u> 8</u>	9	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
1	0	P 1		9	0	250	T	S	10	1	S	0	2	T	0	4	ABEFGH
1	1	P		9	1	250	T	S	0	1	s	0	2	T	0	4	ABEFCH
1	2	P		9	2	250	· T	S	0	1	s	0	2	T	0	4	ABEFGH
1	3	P		9	4	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
1	4	P		9	6	250	T	S	0	1	S	0	2	T	0	4	ABEFGH
1	5	P		9	7	250	T	s	0	1	S	0	2	T	0	4	
1	6	P	ı İ	9	8	250	T	S	0	1	S	0	2	T	0	4	ABEFGH
1	7	P		9	9	250	T	S	0	1	s	0	2	T	0	4	ABEFGH
1	8	P	2 (ó	1	250	т	S	0	1	s	0	2	T	0	4	ABEFGH
1	9	P	Ī	\neg		250	т		0	1			2			4	ABEFGH
2	0		Ī	0	3	250	T		0	1	S	Ī	2	T	0	4	
2	1			0	4	250	т		0	1	s	0	2	T	0	4	
2	2		_	0	5	250	T		0	1	s	0	2	T	0	4	ABEFGH
2	3		+	\top			-	-	<u> </u>							-	AND CO.
2	4			+					: l								
2	5			\dagger				-	:					H		7.	
2	6		1	+	\exists				! !					 			· · · · · · · · · · · · · · · · · · ·
2	7	1	+	+	\exists				-			-	_				
2	8		+	+						\dashv		- !		'			<u> </u>
2			+	$\frac{1}{1}$	\dashv								╣	-!			
3	0	:	1	+	\dashv									!			
\vdash		:		-	\dashv			 -	:				{			- 5	
3	1		+-		ᅱ						<u> </u>	!		<u>!</u>	<u>!</u>		
3	- 		+	+	\dashv	· ·	·			_				1	<u> </u>	\dashv	
3	3	:	_!								l	!	1	i			

业工作TT	
EPA LD. Number (Enter from page 1)	econdary ID Number (Enter from page 1)
L L D 0 0 0 6 0 8 4 7 1	
V. Map	1 030000 80 277 1 00000 00000 00000
Attach to this application a topographic map, or other equivalent map, of the area extended boundaries. The map must show the outline of the facility, the location of each of its estructures, each of its hazardous waste treatment, storage, or disposal facilities, and conclude all springs, rivers and other surface water bodies in this map area. See instru	ending to at least one mile beyond property existing and proposed intake and discharge each well where it injects fluids underground.
(VI. Facility Drawing	
All existing facilities must include a scale drawing of the facility (see instructions for r	nore detail).
(VII. Photographs.	
All existing facilities must include photographs (aerial or ground-level) that clearly del treatment and disposal areas; and sites of future storage, treatment or disposal areas	lineate all existing structures; existing storage,
(VIIL Certification(s)	
cnowing violations.	
wner Signature (IMI) 27/	Date Signed
lame and Official Title (Type or print)	90/96
ame and Official Title (Type or print) Anthony G. Ianello, Exec. Dir., IL	90/96
darme and Official Title (Type or print) Anthony G. Ianello, Exec. Dir., IL	Int'l. Port District - Owner
Anthony G. Ianello, Exec. Dir., IL where Signature Jame and Official Title (Type or print)	Int'l. Port District - Owner Date Signed
Anthony G. Ianello, Exec. Dir., IL Owner Signature Jame and Official Title (Type or print) Operator Signature	Int'1. Port District - Owner Date Signed Date Signed
Anthony G. Ianello, Exec. Dir., IL Owner Signature Jame and Official Title (Type or print) Operator Signature Jame and Official Title (Type or print) Richard J. Lavoie, V.P. CHSI - Oper	Int'l. Port District - Owner Date Signed Date Signed
Anthony G. Ianello, Exec. Dir., IL Owner Signature Hame and Official Title (Type or print) Operator Signature Hame and Official Title (Type or print) Richard J. Lavoie, V.P. CHSI - Oper Operator Signature	Int'1. Port District - Owner Date Signed Date Signed
Anthony G. Ianello, Exec. Dir., IL Owner Signature Itame and Official Title (Type or print) Operator Signature Itame and Official Title (Type or print) Richard J. Lavoie, V.P. CHSI – Oper Operator Signature Itame and Official Title (Type or print)	Int'l. Port District - Owner Date Signed Date Signed
Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., Il Anthony G. Ianello, Exec. Dir., Il Anthony G. Ianello, Exec. Dir., Il Anthony G. Ianello, Exec. Dir.	Int'l. Port District - Owner Date Signed Date Signed
Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., IL Anthony G. Ianello, Exec. Dir., Il Anthony G. Ianello, Exec. Dir., Il Anthony G. Ianello, Exec. Dir., Il Anthony G. Ianello, Exec. Dir.	Int'l. Port District - Owner Date Signed Date Signed
Name and Official Title (Type or print) Anthony G. Ianello, Exec. Dir., IL Owner Signature Name and Official Title (Type or print) Operator Signature Name and Official Title (Type or print) Richard J. Lavoie, V.P. CHSI — Oper Operator Signature Name and Official Title (Type or print)	Int'l. Port District - Owner Date Signed Date Signed
Anthony G. Ianello, Exec. Dir., IL Owner Signature Jame and Official Title (Type or print) Operator Signature Jame and Official Title (Type or print) Richard J. Lavoie, V.P. CHSI – Oper Operator Signature Jame and Official Title (Type or print) Javan Jame and Official Title (Type or print) Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Jav	Int'l. Port District - Owner Date Signed Date Signed
Anthony G. Ianello, Exec. Dir., IL Owner Signature Jame and Official Title (Type or print) Operator Signature Jame and Official Title (Type or print) Richard J. Lavoie, V.P. CHSI – Oper Operator Signature Jame and Official Title (Type or print) Javan Jame and Official Title (Type or print) Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Javan Jav	Int'l. Port District - Owner Date Signed Date Signed
Name and Official Title (Type or print) Anthony G. Ianello, Exec. Dir., IL Owner Signature Name and Official Title (Type or print) Operator Signature Clame and Official Title (Type or print) Richard J. Lavoie, V.P. CHSI — Oper Operator Signature Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward Jaward	Int'l. Port District - Owner Date Signed Date Signed
Name and Official Title (Type or print) Anthony G. Ianello, Exec. Dir., IL Owner Signature Name and Official Title (Type or print) Operator Signature Operator Signature Operator Signature Operator Signature Javoie, V.P. CHSI — Oper Operator Signature Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie Javoie J	Int'l. Port District - Owner Date Signed Date Signed
Name and Official Title (Type or print) Anthony G. Ianello, Exec. Dir., IL Owner Signature Name and Official Title (Type or print) Operator Signature Name and Official Title (Type or print) Richard J. Lavoie, V.P. CHSI — Oper Operator Signature Name and Official Title (Type or print) Name and Official Title (Type or print)	Int'l. Port District - Owner Date Signed Date Signed

Note: Mail completed form to the appropriate EPA Regional or State Office. (Refer to instructions for more information)

Clean Harbors Services, Inc. EPA ID No. ILD000608471 Sheet 1 of 2

RCRA PART A FORM ADDITIONAL INFORMATION



Section VIII. Facility Owner

A. Name of Facility's Legal Owner

CHSI is the owner/operator of the hazardous waste facility. The land on which the facility is located is owned by the Illinois International Port District, a government entity.

Section XII. Process Codes and Design Capacity

Line 04. Disposal in Surface Impoundments (D83)

CHSI notes that the four (4) surface impoundments identified by this entry have been certified as closed by the IL EPA. The impoundments no longer accept hazardous waste, and currently operate under an approved Post Closure management plan. A list of the waste codes which were disposed in the impoundments is included in Appendix D-30 of the approved RCRA Part B Application.

Section XIII. Additional Treatment Processes

Line 11. T04E - Treatment of D002 Liquids in Containers and Tanks

Treatment of D002 (Corrosive) liquid hazardous waste in containers and tanks by the commingling/mixing of compatible waste streams to adjust pH value. Process design capacity is 416,075 gallons per day in all tank or container systems at the facility.

Line 12. T04F - Treatment of Organic Peroxides in Containers

Treatment of organic peroxide hazardous waste in containers through the addition of water. Process design capacity is 5,000 gallons per day in any container at the facility.

Line 13. T04G - Treatment of Acid Cyanides in Containers

Treatment of acid cyanide hazardous waste in containers through pH adjustment using sodium hydroxide or other alkaline materials. Process design capacity is 5,000 gallons per day in any container at the facility.

Clean Harbors Services, Inc. EPA ID No. ILD000608471 Sheet 2 of 2

Line 14. T04H - Treatment of Hazardous Waste in Containers and Tanks Using Phase Separation

Treatment of hazardous waste in containers and tanks by phase separation using physical (e.g., gravity separation, filtration) and chemical (e.g., addition of demulsifiers) techniques. Process design capacity is 416,075 gallons per day in all tank or container systems at the facility.

Section XIV. Description of Hazardous Waste

CHSI notes that Process Code "TO1A" in Column D(2) refers to the Listed Waste Treatment System identified on Line 06 in Section XII.

CHSI also notes that Process Codes "T04A" through "T04H" refer to the various container and/or tank treatment processes described in Lines 07 through 14 in Section XIII.

B-16-17-15



TIL

11800 SOUTH STONY ISLAND AVENUE • CHICAGO, ILLINOIS 60617 (312) 646-6202 • FAX (312) 646-6381

Certified Mail # Z781269867

August 3, 1996

Mr. Mark A. Schollenberger, P.E. Illinois Environmental Protection Agency Bureau of Land - Permit Section 2200 Churchill Road P.O. Box 19276 Springfield, IL 62794-9276

Re: Request for Class 1 Permit Modification RCRA Part B Permit Log B-16 Clean Harbors of Chicago, Inc.

Dear Mr. Schollenberger:

Clean Harbors of Chicago, Inc. (CHCI) is pleased to submit one (1) original and two copies of a Class 1 Permit Modification to to designate a new Alternate Emergency Coordinator and to reflect an area code change for the Emergency Coordinator. Page 1 of Table G-1 of the permit application has been modified to reflect the new coordinator and area code change. A copy of the revised page is enclosed.

CHCI shall in accordance with 35 IAC 703.281(a)(2), notify all persons on the facility's mailing list within 90 days.

If you have any further questions concerning this modification, please contact me at (312)646-6202.

Sincerely,

Clean Harbors of Chicago, Inc.

To Fackly

James R. Laubsted

Facility Compliance Manager

AUG - 9 1996
PERMIT SECTION

Coordinator/ Alternate

Address and Telephone Number

1. Primary Emergency Coordinator

James R. Laubsted, Compliance Manager Clean Harbors of Chicago, Inc. 11800 S. Stony Island Avenue, Chicago, IL 60617 (312) 646-6202

Home Address:

24-hr emergency beeper: 1-800-884-4914

2. First Alternate

Robert O'Brien, Ast. General Manager Clean Harbors of Chicago, Inc. 11800 S. Stony Island Avenue, Chicago, IL 60617 (312) 646-6202

Home Address:


24-hr emergency beeper: 1-800-884-4914

3. Second Alternate

Gregory Jones, Operations Manager Clean Harbors of Chicago, Inc. 11800 S. Stony Island Avenue, Chicago, IL 60617 (312) 646-6202

Home Address:

24-hr emergency beeper: 1-800-884-4914





11800 SOUTH STONY ISLAND AVENUE • CHICAGO, ILLINOIS 60617 (312) 646-6202 • FAX (312) 646-6381

Certified Mail # Z781269861

July 16, 1996

Mr. Mark A. Schollenberger, P.E. Illinois Environmental Protection Agency Bureau of Land - Permit Section 2200 Churchill Road P.O. Box 19276 Springfield, IL 62794-9276

Re: Request for Class 1 Permit Modification

RCRA Part B Permit Log B-16
Clean Harbors of Chicago, Inc.

Dear Mr. Schollenberger:

Clean Harbors of Chicago, Inc. (CHCI) is pleased to submit one (1) original and two (2) copies of a Class 1 Permit Modification to change the Emergency Coordinator's 24-hour emergency beeper numbers. Page 1 of Table G-1 of the permit application has been modified to reflect the new numbers. A copy of the revised page is enclosed.

CHCI shall in accordance with 35 IAC 703.281(a)(2), notify all persons on the facility's mailing list within 90 days.

If you have any further questions concerning this modification, please contact me at (312) 646-6202.

Sincerely,

clean Harbors of Chicago, Inc.

James R. Laubsted

Facility Compliance Manager

~ H Junglis

Coordinator/ Alternate

Address and Telephone Number

1. Primary Emergency Coordinator

James R. Laubsted, Compliance Manager Clean Harbors of Chicago, Inc. 11800 S. Stony Island Avenue, Chicago, IL 60617 (312) 646-6202

Home Address:

24-hr emergency beeper: 1-800-884-4914

2. First Alternate

Todd Dykton, General Manager Clean Harbors of Chicago, Inc. 11800 S. Stony Island Avenue, Chicago, IL 60617 (312) 646-6202

Home Address: non-respons

24-hr emergency beeper: 1-800-884-4914

3. Second Alternate

Gregory Jones, Operations Manager Clean Harbors of Chicago, Inc. 11800 S. Stony Island Avenue, Chicago, IL 60617 (312) 646-6202

Home Address:

24-hr emergency beeper: 1-800-884-4914



RECEIVED

MAY 31 1996

OFFICE OF RCRA WASTE MANAGEMENT DIVISION EPA, REGION V

NOTICE

To: Facility Mailing List Addresses

Re: Notice of RCRA Class 2 Modification

Notice is hereby given to all interested persons that Clean Harbors of Chicago, Inc. (CHCI), a wholly-owned subsidiary of Clean Harbors, Inc. and a permitted hazardous waste treatment, storage, and transfer facility located at 11800 South Stony Island Avenue in Chicago, IL has filed a Class 2 Permit Modification with the Illinois Environmental Protection Agency (IEPA) for authorization to store and blend additional hazardous waste codes for reuse as a supplemental hazardous waste fuel; and to make several piping modifications for maintenance activities and process efficiency to the fuel blending system.

Pursuant to 35 IAC 703.282(b), CHCI announces a 60 day comment period beginning May 29, 1996 and ending July 27, 1996 during which all interested parties have the opportunity to review the modification request and to submit written comments to the IEPA. CHCI will hold an informational public meeting open to all interested persons to discuss the proposed modification. The meeting will be held on Wednesday, June 26, 1996 from 7:00-9:00 P.M. at Olive-Harvey College, 10001 S. Woodlawn Avenue, Chicago, IL.

Copies of the modification request are available for review during normal business hours at CHCI's business office at 11800 S. Stony Island Avenue, Chicago, IL or at IEPA's office in Springfield, IL. A copy of CHCI's compliance history during the life of its existing permit is available from IEPA. Additional information on the modification request is available by contacting Mr. James Laubsted at Clean Harbors of Chicago, Inc., 11800 S. Stony Island Avenue, Chicago, IL 60617, or at (312)646-6202. Information regarding application viewing time and place, CHCI's existing permit, applicable regulatory requirements, permit modification procedures, and CHCI's compliance history may be obtained from Ms. Mara McGinnis, IEPA, 2200 Churchill Road, Springfield, IL 62794-9276 or at (217) 524-3300.



NOTICE to Facility Mailing List May 28, 1996 Page 2

This notice is provided to you as an addressee on the CHCI mailing list maintained by IEPA. A copy of the notice appeared in the $\underline{\text{Daily Southtown}}$ on May 28, 1996.

If you have any further questions regarding this notice or the proposed modification, please feel free to contact me at (312) 646-6202.

Sincerely,

James R. Laubsted CHCI Facility Compliance Manager

Attachment: Facility Mailing List

The Southtown Economist Attn: News Desk 5959 S. Harlem Avenue Chicago, Illinois 60638

The Times
Attn: News Desk
Post Office Box 5553
2 River Place Mall, Suite I
Lansing, Illinois 60438

Chicago Tribune Attn: News Desk 435 North Michigan Avenue Chicago, Illinois 60611

Chicago Sun-Times Attn: News Desk 401 North Wabash Chicago, Illinois 60611

George Hamper 5HRP-8J U.S. EPA - Region V RCRA Permitting Branch 77 West Jackson Boulevard Chicago, Illinois 60604

U.S. EPA-Region 5 Waste Mgmt/Technical Programs Attn: Juana Rojo HRP-8J 77 West Jackson Chicago, Illinois 60604

The Honorable Paul Simon United States Senator 230 S. Dearborn, Suite 3892 Chicago, Illinois 60604

The Honorable Carol Mosely Braun United States Senator 230 S. Dearborn, Suite 3996 Chicago, Illinois 60604 Star Publications
Attn: News Desk
1526 Otto Blvd.
Chicago Heights, Illinois 60411

The Hegewisch Herald Attn: News Desk 13256 So. Baltimore Chicago, Illinois 60633

City News Bureau Attn: News Desk 35 E. Wacker Dr., Suite 792 Chicago, Illinois 60601

Hammond Times 601 45th Ave. Munster, IN 46321

The Honorable Mel Reynolds United States Representative 525 E. 103rd Street Chicago, Illinois 60628

The Honorable Donne Trotter Illinois State Senator 7140 South Exchange Chicago, Illinois 60649

The Honorable Emil Jones Illinois State Senator 507 West 111th Street Chicago, Illinois 60628

The Honorable William Shaw Illinois State Representative 3300 West 159th Street Markham, Illinois 60426

State of Illinois Office of Attorney General Environmental Law Division 500 South 2nd Street Springfield, Illinois 62701 WMAQ/AM

Attn: Public Service Director Merchandise Mart Plaza Chicago, Illinois 60654

WJOB Radio Attn: Public Service Director 6405 Olcott Avenue Hammond, Indiana 46320

WLS-TV Attn: Public Service Director 190 N. State Chicago, Illinois 60601

WBEZ Radio Attn: Public Service Director 105 W. Adams Chicago, Illinois 60602

The Honorable Frank Giglio Illinois State Representative 1062 Sibley Boulevard Calumet City, Illinois 60409

The Honorable Clem Balanoff Illinois State Representative 10100 S. Ewing Avenue Chicago, Illinois 60617

The Honorable Thomas Dart Illinois State Representative 10231 South Western Avenue Chicago, Illinois 60643

The Honorable Todd Stroger Illinois State Representative 8539 South Cottage Grove Chicago, Illinois 60619

Deanna Glosser Illinois Dept. of Conservation Division of Natural Heritage 524 South Second Street Springfield, Illinois 62701-1787

Bill Omohundro P-19J U.S. EPA - Region V Office of Public Affairs 77 West Jackson Boulevard Chicago, Illinois 60604

State's Attorney Cecil Partee Daley Civic Center, Room 500 Chicago, Illinois 60602

IEPA - Division Manager of Land Pollution Control Maywood Regional Office 1701 First Avenue Maywood, Illinois 60153

Illinois State Chamber of Commerce 215 East Adams Street Springfield, Illinois 62701

Juan Thomas
Illinois Department of Public
Health
4212 West St. Charles Road
Bellwood, Illinois 60104

David Thomas
Hazardous Waste Research
& Information Center
1 East Hazelwood Drive
Champaign, Illinois 61820

Chief Ill. State Natural History Survey 607 East Peabody Champaign, Illinois 61820

Chief Illinois State Geological Survey 615 East Peabody Champaign, Illinois 61820

Illinois State Water Survey 2204 Griffith Drive Champaign, Illinois 61820 Tim Warren
DENR
325 West Adams Street
Springfield, Illinois 62704

Ill. Historic Preservation Agency Preservation Services 1 Old State Capitol Plaza Springfield, Illinois 62701-1512

Illinois Dept. of Convservation Resource Management 600 North Grand Avenue West Springfield, Illinois 62706

Richard Phelan, Chairperson Cook County Board 118 N. Clark, Room 567 Chicago, Illinois 60602

David D. Orr, Clerk Cook County Board 118 N. Clark, Room 434 Chicago, Illinois 60602

Dr. Karen Scott Cook County Public Health 1500 S. Maybrook Maywood, Illinois 60153

Robert D. Roache Cook County Env'l. Control Maybrook Civic Center, Room 202 1500 Maybrook Dr. Maywood, Illinois 60153

Jack Hickey Cook County Sheriff - ESDA 1401 S. Maybrook Maywood, Illinois 60153

Ms. Chris Flannery Cook County Public Health 1500 S. Maybrook Maywood, Illinois 60153 Illinois Dept. of Transportation Division of Water Resources DOT Administration Bldg. Room 339 Springfield, Illinois 62794

DENR 325 W. Adams St. Springfield, Illinois 62704

Illinois Department of Commerce and Community Affairs 620 East Adams Street Springfield, Illinois 62701

Walter Kozubowski, Clerk Chicago City Hall 121 N. LaSalle Chicago, Illinois 60602

Tim Degnan, Director Intergovernmental Affairs City Hall, Room 603 121 N. LaSalle Chicago, Illinois 60602


John Buchanan, Alderman 10th Ward 9618 S. Commercial Chicago, Illinois 60617

Alderman Robert Shaw 9th Ward 11004 S. Michigan Chicago, Illinois 60628-5642

Committee on Energy, Environmental Protection & Public Utilities 121 North LaSalle Chicago, Illinois 60602

Streets & Sanitation Attn: Joe Brett 2451 S. Ashland Chicago, Illinois 60608

City of Chicago



Ms. Jerry Grubman Illinois ESDA 1 Heritage Plaza, Suite 8 7501 Lemont Road Woodridge, Illinois 60602

Cecil Lue-Hing, Director Research & Development Metro Water Reclamation District 100 East Erie Chicago, Illinois 60611

Chicago Dept. of Health Attn: Roger Cieslik Bureau of Health Regulations 50 W. Washington, Room CL88 Chicago, Illinois 60602

City of Chicago Fire Dept. Attn: John M. Eversole Hazardous Incidents Team 55 W. Illinois St. Chicago, Illinois 60610

Mayor Jerry Genova Calumet City, City Hall 204 Pulaski Road Calumet City, Illinois 60409

Mayor Eldreth A. Rundlett 14450 Mainstee Ave. Burnham, Illinois 60633

Nancy Dobrowski, Village Clerk 14450 Manistee Ave. Burnham, Illinois 60633

Mayor Don Hart 14014 Park Avenue Dolton, Illinois 60419

Foster Milhouse South Deering Association 10404 S. Oglesby Chicago, Illinois 60617 Mayor Richard Daley Chicago City Hall 121 N. LaSalle Chicago, Illinois 60602

non-responsive

Mayor Edward Kipley, Jr. 325 West 142nd St. Riverdale, Illinois 60627

Marceline H. Phalen Riverdale Village Clerk 325 West 142nd St. Riverdale, Illinois 60627

Frank Albert
Port Authority
12800 Butler Drive
Chicago, Illinois 60617

Mary T. Ryan Waste Mangement, Inc. P.O. Box 1309 Calumet City, Illinois 60409

James Doyle CWM Chemical Services, Inc. 11700 South Stony Island Ave. Chicago, Illinois 60617

Tom Tomaszewski CID Processing Center Post Office Box 1296 Calumet City, Illinois 60409



Calumet Water Reclamation Plant 400 East 130th Street Chicago, Illinois 60628

Developing Communities Project Loretta Augustine 9441 S. Ada Street Chicago, Illinois 60620

Hazel Johnson People for Community Recovery 13116 South Ellis Avenue Chicago, Illinois 60627

Virginia Cap H.O.P.E. 13031 Carondolet Chicago, Illinois 60633

UNO
Attn: Mary Ellen Montes
or Bruce Ornstein
2938 East 91 Street
Chicago, Illinois 60617


Barack Obama Calumet Area Religious Conference 351 East 113 Street Chicago, Illinois

Marina Brynes CURE/PIPCO 9716 So. Van Vlissingen Road Chicago, Illinois 60617

Joan Van Haren Calumet City Cares 807 Forsythe #12 Calumet City, Illinois 60409

John Young Avalon Trails Improvement Assn. 2710 East 127 Street Chicago, Illinois 60633





Kevin Greene Center for Neighborhood Technology 2125 W. North Avenue Chicago, Illinois 60647



Jim Amendola Hegewisch Chamber of Commerce 13547 South Brandon Avenue Chicago, Illinois 60633

Mike Pavich South Chicago Chamber of Commerce 9204 Commercial Avenue Chicago, Illinois 60617

Calumet Area Industrial Commission 1000 East 111 Street Chicago, Illinois 60608

non-responsive

Shirley Petrisha Concerned Citizens of Burnham 14236 Greenbay Avenue Burnham, Illinois 60633

Irma Dixon ACORN 13387 S. Langley Ave. Chicago, Illinois 60627

Maggy Davis ACORN 1143 E. 131ST ST. Chicato, Illinois 60627

Hegewisch Community Committee 13248 S. Baltimore Avenue Chicago, Illinois 60633

Sam Falbo Fair Elms Civic Organization 10942 Avenue F Chicago, Illinois 60617

Della Daniels-Fuqua Library, Olive-Harvey College 10001 South Woodlawn Avenue Chicago, Illinois 60628

League of Women Voters of Illinois 332 South Michigan Avenue Chicago, Illinois 60604

MONTI Communications, Inc. Rural Route 16, Box 532 Bloomington, Illinois 61704 Ed Borowski Avalon Trails Improvement Assn. 12917 Carondolet Ave. Chicago, Illinois 60633

Chuck Gregorsen, President Pullman Civic Organization 614 East 113 Street Chicago, Illinois 60628

Charlie Cray Greenpeace Action 1017 West Jackson Blvd. Chicago, Illinois 60607

South East Chicago Development Comm. 9206 Commercial, Suite 212 Chicago, Illinois 60617

S.E. Chicago Development Comm. 9204 Commercial Ave., Suite 212 Chicago, Illinois 60617


East Side Chamber of Commerce 3658 East 106 Street Chicago, Illinois 60617

Cheryl Frank Lee News Service Statehouse Press Room Springfield, Illinois 62706

George W. Nicholas Nicholas & Assoc., Inc. 32 Lynn Drive Hawthorn Woods, IL 60047

Sulcon, Inc.
Attn: Dan Crawmer
Post Office Box 427
Champaign, Illinois 61820







Harvey Sheldon Chicago Assn. of Commerce & Industry 3500 Three First National Plaza Chicago, Illinois 60602

Ms. Eileen Johnston Working Together to Manage Waste 505 Maple Avenue Wilmette, Illinois 60091

non-responsive

Edwin Eisendrath
Committee on Energy
Environmental Protection and
Public Utilities
City Hall
121 North LaSalle
Chicago, Illinois 60602

Maria Michalski C-CEP 14406 Chicago Road Dolton, IL 60419

William J. Geary Clean Harbors 1200 Crown Colony Drive Quincy, MA 02269

non-responsive

James R. Laubsted Clean Harbors 11800 S. Stony Island Avenue Chicago, IL 60617

non-responsive

Maxine & Fran Rusdorf S.E. Sportsmens Club 11312 Avenue J Chicago, IL 60617



non-responsive

Envirite Corporation Attn: Operations Manager 16435 South Center Avenue Harvey, Illinois 60426

non-responsive non-responsive

Ollie Carter, Jr. New Directions 449 W. 115 Street Chicago, IL 60628

Paul Ahearn Clean Harbors 1200 Crown Colony Drive Quincy, MA 02269

non-responsive

Joseph McNally Clean Harbors 11800 S. Stony Island Avenue Chicago, IL 60617

non-responsive

Charles Logullo 32nd District Fair Elm Civic League 11129 Avenue C Chicago, IL 60617 American Ecology Services, Inc. Attn: Richard M. Miller 127 East 59th Street New York, NY 10022

non-responsive

Barbara Mullarkey Waste Ideas Network Post Office Box 946 Oak Park, Illinois 60303

Dorothy Gunn Clerk, Pollution Control Bd. 100 W. Randolph Street Ste 11-600 Chicago, IL 60601

Mary Sumner 32nd District Environmental Task Force 9809 Avenue H Chicago, IL 60617

John Pastirik Southeast Environmental Task Force 10716 Avenue F Chicago, IL 60617

non-responsive

James E. Landing Lake Calumet Study Comittee 2135 W. Cortez Chicago, IL 60622

Marian Byrnes Southeast Environmental Task Force 10100 S. Ewing Chicago, IL 60617

David Dillion Calument Areas Ind. Commission 111 West Washington, Ste. 719 Chicago, IL 60602

non-responsive



Bowden Quinn Chicago Legal Clinic 2938 E. 91st Street Chicago, IL 60617



May 28, 1996

Re: Clean Harbors of Chicago, Inc.

Notification of Class 1 Permit Modification

Dear Interested Party:

Clean Harbors of Chicago, Inc. (CHCI) is a hazardous waste treatment, storage, and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHCI currently operates under a RCRA Part B permit issued by the IL Environmental Protection Agency (IEPA) on September 30, 1993.

On September 1, 1995 CHCI requested a Class 1 permit modification to the facility's Contingency Plan to include emergency procedures for handling releases of compressed gases and to identify the locations and types of compressed gases. This request was required by the RCRA Part B Permit. The IEPA approved the Class 1 permit modification request on February 28, 1996.

On October 3, 1995 CHCI requested a Class 1 permit modification to provide corrections to information in the Groundwater Monitoring, Compliance Monitoring section of the RCRA Part B Permit. The subject of this modification was to provide corrections and additional well information to the Well Location and Construction Table of the Permit. This request was required by the RCRA Part B Permit. The IEPA approved the Class 1 permit modification request on February 28, 1996.

On October 26, 1995 CHCI requested a Class 1 permit modification to the facility's Inspection Plan to include additional inspection and testing procedures for the fire protection system. This request was submitted in response to a request from the IEPA. The IEPA approved this Class 1 modification request on February 28, 1996.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations at 35 IAC 703.281(a)(2) which require CHCI to send a notice of the modification to all persons on the facility mailing list within 90 days after the Agency approves the request.

If you have any questions, please do not hesitate to contact me at (312) 646-6202.

Sincerely,

James R. Laubsted

Facility Compliance Manager

M. Fanfal D

cc: Facility Mailing List

The Southtown Economist Attn: News Desk 5959 S. Harlem Avenue Chicago, Illinois 60638

The Times
Attn: News Desk
Post Office Box 5553
2 River Place Mall, Suite I
Lansing, Illinois 60438

Chicago Tribune Attn: News Desk 435 North Michigan Avenue Chicago, Illinois 60611

Chicago Sun-Times Attn: News Desk 401 North Wabash Chicago, Illinois 60611

George Hamper 5HRP-8J U.S. EPA - Region V RCRA Permitting Branch 77 West Jackson Boulevard Chicago, Illinois 60604

U.S. EPA-Region 5
Waste Mgmt/Technical Programs
Attn: Juana Rojo HRP-8J
77 West Jackson
Chicago, Illinois 60604

The Honorable Paul Simon United States Senator 230 S. Dearborn, Suite 3892 Chicago, Illinois 60604

The Honorable Carol Mosely Braun United States Senator 230 S. Dearborn, Suite 3996 Chicago, Illinois 60604 Star Publications
Attn: News Desk
1526 Otto Blvd.
Chicago Heights, Illinois 60411

The Hegewisch Herald Attn: News Desk 13256 So. Baltimore Chicago, Illinois 60633

City News Bureau Attn: News Desk 35 E. Wacker Dr., Suite 792 Chicago, Illinois 60601

Hammond Times 601 45th Ave. Munster, IN 46321

The Honorable Mel Reynolds United States Representative 525 E. 103rd Street Chicago, Illinois 60628

The Honorable Donne Trotter Illinois State Senator 7140 South Exchange Chicago, Illinois 60649

The Honorable Emil Jones Illinois State Senator 507 West 111th Street Chicago, Illinois 60628

The Honorable William Shaw Illinois State Representative 3300 West 159th Street Markham, Illinois 60426

State of Illinois Office of Attorney General Environmental Law Division 500 South 2nd Street Springfield, Illinois 62701 WMAO/AM

Attn: Public Service Director Merchandise Mart Plaza Chicago, Illinois 60654

WJOB Radio Attn: Public Service Director 6405 Olcott Avenue Hammond, Indiana 46320

WLS-TV Attn: Public Service Director 190 N. State Chicago, Illinois 60601

WBEZ Radio Attn: Public Service Director 105 W. Adams Chicago, Illinois 60602

The Honorable Frank Giglio Illinois State Representative 1062 Sibley Boulevard Calumet City, Illinois 60409

The Honorable Clem Balanoff Illinois State Representative 10100 S. Ewing Avenue Chicago, Illinois 60617

The Honorable Thomas Dart Illinois State Representative 10231 South Western Avenue Chicago, Illinois 60643

The Honorable Todd Stroger Illinois State Representative 8539 South Cottage Grove Chicago, Illinois 60619

Deanna Glosser Illinois Dept. of Conservation Division of Natural Heritage 524 South Second Street Springfield, Illinois 62701-1787

Bill Omohundro P-19J U.S. EPA - Region V Office of Public Affairs 77 West Jackson Boulevard Chicago, Illinois 60604

State's Attorney Cecil Partee Daley Civic Center, Room 500 Chicago, Illinois 60602

IEPA - Division Manager of Land Pollution Control Maywood Regional Office 1701 First Avenue Maywood, Illinois 60153

Illinois State Chamber of Commerce 215 East Adams Street Springfield, Illinois 62701

Juan Thomas
Illinois Department of Public
Health
4212 West St. Charles Road
Bellwood, Illinois 60104

David Thomas
Hazardous Waste Research
& Information Center
1 East Hazelwood Drive
Champaign, Illinois 61820

Chief Ill. State Natural History Survey 607 East Peabody Champaign, Illinois 61820

Chief Illinois State Geological Survey 615 East Peabody Champaign, Illinois 61820

Illinois State Water Survey 2204 Griffith Drive Champaign, Illinois 61820 Tim Warren
DENR
325 West Adams Street
Springfield, Illinois 62704

Ill. Historic Preservation Agency Preservation Services 1 Old State Capitol Plaza Springfield, Illinois 62701-1512

Illinois Dept. of Convservation Resource Management 600 North Grand Avenue West Springfield, Illinois 62706

Richard Phelan, Chairperson Cook County Board 118 N. Clark, Room 567 Chicago, Illinois 60602

David D. Orr, Clerk Cook County Board 118 N. Clark, Room 434 Chicago, Illinois 60602

Dr. Karen Scott Cook County Public Health 1500 S. Maybrook Maywood, Illinois 60153

Robert D. Roache Cook County Env'l. Control Maybrook Civic Center, Room 202 1500 Maybrook Dr. Maywood, Illinois 60153

Jack Hickey Cook County Sheriff - ESDA 1401 S. Maybrook Maywood, Illinois 60153

Ms. Chris Flannery Cook County Public Health 1500 S. Maybrook Maywood, Illinois 60153 Illinois Dept. of Transportation Division of Water Resources DOT Administration Bldg. Room 339 Springfield, Illinois 62794

DENR 325 W. Adams St. Springfield, Illinois 62704

Illinois Department of Commerce and Community Affairs 620 East Adams Street Springfield, Illinois 62701

Walter Kozubowski, Clerk Chicago City Hall 121 N. LaSalle Chicago, Illinois 60602

Tim Degnan, Director Intergovernmental Affairs City Hall, Room 603 121 N. LaSalle Chicago, Illinois 60602

John Buchanan, Alderman 10th Ward 9618 S. Commercial Chicago, Illinois 60617

Alderman Robert Shaw 9th Ward 11004 S. Michigan Chicago, Illinois 60628-5642

Committee on Energy, Environmental Protection & Public Utilities 121 North LaSalle Chicago, Illinois 60602

City of Chicago Streets & Sanitation Attn: Joe Brett 2451 S. Ashland Chicago, Illinois 60608

Ms. Jerry Grubman Illinois ESDA 1 Heritage Plaza, Suite 8 7501 Lemont Road Woodridge, Illinois 60602

Cecil Lue-Hing, Director Research & Development Metro Water Reclamation District 100 East Erie Chicago, Illinois 60611

Chicago Dept. of Health Attn: Roger Cieslik Bureau of Health Regulations 50 W. Washington, Room CL88 Chicago, Illinois 60602

City of Chicago Fire Dept. Attn: John M. Eversole Hazardous Incidents Team 55 W. Illinois St. Chicago, Illinois 60610

Mayor Jerry Genova Calumet City, City Hall 204 Pulaski Road Calumet City, Illinois 60409

Mayor Eldreth A. Rundlett 14450 Mainstee Ave. Burnham, Illinois 60633

Nancy Dobrowski, Village Clerk 14450 Manistee Ave. Burnham, Illinois 60633

Mayor Don Hart 14014 Park Avenue Dolton, Illinois 60419

Foster Milhouse South Deering Association 10404 S. Oglesby Chicago, Illinois 60617 Mayor Richard Daley Chicago City Hall 121 N. LaSalle Chicago, Illinois 60602

Judy Evans, City Clerk 14014 Park Avenue Dolton, Illinois 60419

Mayor Edward Kipley, Jr. 325 West 142nd St. Riverdale, Illinois 60627

Marceline H. Phalen Riverdale Village Clerk 325 West 142nd St. Riverdale, Illinois 60627

Frank Albert
Port Authority
12800 Butler Drive
Chicago, Illinois 60617

Mary T. Ryan Waste Mangement, Inc. P.O. Box 1309 Calumet City, Illinois 60409

James Doyle CWM Chemical Services, Inc. 11700 South Stony Island Ave. Chicago, Illinois 60617

Tom Tomaszewski CID Processing Center Post Office Box 1296 Calumet City, Illinois 60409

D'Andrea Adams 9529 S. Clyde Chicago, Illinois 60617 Calumet Water Reclamation Plant 400 East 130th Street Chicago, Illinois 60628

Developing Communities Project Loretta Augustine 9441 S. Ada Street Chicago, Illinois 60620

Hazel Johnson People for Community Recovery 13116 South Ellis Avenue Chicago, Illinois 60627

Virginia Cap H.O.P.E. 13031 Carondolet Chicago, Illinois 60633

UNO
Attn: Mary Ellen Montes
or Bruce Ornstein
2938 East 91 Street
Chicago, Illinois 60617

Barack Obama Calumet Area Religious Conference 351 East 113 Street Chicago, Illinois

Marina Brynes CURE/PIPCO 9716 So. Van Vlissingen Road Chicago, Illinois 60617

Joan Van Haren Calumet City Cares 807 Forsythe #12 Calumet City, Illinois 60409

John Young Avalon Trails Improvement Assn. 2710 East 127 Street Chicago, Illinois 60633

League of Women Voters 332 S. Michigan Avenue Chicago, Illinois 60603

Kevin Greene Center for Neighborhood Technology 2125 W. North Avenue Chicago, Illinois 60647

Daniel Lee 161 East 121st Place Chicago, Illinois 60628

Valerie Johnson 13141 S. Langley Chicago, Illinois 60627

Rosemary Diorio 10912 S. Hoxie Chicago, Illinois 60617

Jim Amendola Hegewisch Chamber of Commerce 13547 South Brandon Avenue Chicago, Illinois 60633

Mike Pavich South Chicago Chamber of Commerce 9204 Commercial Avenue Chicago, Illinois 60617

Calumet Area Industrial Commission 1000 East 111 Street Chicago, Illinois 60608 Tom & Cindy McMahon 639 E. 111th Street Chicago, Illinois 60628

Shirley Petrisha Concerned Citizens of Burnham 14236 Greenbay Avenue Burnham, Illinois 60633

Irma Dixon ACORN 13387 S. Langley Ave. Chicago, Illinois 60627

Maggy Davis ACORN 1143 E. 131ST ST. Chicato, Illinois 60627

Hegewisch Community Committee 13248 S. Baltimore Avenue Chicago, Illinois 60633

Sam Falbo Fair Elms Civic Organization 10942 Avenue F Chicago, Illinois 60617

Della Daniels-Fuqua Library, Olive-Harvey College 10001 South Woodlawn Avenue Chicago, Illinois 60628

League of Women Voters of Illinois 332 South Michigan Avenue Chicago, Illinois 60604

MONTI Communications, Inc. Rural Route 16, Box 532 Bloomington, Illinois 61704 Ed Borowski Avalon Trails Improvement Assn. 12917 Carondolet Ave. Chicago, Illinois 60633

Chuck Gregorsen, President Pullman Civic Organization 614 East 113 Street Chicago, Illinois 60628

Charlie Cray Greenpeace Action 1017 West Jackson Blvd. Chicago, Illinois 60607

> South East Chicago Development Comm. 9206 Commercial, Suite 212 Chicago, Illinois 60617

S.E. Chicago Development Comm. 9204 Commercial Ave., Suite 212 Chicago, Illinois 60617

East Side Chamber of Commerce 3658 East 106 Street Chicago, Illinois 60617

Cheryl Frank
Lee News Service
Statehouse Press Room
Springfield, Illinois 62706

George W. Nicholas Nicholas & Assoc., Inc. 32 Lynn Drive Hawthorn Woods, IL 60047

Sulcon, Inc. Attn: Dan Crawmer Post Office Box 427 Champaign, Illinois 61820



Harvey Sheldon Chicago Assn. of Commerce & Industry 9716 Stoney Hill Lane 3500 Three First National Plaza Chicago, Illinois 60602

Ms. Eileen Johnston Working Together to Manage Waste 505 Maple Avenue Wilmette, Illinois 60091

Edward R. Allen 8135 River Drive Morton Grove, Illinois 60093

Edwin Eisendrath Committee on Energy Environmental Protection and Public Utilities City Hall 121 North LaSalle Chicago, Illinois 60602

Maria Michalski C-CEP 14406 Chicago Road Dolton, IL 60419

William J. Geary Clean Harbors 1200 Crown Colony Drive Quincy, MA 02269

A.C. Granfield 1311 Hawkins Court St. Charles, IL 60174

James R. Laubsted Clean Harbors 11800 S. Stony Island Avenue Chicago, IL 60617

Nancy A. Kookich Feinberg 9516 S. Euclid Chicago, IL 60617

Maxine & Fran Rusdorf S.E. Sportsmens Club 11312 Avenue J Chicago, IL 60617

Charles & Vicki Jurka 4622 W. 122nd Street Alsip, IL 60658

Esther Pala Resident 11608 Torrence Chicago, IL 60617

Linda Kissinger Charlotte, NC 28226

Envirite Corporation Attn: Operations Manager 16435 South Center Avenue Harvey, Illinois 60426

Mary Ross 506 Madison Avenue Garden Apartment Oak Park, Illinois 60302

Michael Behm 2300 Clarendon, Suite 407 Arlington, Virginia 22201

Ollie Carter, Jr. New Directions 449 W. 115 Street Chicago, IL 60628

Paul Ahearn Clean Harbors 1200 Crown Colony Drive Quincy, MA 02269

Gordon Mayer P.O. Box 49-808 Chicago, IL 60649

Robert Sheahan 309 Chappel Calumet City, IL 60409

Joseph McNally Clean Harbors 11800 S. Stony Island Avenue Chicago, IL 60617

Beatrice L. Feltan 9522 S. Euclid Avenue Chicago, IL 60617

Scott Saef 333 E. Ontario 902B Chicago, IL 60611

Charles Logullo 32nd District Fair Elm Civic League 11129 Avenue C Chicago, IL 60617

American Ecology Services, Inc. Attn: Richard M. Miller 127 East 59th Street New York, NY 10022

Sid Marder 215 East Adams Street Springfield, Illinois 62701

Barbara Mullarkey Waste Ideas Network Post Office Box 946 Oak Park, Illinois 60303

> Dorothy Gunn Clerk, Pollution Control Bd. 100 W. Randolph Street Ste 11-600 Chicago, IL 60601

Mary Sumner 32nd District Environmental Task Force 9809 Avenue H Chicago, IL 60617

John Pastirik Southeast Environmental Task Force 10716 Avenue F Chicago, IL 60617

Deb Watson 13122 Avenue O Chicago, IL 60633

James E. Landing Lake Calumet Study Comittee 2135 W. Cortez Chicago, IL 60622

Marian Byrnes Southeast Environmental Task Force 10100 S. Ewing Chicago, IL 60617

David Dillion Calument Areas Ind. Commission 111 West Washington, Ste. 719 Chicago, IL 60602

Theresa L. Lopez 12856 S. Marquette Avenue Chicago, IL 60637

Bowden Quinn J Chicago Legal Clinic 1 2938 E. 91st Street B Chicago, IL 60617

Jim Doyle 1105 Fagan Road Batavia, IL 60510



ENVIRONMENTAL SERVICES, INC.

11800 South Stony Island Avenue • Chicago, IL 60617 (312) 646-6202 • FAX (312) 646-6381

Certified Mail #P350678767

September 13, 1995

Mr. Robert Watson, P.E.
Environmental Protection Engineer
Illinois Environmental Protection Agency
Bureau of Land
2200 Churchill Road
Springfield, IL 62794-9276

Dear Mr. Watson:

This letter is concerning our conversation of today regarding submittal of information as a requirement of the Clean Harbors of Chicago, Inc. RCRA Part B Permit (RCRA Log No. B-16). Information required by a Container Special Condition, Section I, Part E, Number 8 (pages I-7 and I-8) was submitted on September 1, 1995.

A revised Contingency Plan was submitted as required by the Special Condition. As a point of clarification, the submittal was a Class 1 modification because the Contingency Plan was modified to identify the type and locations of compressed gas wastes at the facility, and emergency procedures for dealing with releases of compressed gas wastes.

Additionally, one revised page was not listed as revised in the cover letter. The additional revised page is in Table G-3, , page 5 of the Section G Tables. The revised portions are all in capital letters. A copy of the page is included and should be substituted for the page submitted September 1st.

If you have any questions concerning this letter, please contact me at (312)646-6202.

Sincerely,

RECEIVED

SEP 2 2 1995

PERMIT SECTION

James R. Laubsted Facility Compliance Manager

m W. Jantole



Emergency Assistance Organization Address/Telephone Number/ Service Provided

E. Sewer

Metropolitan Water Reclamation District of Greater Chicago Main Office 100 East Erie Street, Chicago, IL 60611 Contact: Sewer Discharge Monitoring Branch

Metropolitan Water Reclamation District of Greater Chicago Calumet Field Station 400 East 130th Street, Chicago, IL 60628 Contact: Mr. Francis Kody (312) 821-2071 -- Business Number (312) 787-3575 -- Emergency Number

Service: Sewer Discharge Monitoring

F. Emergency Response Contractors

- 1) Clean Harbors Environmental Services, Inc. 11800 SOUTH STONY ISLAND AVENUE, CHICAGO, IL 60617 Contact: Mr. Errol Fletcher (312) 646-5111
- 2) Si-Tech Industries 8758 SOUTH 78TH AVENUE, Bridgeview, IL 60455 Contact: Mr. Michael Sykora (708) 598-0502

Service: Provide emergency pumping, hauling and/or alternate disposal facility

3) ETSC 711 WEST MORSE AVENUE, SCHAUMBURG, IL 60193 CONTACT: NR. THOMAS RUSTHOVEN (708) 980-3872

SERVICE: PROVIDE EMERGENCY ASSISTANCE WITH COMPRESSED GASES







MAS

11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 60617 (312) 646-6202 • FAX (312) 646-6381

Via United Parcel Service

August 4, 1995

U.S. Environmental Protection Agency Waste Management Division - Illinois RCRA Section 77 West Jackson Boulevard Chicago, IL 60604-3590

Re: Clean Harbors of Chicago, Inc. Class 1 Permit Modification Request Newly-Listed Carbamate Codes

Dear Sir or Madam:

Clean Harbors of Chicago, Inc. (CHCI) is pleased to submit this Class 1 Permit Modification Request for authority to manage 58 newly-listed hazardous wastes finalized by USEPA on February 9, 1995 (see 60 FR 7824). The newly-listed codes are commercial chemical formulations and chemical manufacturing wastes containing carbamates, and are identified by USEPA waste code numbers K156-K161, U271, U277-U280, U364-U367, U372, U373, U375-U379, U381-U387, U389-U396, U400-U404, U407, U409-U411, P127, P128, P185, P188-P192, P194, P196-P199, and P201-P205. The new codes become effective on August 9, 1995.

In accordance with the requirements of 40 CFR 270.42(g), CHCI is enclosing a revised RCRA Part A form to notify the Agency of CHCI's intent to manage the new codes. Within 90 days of the date of the effective date of the rule, CHCI shall notify all persons on the facility mailing list of this Class 1 Permit Modification request. In addition, within 180 days of the date of the effective date, CHCI shall submit a Class 2 modification request for final Agency approval.

If you have any questions, please feel free to contact me at (617) 849-1800, extension 4473.

RECEIVED

AUG 0 9 1995

PERMIT SECTION

Sincerely,

Vail Q. Ohan TRL

Paul A. Ahearn Manager, Regulatory Compliance

Enclosure

cc: Stephen Pozner, Sr. Vice President Compliance and Health & Safety

"People and Technology Creating a Better Environment"



OF CHICAGO, INC.

11800 SOUTH STONY ISLAND AVENUE • CHICAGO, IL 6061 D (312) 646-6202 • FAX (312) 646-6381



APR 1 9 1995

April 17, 1995

OFFICE OF RCRA WASTE MANAGEMENT DIVISION EPA. REGION V

Re: Clean Harbors of Chicago, Inc.

Notification of Class 1 Permit Modification

Dear Interested Party:

Clean Harbors of Chicago, Inc. (CHCI) is a hazardous waste treatment, storage, and disposal (TSD) facility located at 11800 South Stony Island Avenue in Chicago, IL. CHCI currently operates under a RCRA Part B permit issued by the IL Environmental Protection Agency (IEPA) on November 4, 1993.

On December 14, 1994 CHCI requested a Class 1 permit modification to the facility's Waste Analysis Plan and Operating Record to allow CHCI to maintain its Generator Waste Material Profile Sheet (GWMPS) in a computerized data base format. The purpose of the request was to reduce the amount of paper-based records currently required to be maintained at this facility. Under the modification request, all of the information now contained on the GWMPS form would be accessible for viewing and printing via computer terminals located throughout the facility. The IEPA approved the Class 1 permit modification request on January 24, 1995.

This notice is being sent to you in accordance with IEPA's Class 1 permit modification regulations at 35 IAC 703.281(a)(2) which require CHCI to send a notice of the modification to all persons on the facility mailing list within 90 days after the Agency approves the request.

If you have any questions, please do not hesitate to contact me at (312) 646-6202.

Sincerely,

James R. Laubsted

Facility Compliance Manager

- H. Juftel

cc: Facility Mailing List